



BOMAG

FAYAT GROUP

User Manual



BOMAG TELEMATIC

Preface

Copyright protection

This document is protected by copyright. Any form of reproduction – even in form of extracts – with conventional or unconventional methods in all currently known and future types of media and representation as well as translations without the written permission of the publisher is prohibited.

We would like to point out, that the software designations such as brand names and product designations of the corresponding companies used in this document are generally protected by trademark, brand name and patent law.

The publisher reserves the right for changes to the product, its components (e.g. demonstration data) and to this documentation as well as further technical development of the product.

Google is a trademark of Google Inc.

Microsoft Excel is a registered trademark of Microsoft Corporation in the United States and other Countries.

Terms of business

The terms of business of BOMAG TELEMATIC apply for the use of BOMAG TELEMATIC. When initially logging in you must confirm that you have read and accept these terms of business. You can view and print out the terms of business of BOMAG TELEMATIC at any time under telematic.bomag.com.


Table of contents

Preface	3
Table of contents	4
1 General	7
1.1 Screen overview	8
1.2 Login / Logout	9
1.3 View & hide a panel	11
1.4 Alert window.....	13
1.5 Data selector	14
1.5.1 Date selector panel	14
1.5.2 Equipment / User selector panel.....	14
1.6 Table functions.....	16
1.6.1 Column header filters.....	16
1.6.2 Data sorting in tables	16
2 At A Glance	19
2.1 Overview	20
2.2 Select, center & follow or cancel following a machine	21
2.3 Alarms	22
2.4 Ping	23
2.5 Machine details	26
2.6 Equipment summary	29
2.7 User Settings	30
2.8 Show, hide & filter shapes	33
3 History	37
3.1 Overview	38
3.2 How to show a track (Breadcrumb trail).....	39
3.3 History export.....	40
4 Reports	41
4.1 Export reports	42
4.2 "Alarms" report	43
4.3 "Engine hours" report	46
4.4 "Engine ON/OFF" report	48
4.5 "Maintenance" report.....	49
4.6 "Maintenance Notes/History" report.....	55
4.7 "Productivity" report.....	56
4.8 "Equipment Utilization" report	57
4.9 "Fuel Consumption" report	59
4.10 "Job Costing" report	60
4.11 "Activity" report.....	64
4.12 "Idle vs. Work" report	65
4.13 "CANbus data" report.....	67
4.14 "Input/Output" report	69

5	Administration	71
5.1	Administration - Users.....	72
5.2	Administration - Vistas	76
5.3	Administration - Equipment.....	78
5.4	Administration - Fleets	83
5.5	Administration - Devices	84
5.6	Administration - Company data.....	86
5.7	Administration - User Settings	87
5.8	Administration – “GeoFencing”	89
5.8.1	“GeoFencing” - create, edit, delete	89
5.8.2	“GeoFence” editor	91
5.8.3	GeoFencing - assign to equipment.....	99
5.9	Administration - CANbus.....	101
5.9.1	CANbus - create, edit, delete.....	101
5.9.2	CAN bus - Assign to equipment.....	104
5.10	Administration - Status.....	107
5.10.1	Status - create, edit, delete	107
5.10.2	Status - assign to equipment	112
5.11	Administration - Power Management.....	115
5.11.1	Power Management - create, edit, delete.....	115
5.11.2	Power management - assign to equipment	118
5.12	Administration - Input/Output	121
5.12.1	Input/output - create, edit, delete	121
5.12.2	Input/output – assign to equipment.....	124
5.13	Administration - Curfew.....	127
5.13.1	Curfew - create, edit, delete.....	127
5.13.2	Curfew - assign to equipment	130
5.14	Administration - Maintenance	132
5.14.1	Maintenance - administration.....	132
5.14.2	Maintenance - create, edit, delete	137
5.14.3	Maintenance – assign to equipment.....	142
5.15	(Alarm) “Notification groups [Edit]” function	145

1 General

1.1 Screen overview

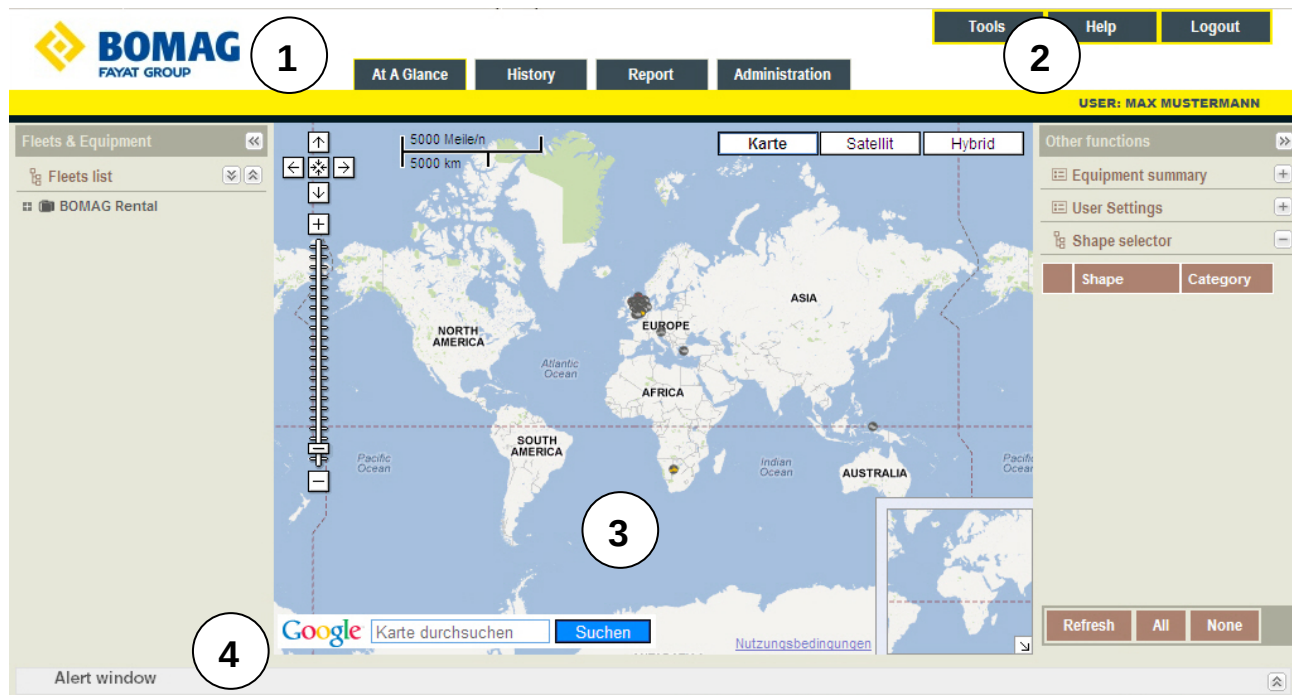

- | | | |
|---|----------------|--|
| 1 | Navigation | Switches between different screens, you can select from four menus |
| 2 | Functions | Functions "Tools", "Help" and "Logout" |
| 3 | Screen content | Displays content of the selected screen |
| 4 | Alert window | Lists alarms and messages from each machine |

Menus

Screens are part of four different menus:

- At A Glance
- History
- Report
- Administration

1.2 Login / Logout


How to login

- Navigate to the BOMAG TELEMATIC webpage by opening one of the following links in your internet browser.
 - o <http://telematic.bomag.com>
 - o <https://telematic.bomag.com> (for secure SSL connection)




- Enter "Username" and "Password".
- Click on "GO!".

If username and password are correct, the "At A Glance" page is displayed.

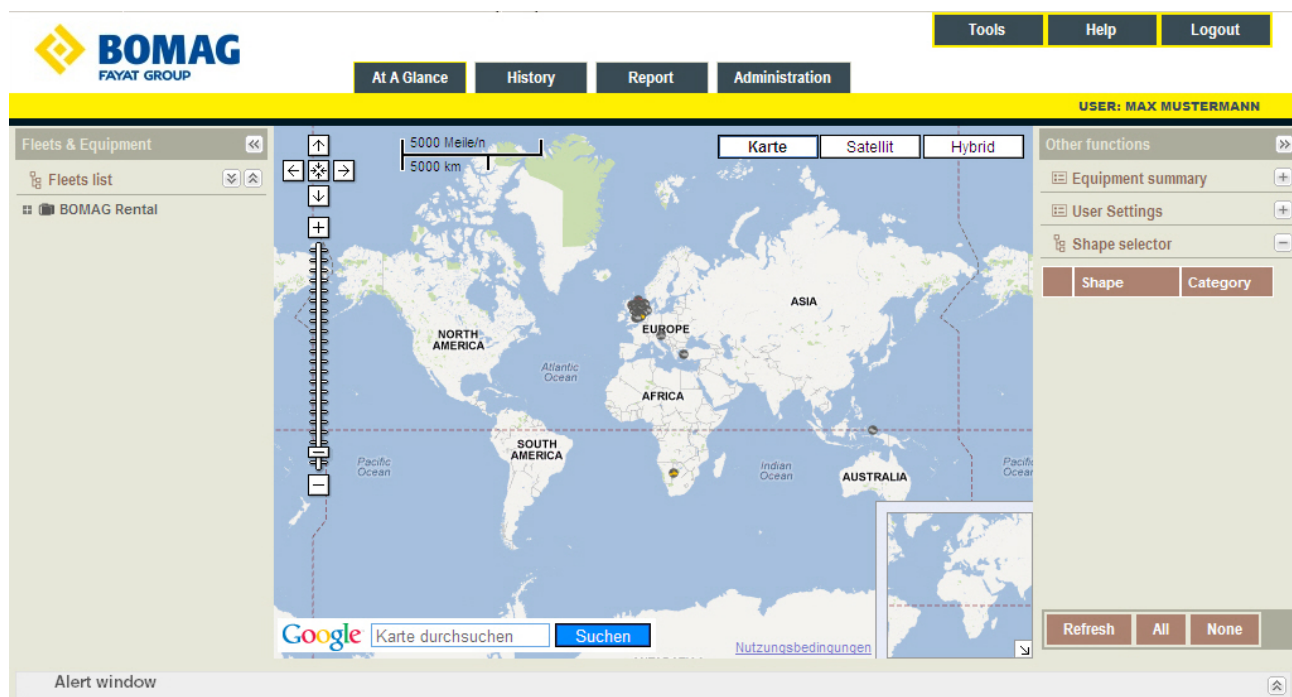


How to logout



- Click on the "Logout" button in the navigation.


General

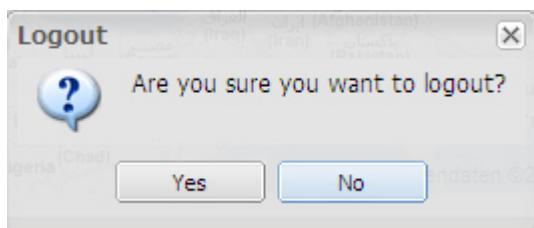


- Confirm the "Logout" dialog with "Yes".

1.3 View & hide a panel


(e.g. “Fleets & Equipment”)

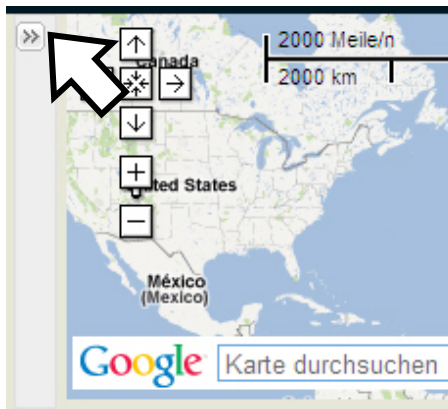

- Click on the “Maximize” button to open the panel.

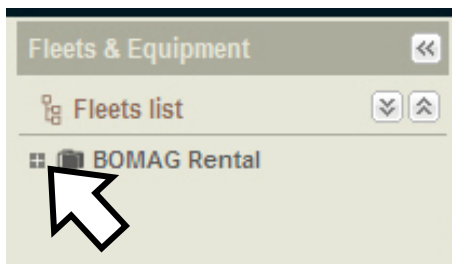


- Click on the “+” sign to show all machines of the fleet.

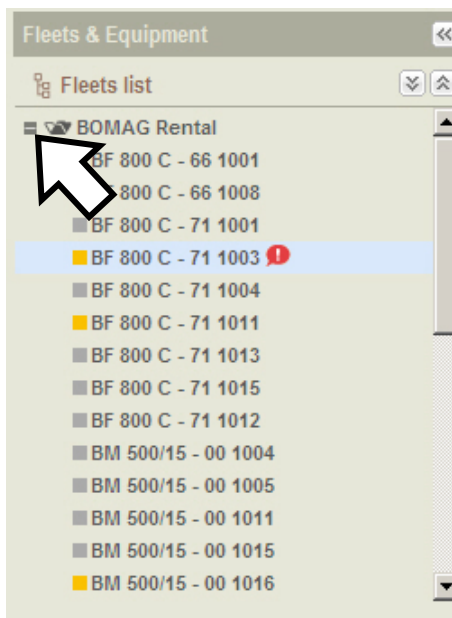

- Click on the “-” sign to hide the “Fleet list”.

General

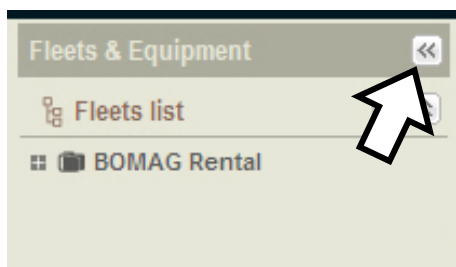

- Click on the “Minimize” button to hide the panel.

1.4 Alert window

The “Alert” window is located at the bottom of every screen. It comprises 3 tabs:

- “Alarms”
- “Messages”
- “Equipment”

BOMAG
FAYAT GROUP

Tools Help Logout

At A Glance History Report Administration

USER: MAX MUSTERMANN

Karte Satellit Hybrid

Alert window - Last unread alarms: 1

St...	Equipment	Text	Timestamp	Received Time
⚠	BF 800 C - 71 1003	PIIG response has been received.	06/26/2012 01:14:23 PM	06/26/2012 01:15:09 PM

Alarms

Lists the alarms received from all machines in the fleet during the last 7 days. The alarm list contains a maximum of the last 100 alarms received.

- Click into the “Alert” window bar to view alarms.
- In the “Fleet list” click with the right mouse button on the machine that generates the alarm to open a pull down menu and select “Mark as read”.
- When a user selects “Mark as read”, the alarm will not be visible for all users working in the same “Vista” (See “Vista” definition in the “Administration → Vistas” section).

Note

To view alarms older than 7 days, create an “Alarms report” (see chapter 4.2 - “Alarms” report).

1.5 Data selector

1.5.1 Date selector panel


The “Date selector” panel is used in history and report screens to select a date and time period.



The screenshot shows a web interface titled "Search parameters" with a sub-section "Date selector". It contains three rows of controls: "Quick:" with a dropdown menu showing "Last month"; "From:" with a date field showing "05/01/2009" and a time field showing "12:00:00 am"; and "To:" with a date field showing "05/31/2009" and a time field showing "11:59:59 pm". Each date and time field has a small calendar icon and a dropdown arrow.

- | | |
|--------|---|
| Quick: | Select a predefined time period |
| From: | Select a user defined start date and time |
| To: | Select a user defined end date and time |

Predefined time periods

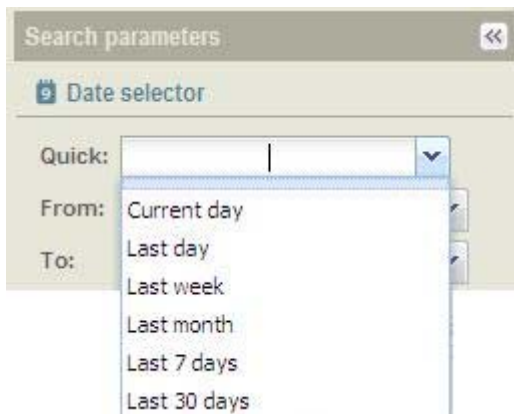

This screenshot shows the "Date selector" panel with the "Quick:" dropdown menu open. The menu lists several predefined time periods: "Current day", "Last day", "Last week", "Last month", "Last 7 days", and "Last 30 days". The "From:" and "To:" fields are visible but not the focus of this specific view.

1.5.2 Equipment / User selector panel

The “Equipment selector” panel is used in history and report screens to select a machine.

Search parameters

Date selector

Quick:

From: 05/01/2012 12:00:00 am

To: 05/31/2012 11:59:59 pm

Equipment selector

☐ BOMAG Rental

- ☐ BF 800 C - 66 1001
- ☐ BF 800 C - 66 1008
- ☐ BF 800 C - 71 1001
- ☒ BF 800 C - 71 1003
- ☐ BF 800 C - 71 1004
- ☐ BF 800 C - 71 1011
- ☐ BF 800 C - 71 1013
- ☐ BF 800 C - 71 1015
- ☐ BF 800 C - 71 1012

Create report All None

How to operate the “Equipment selector” panel


- Press the “+” sign to the left of the fleet name to show all machines in the fleet.
- To select all machines in the fleet, tag the check box to the left of the fleet name.
- To select individual machines, tag the check box to the left of each machine name.
- To select all machines in all fleets, click on the “All” button.

To deselect a machine from the “Equipment selector” list, untag the check box to the left of the machine or fleet name. To deselect all machines in all fleets, click with the left mouse button on “None”.

1.6 Table functions

1.6.1 Column header filters


A lot of tables in “Reports” / “Administration” and in the “Alert window” can be filtered by means of column filters.

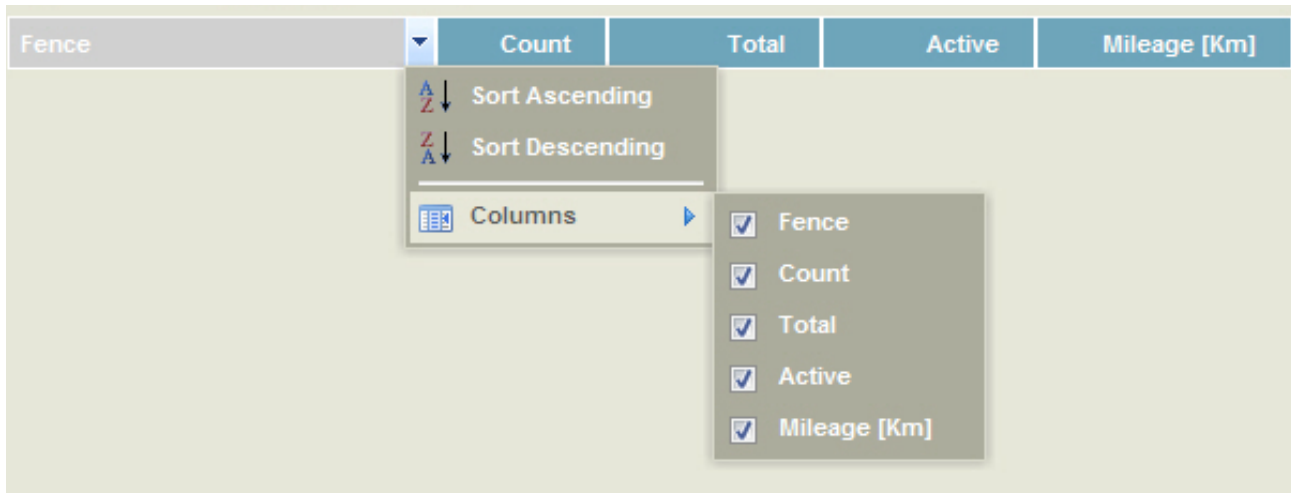

- Move the mouse over to the right of a column header (e.g. “Fence”).
- Click on the arrow for the drop down menu.
- Move the mouse over to “Columns”.
- To select additional columns, tag the corresponding check boxes.
- To deselect columns, untag the corresponding check boxes.
- To remove criteria selections, click with the left mouse button a second time in the check box to the left of the selection.
- Close the drop down menu.

1.6.2 Data sorting in tables

Tabular data in “Reports” / “Administration” and in the “Alert window” can be sorted in ascending or descending order.

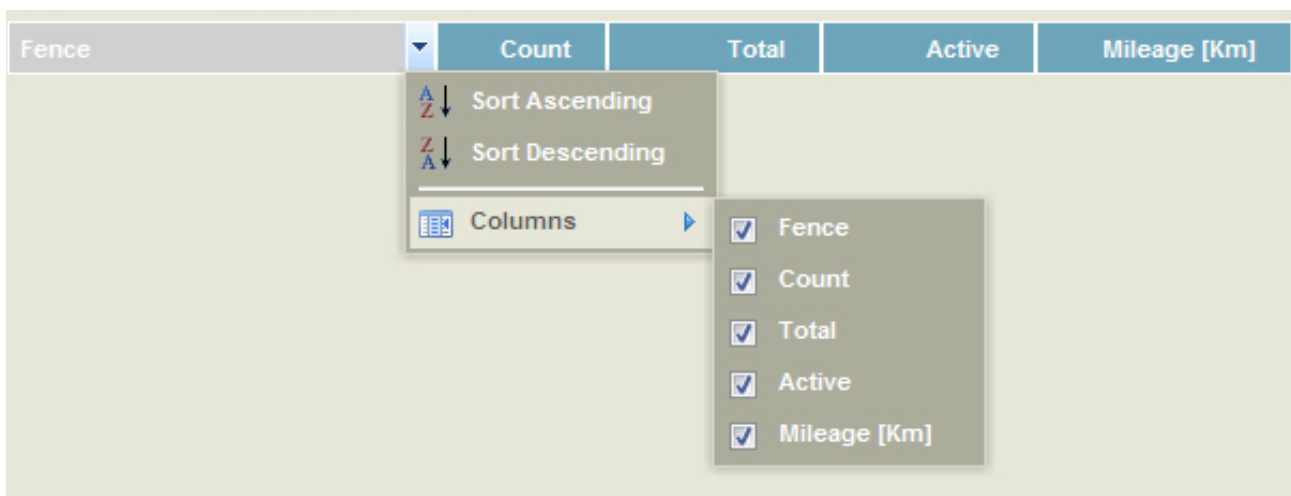


- Move the mouse over to the right of a column header (e.g. "Fence").
- Click on the arrow for the drop down menu.
- Select "Sort Ascending" or "Sort Descending".

2 At A Glance

2.1 Overview

① Note

If you do not see the machine/fleet you are looking for, contact your Administrator.

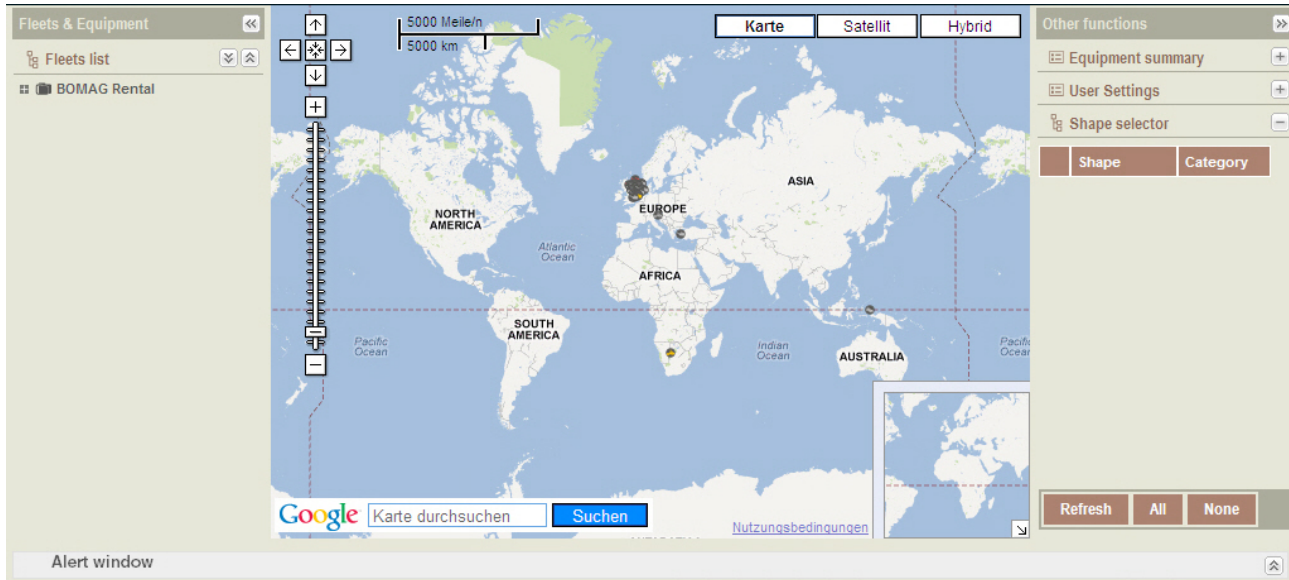

Fleet & Equipment
"Fleet list"

This is where your fleet(s) and machines are listed

Map

The map showing the exact location of your machine(s).


Other functions

Equipment summary: Summarizes how many machines are in various states of operation (e.g., 3 machines = Off, 6 machines = On/Idling, 12 machines = Moving/Working, etc.).

User settings: Saves and loads your default map.

Shape selector: Lists all shapes belonging to the user company. (See Administration → Shape or Administration → GeoFencing for further information.).

2.2 Select, center & follow or cancel following a machine

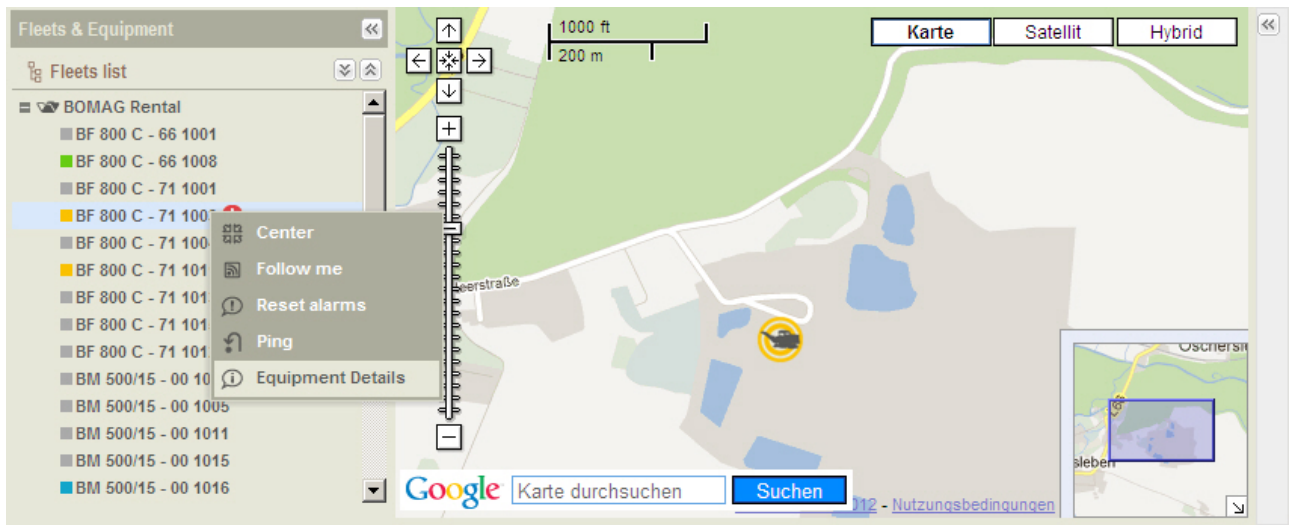

To select a machine

- Double-click with the left mouse button on the machine in the “Fleet list”.
- A machine icon will appear on the map to the right of the “Fleet list” section.

To center a machine

- Click with the right mouse button on the machine name in the “Fleet list”.
- Select “Center” from the pull down menu.

If no position has been sent from the machine, the application will show an “Invalid position” message.

To follow a machine

- Right click on the machine name.
- Select “Follow me” from the pull down menu.



On the map, a box will be placed around the selected machine.


- Click with the right mouse button on the machine name again.
- Select “Cancel follow” from the pull down menu.



The “Follow me” box around the machine immediately disappears from the map.

2.3 Alarms

Alarm & Message Icons

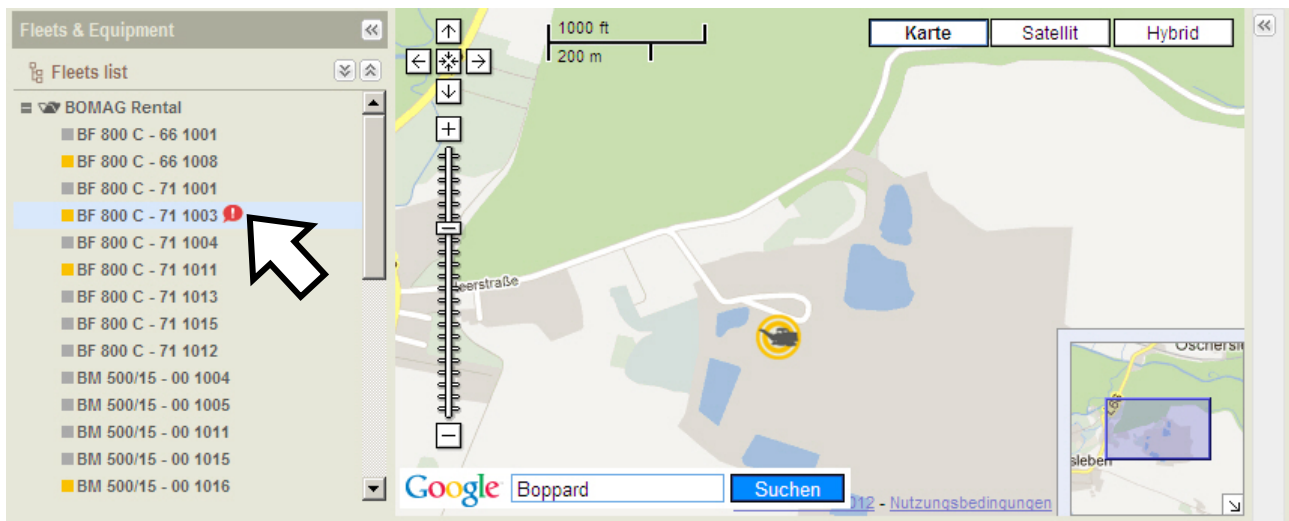

If a machine has received an alarm or message, the “not read” icon appears next to the machine name in the fleet list. The type of alarm and all other information concerning the alarms are shown in chapter 4.2 - “Alarms” report.

How to reset alarms

This function marks all alarms from the machine and alert window as read.

- Click with the right mouse button on the machine name.
- Select “Reset alarms” from the pull down menu.

2.4 Ping

Ping¹ is based on SMS² service and works only when the device on the machine is in ON or Standby mode. If the device is in Sleep mode or OFF (Hibernate), then the SMS (Ping) will be stored for a maximum of four (4) days and will be forwarded the next time the device is turned ON. When the machine is ON, the SMS response is delivered within 1-2 minutes by your carrier. The Ping will be referenced on the “At A Glance” and “History” screens. (For “Device” mode definitions, scroll down to the “Machine details” section).

How to ping a machine

This function allows the user to establish a GPS contact to a machine in the fleet. With the click of a button, you communicate with the onboard GPS device to retrieve the current location, heading, speed, etc.

Note

The number of Pings available is limited; please, refer to the BOMAG After Sales contact for further information on this subject.

The application does not permit sending more than one Ping request every 5 minutes.




- Click with the right mouse button on the machine you wish to ping (locate).
- Click with the left mouse button on “Ping” in the drop down menu.

¹ Ping: The term ping refers to a manual request of updated information of a machine. The ping allows the User to receive the information in addition to the normal update intervals.


² SMS: Stands for short message service (aka text messaging) and is available through your wireless carrier. It is simply a method of communication that sends text between cell phones, or from a PC or handheld to a cell phone. The “short” part refers to the maximum size of the text messages: 160 characters (letters, numbers or symbols in the Latin alphabet). For other alphabets, such as Chinese, the maximum SMS size is 70 characters. But the 160-character limit is not absolute.

At A Glance

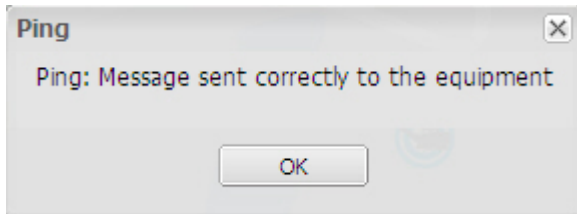

- Left mouse click on "OK".

To view a Ping on the "At A Glance" screen

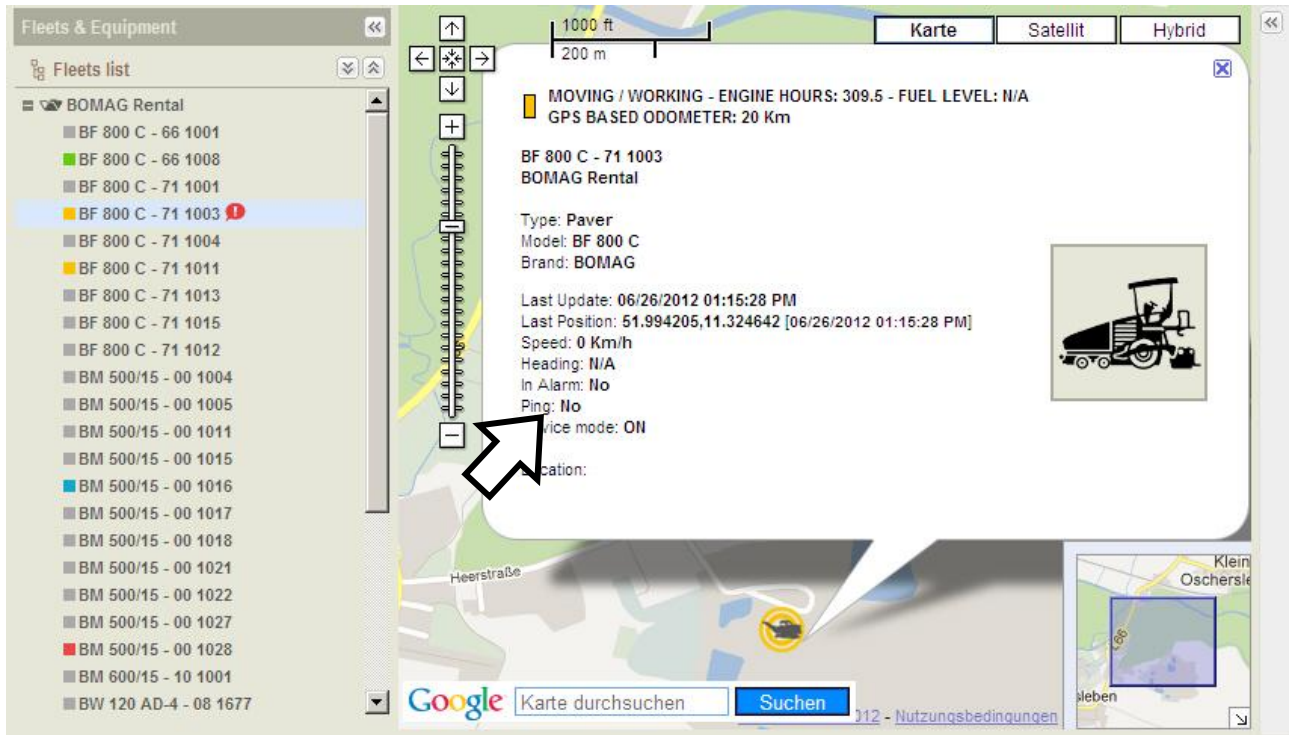


- Double click on the machine name.

The machine appears on the map to the right of the "Fleet list".

- Click with the left mouse button on the machine shown in the map.

A box with machine details appears (e.g. "Ping").

To view a Ping in the “History” screen

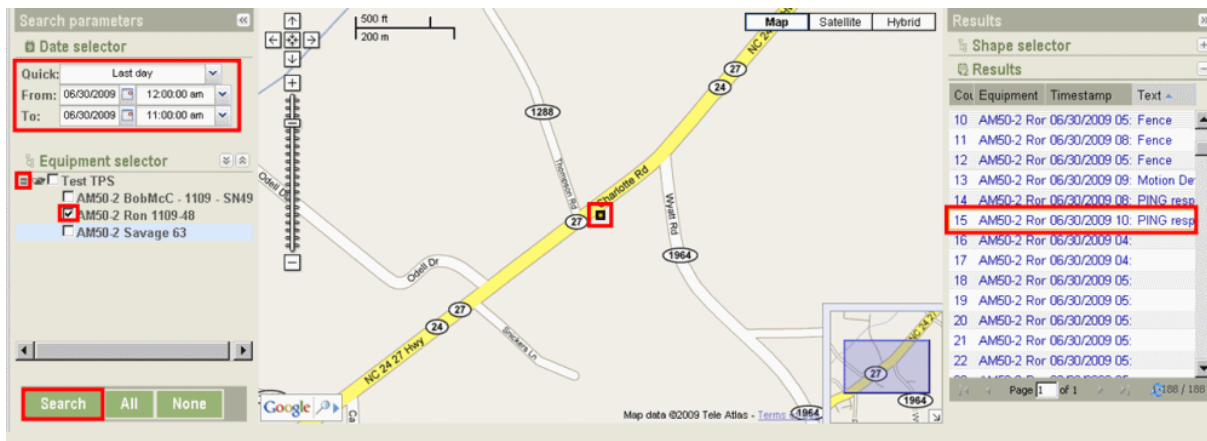

- Select the date and time period from the “Date selector” panel.
- Select a machine from the “Equipment selector” panel.
- Select the desired machine by tagging the check box to the left of the machine name.
- Click on the “Search” button. The machine appears in the map and in the “Results” panel on the right.

Note


To deselect a machine from the “Equipment selector” list, untag the check box to the left of the machine or fleet name or click on the “None” button.

- Scroll through the “Results” panel, until “PING” appears in the “Text” column.
- OR filter the “Results” panel:
- Move the mouse over the column header, e.g., “Text”.
 - Click on the arrow for the drop down menu.
 - In the drop down menu click with the left mouse button on “Sort Ascending” or “Sort Descending”.
 - Click the desired “PING”. The machine appears in the map.


2.5 Machine details

This function shows details concerning equipment, firmware and location for each machine in your fleet(s).

To view details about equipment and firmware on a machine

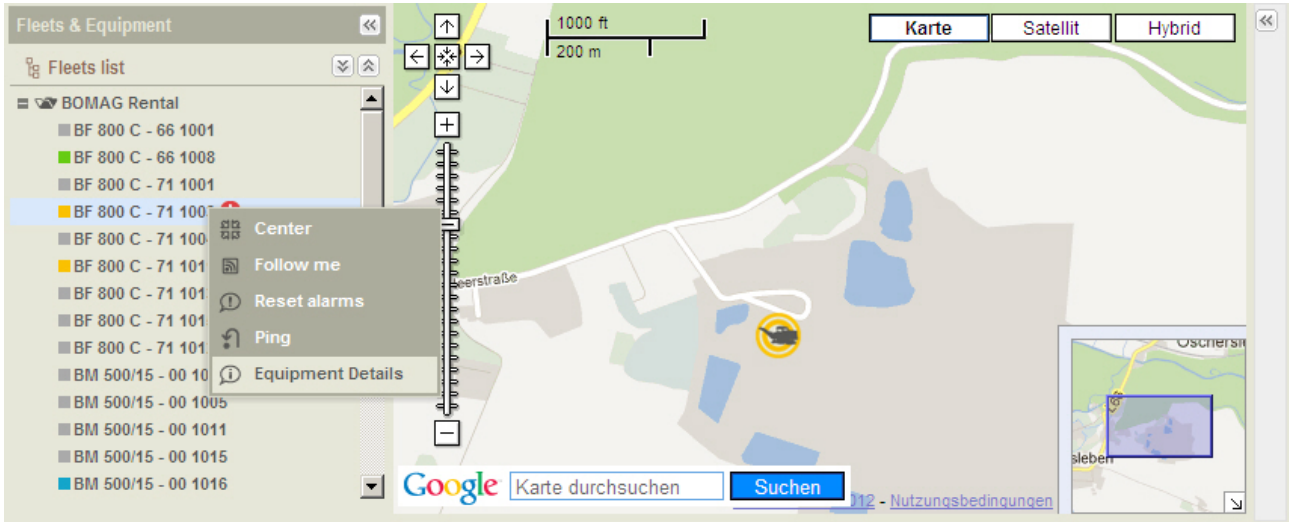

- Click with the right mouse button on the machine name.
- Select “Equipment details” from the drop down menu.

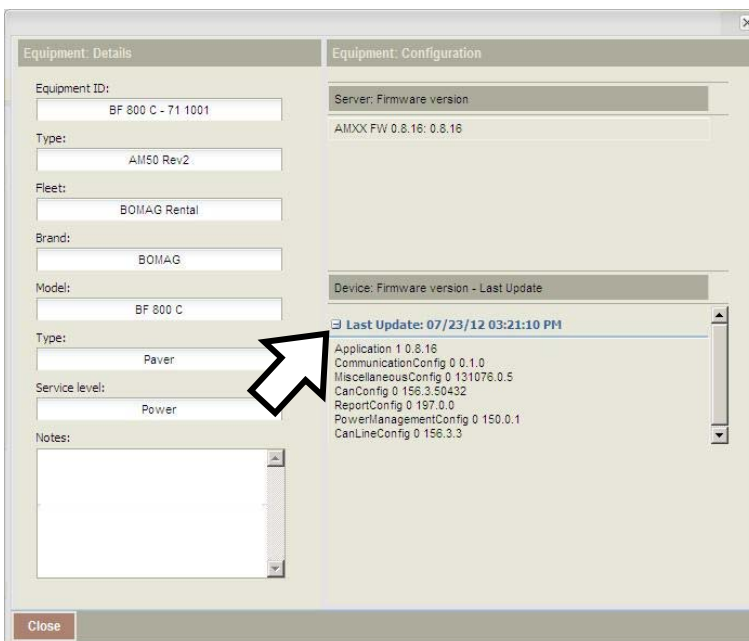

- To view “Device: Firmware version – Last update” details, click with the left mouse button on the “+” sign.
- To exit, click on “Close” or the “X”-button.

To view machine location details

✕

MOVING / WORKING - ENGINE HOURS: 309.5 - FUEL LEVEL: N/A

GPS BASED ODOMETER: 20 Km

BF 800 C - 71 1003

BOMAG Rental

Type: Paver

Model: BF 800 C

Brand: BOMAG

Last Update: 06/26/2012 01:15:28 PM

Last Position: 51.994205,11.324642 [06/26/2012 01:15:28 PM]

Speed: 0 Km/h

Heading: N/A

In Alarm: No

Ping: No

Device mode: ON

Location:



- Click with the left mouse button on the icon of a machine displayed in the map, a balloon shape will show the information

Machine information

- Type and serial number of the device installed on the machine
- Fleet name
- Machine type
- Model
- Brand
- Date and time of last update
- Latitude, longitude and heading of last updated position
- Speed
- Heading (if machine is not moving heading: will show "NA")
- In alarm
- Ping
- Device mode (see definition below)
- Location


Device mode

On	Mode immediately after the ignition of the device is switched on and when the device is properly working. (After the ignition has been switched on, the device will download the firmware and any available updates.)
Standby	Mode immediately after the ignition has been switched off. In this mode the device draws current from the battery of the machine (if connected) or from the internal battery of the device. It is able to respond to Ping requests, send motion detection alarms (if enabled in "Administration->Power Management", "Motion detection" mode and "Sensitivity" settings), and will send wake-up information with each wake-up interval ("Administration->Power Management, Wakeup interval"). The device remains in

At A Glance


standby mode for a set period of time, as defined by the administrator in "Administration"-> "Power Management", "Standby interval".

Sleep mode	Occurs after the standby interval period has elapsed. The device minimizes current consumption, stops using the machine's battery and starts using the device's internal battery. In this mode the device can wakeup just to send a wakeup information message or a motion detected message, as set in "Administration"->"Power Management", "Motion detection" mode and "Sensitivity". The minimum amount of time that the sleep interval can be set for is 24 hours.
Hibernate	The device is completely isolated from the power supply.

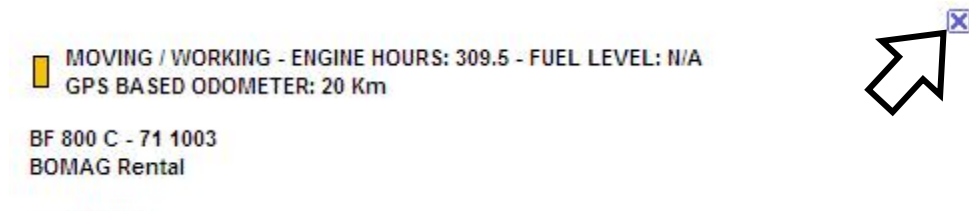

- To exit "Machine details", click with the left mouse button on the "Close" button.

2.6 Equipment summary

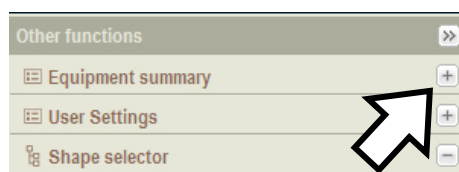

Click on the “+” sign to view the status of all machines in the “Equipment summary” section.



Each status is represented by a color. The number to the right of the status color indicates how many machines currently have this status and informs about the “TOTAL EQUIPMENT” in the fleet.

Status definitions

Grey	OFF	any position sent from the device when the machine is OFF (i.e. motion detection)
Blue	ON / Idle	Machine ON, but in idle state, depending on the “Idle time threshold” as defined by the status profile used
Red	Long Idle	Machine ON, but exceeding the “Idle time threshold” as defined in the status profile used
Yellow	Moving / Working	Machine ON, but between “threshold A” and “threshold B” as defined in the status profile (bases on CAN)
Green	High workload	Machine ON, but exceeding "threshold B" as defined in the status profile (based on CAN)

Note

High workload is only available on machines equipped with CAN bus, after the status profile has been set to “Based on CAN” (only available with BOMAG TELEMATIC POWER).

- Click on the “-” sign to exit “Equipment summary”.

2.7 User Settings


You may save a default map of your choice, which will then be loaded whenever you access the TELEMATIC application.



- Click on the word “User settings” or the “+” sign.
- To exit “User settings” click with the left mouse button on the “-” sign.

Find your location in the map

Option 1

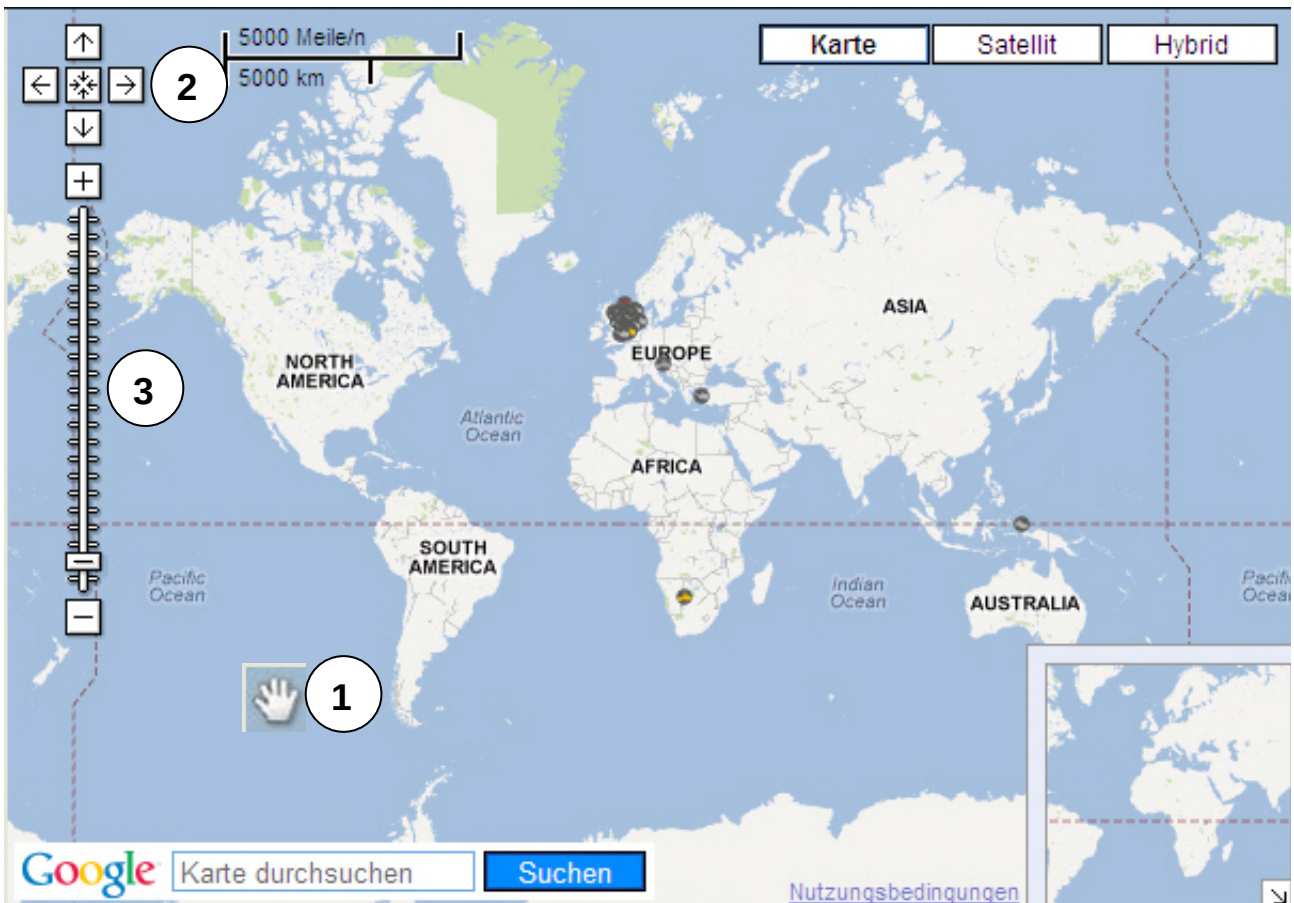

- When moving the mouse across the map, the mouse pointer changes to a hand (1).
- Point the hand at a continent, country, state or city and double click with the left mouse button.
- To find the exact area, repeat the double click with the left mouse button until you see the area you would like to save as your “Default map”.


OR use the pan arrows, mouse wheel, keys and/or the zoom bar:

- Pan left, right, up or down by clicking on the pan arrows (2) with the left mouse button.
- Zoom up, down, in, or out by clicking on the Zoom bar (3) with the left mouse button.


Option 2



- In the “Search the map” field of the “Google® Map Search” tool, enter the location. Most popular search choices are:
 - o Name of state, province or country
 - o Name of city
 - o Names of city and state, city and province or city and country
- Press the “Search” button.

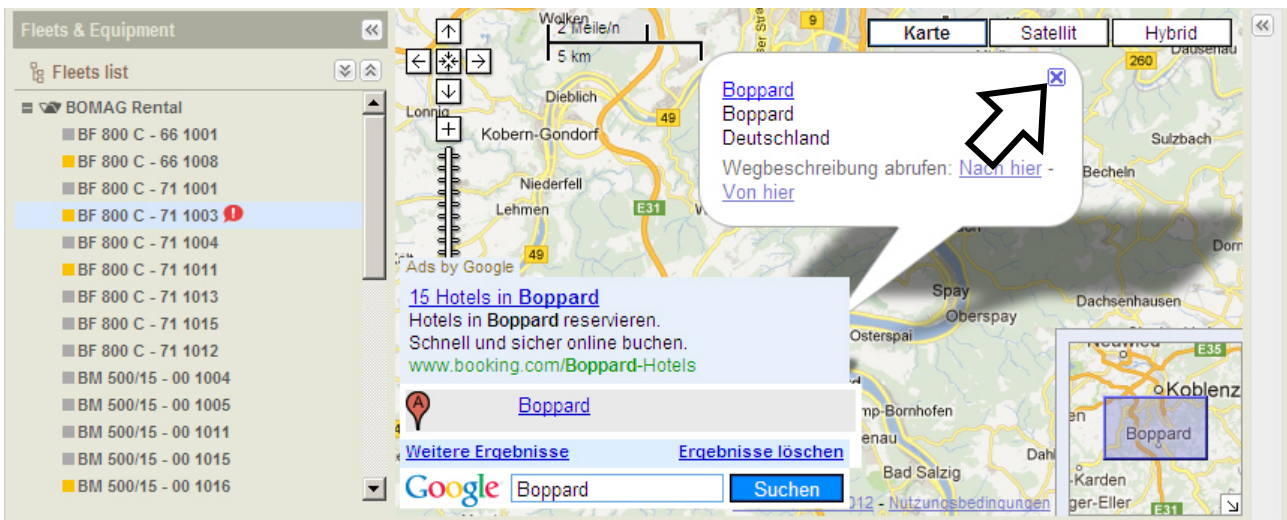


- When the “Get directions” pop-up screen appears click on the “Exit” button to close it.



- Remove the location icon by pressing the “Clear results” button in the “Google® Map Search” tool.
- If you need a more exact location, follow the instructions described in option 1.

Saving and loading a default map

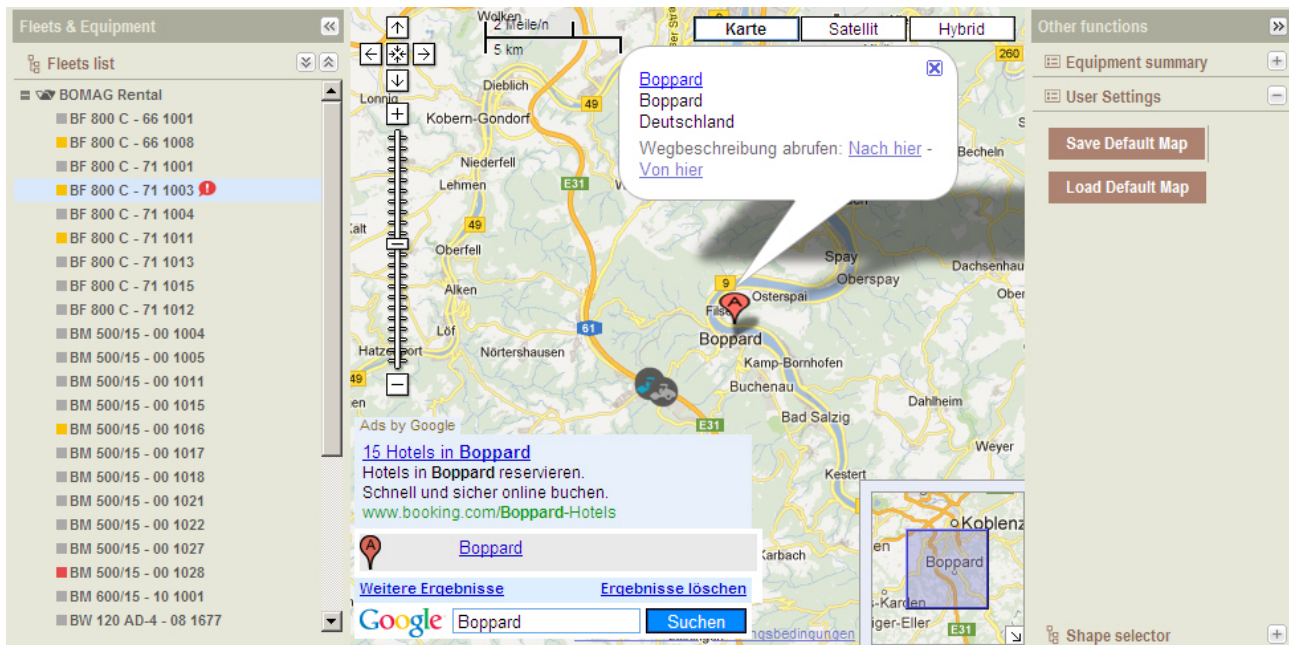

- Click on the “Save default map” button at the right under “User Settings”.
- Click on the “Load default map” button at the right under “User Settings”.


2.8 Show, hide & filter shapes

Depending on your access rights you can show and hide shape files linked with your “Vista” (see how to create and manage a “Vista” in “Administration→Vistas” and/or see how to create and manage “Shapes” in “Administration→Shape”).

Show & hide shapes

- Open the “Shape selector” by clicking on the “+”- sign.

You will see the list of shapes available in your “Vista”.

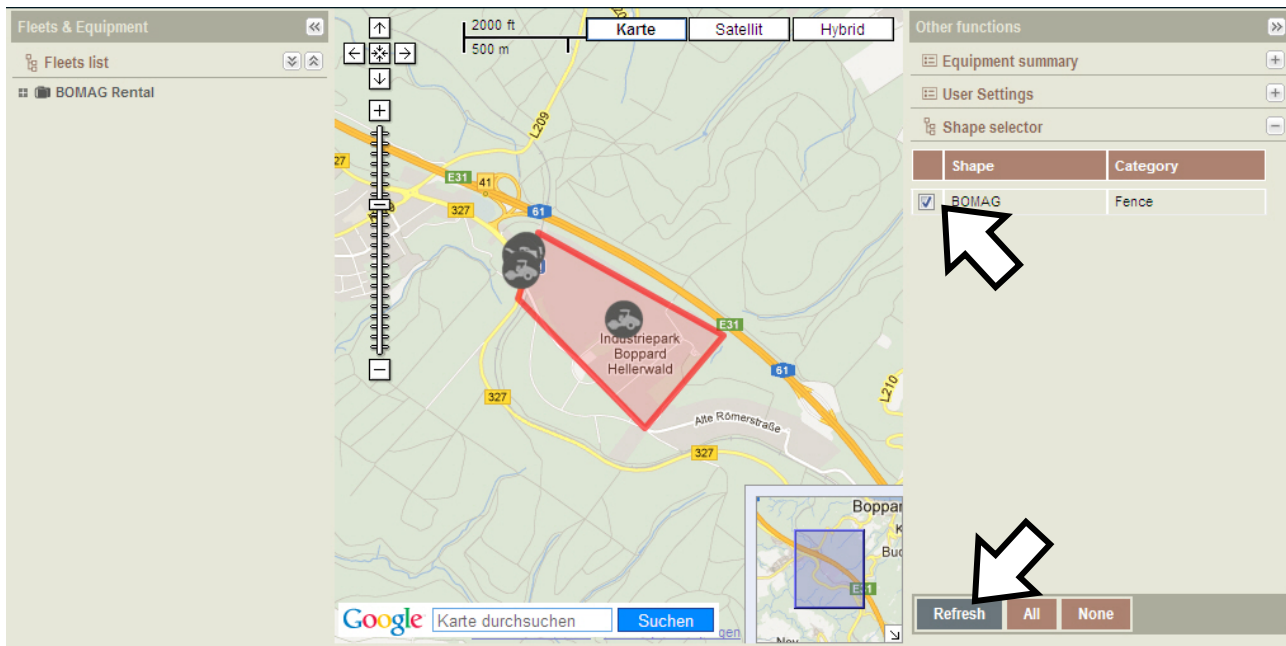

- To select/deselect one or more shapes from the list, tag the check box to the left of the shape name.
- Press the “Refresh” button.


The map will immediately be updated with the shapes you selected/deselected.

- For quick selection/deselection, press the “All” button to see all shapes or press the “None” button to deselect all shapes.

Filter shapes

The “Shapes selector” may be filtered.

At A Glance

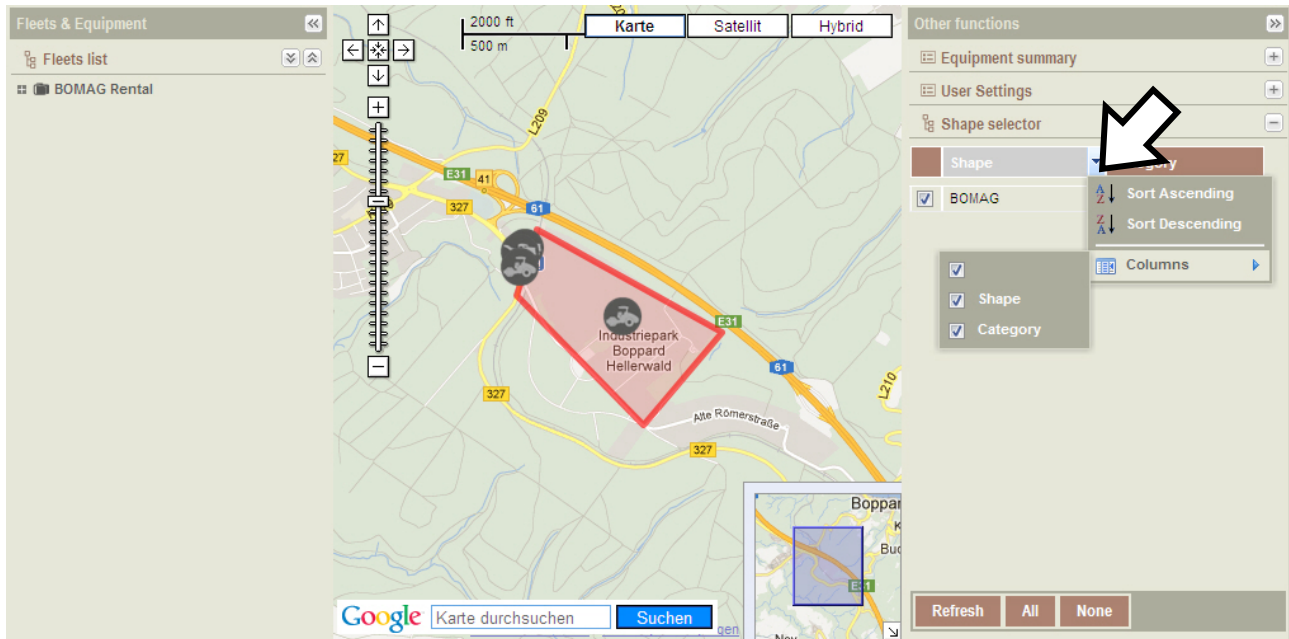

- Move the mouse pointer over to one of the column headings, then click the down arrow.
- Click with the left mouse button on “Columns”.
- Select the columns you wish to view by tagging or untagging the corresponding check box.


View a “GeoFence”

Note

The device can manage up to 10 “GeoFences”.

Each “GeoFence” behaves in accordance with each fence setting as defined by the Administrator in “Administration → GeoFencing → Create, Edit, Delete”.

Fence breaks work when machines cross over the fence and alarms are only sent if the fence is set with a priority other than null.

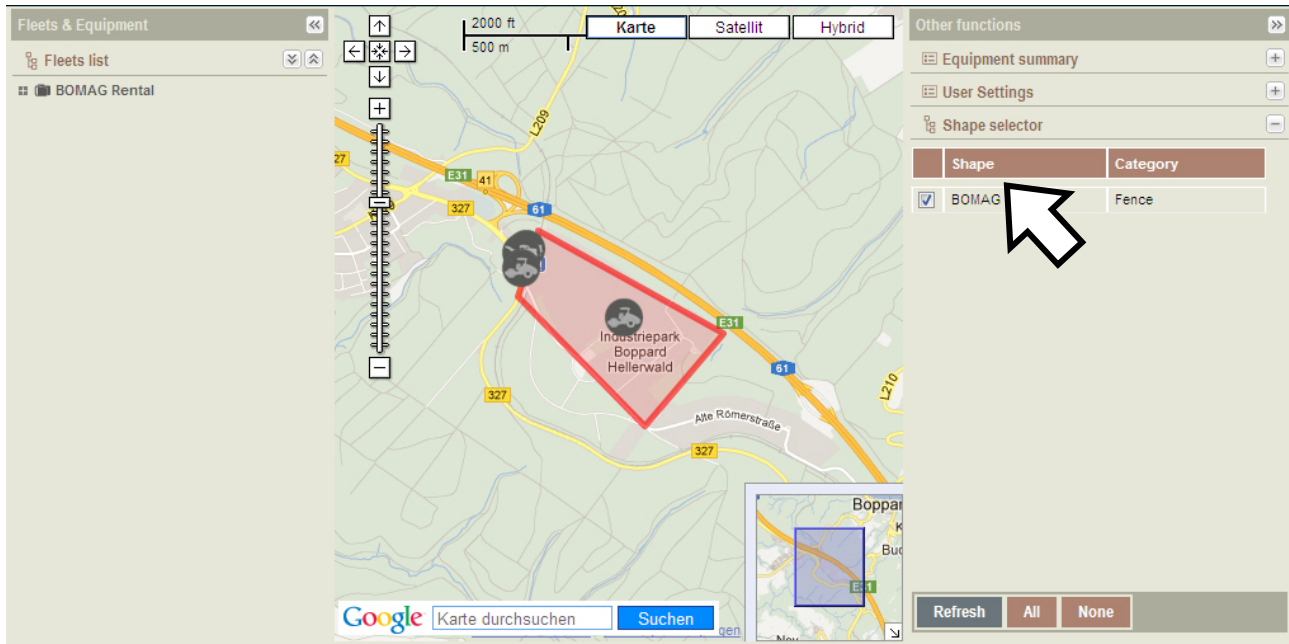


- Double click on a shape in the shape list.
A shape will appear on the map.

3 History

3.1 Overview

The “History” screen is divided into 3 panels:

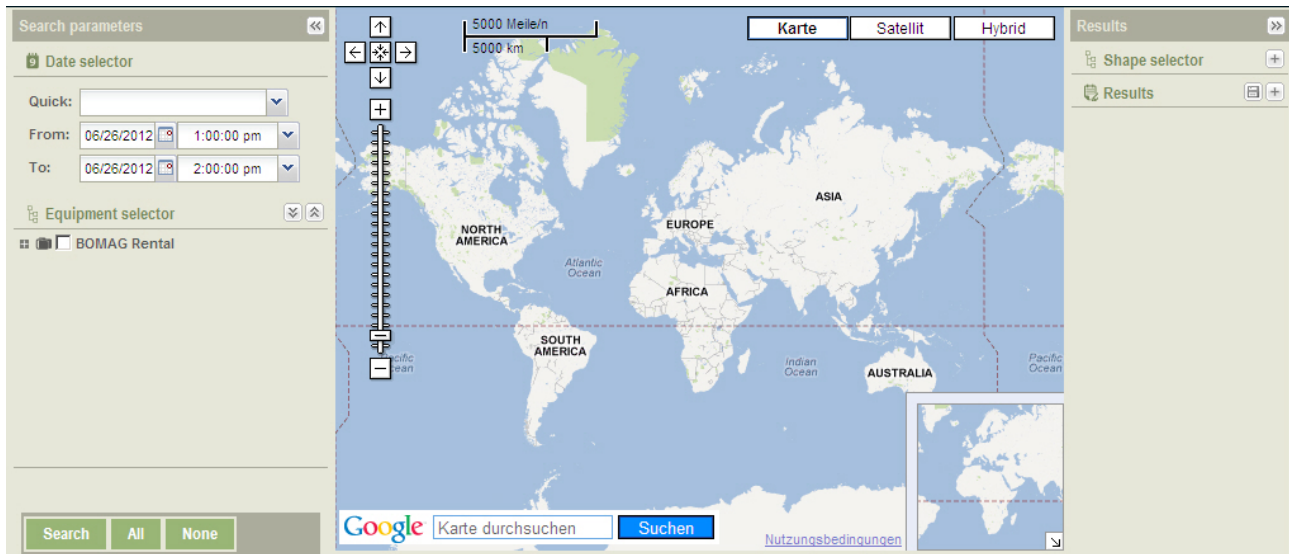

Search parameters

Date selector, equipment selector

Map

The map showing the location and activity of your machines

Results

The shape selector lists all of the job site shapes and fences. (See “Administration → Shape or Administration → GeoFencing” for further information.)

Results lists all the machine positions based on your search criteria.

3.2 How to show a track (Breadcrumb trail)

The screenshot displays the BOMAG Telematic web application interface. On the left, the 'Search parameters' panel includes a 'Date selector' with a 'Quick:' dropdown set to 'Last month', and 'From' and 'To' date/time pickers. Below this is the 'Equipment selector' with a list of equipment IDs, where 'BW 213 DH-4 - 06 1086' is selected. A white arrow points to the 'Search' button. The central map shows a breadcrumb trail of colored squares (yellow, green, red) representing the machine's path. On the right, the 'Results' panel shows a table of search results. The first result is highlighted, showing details for the selected equipment.

Equipment	Timestamp	Speed	Details
BW 213 DH-4 - 06 10...	05/01/20...	0	Wake
BW 213 DH-4 - 06 10...	05/01/20...	0	Sleep
BW 213 DH-4 - 06 10...	05/02/20...	N/A	Report IO
BW 213 DH-4 - 06 10...	05/02/20...	N/A	Engine ON
BW 213 DH-4 - 06 10...	05/02/20...	0	ON Message
BW 213 DH-4 - 06 10...	05/02/20...	0	Scheduled positi...
BW 213 DH-4 - 06 10...	05/02/20...	0	CAN
BW 213 DH-4 - 06 10...	05/02/20...	0	Scheduled positi...

Details: Wake
 Location: 51.1076583 , 6.446402 [05/01/2012 04:04:29 PM]
 Equipment Status: OFF
 Equipment ID: BW 213 DH-4 - 06 1086
 Timestamp: 05/01/2012 04:04:29 PM
 Speed: 0
 GPS Fix: 3D
 GPS Based Odometer [Km]: 1067

- Select date and time period from the “Date selector”.
- Select the machine from the “Equipment selector”.
- Click the “Search” button.

The result is a path listed in the “Results” panel on the right side of the screen AND shown on the map with a sequence of little color coded squares; color coded squares represent the status the machine is in or was in at any given time, while switched ON (during the specified time period).

Note

If no data is available for the query, a “No data with current parameters” message will be displayed.


The query can generate a large amount of data. This data will be listed on multiple pages in the “Results” panel. To view all history in the map for the entire selected date/time period, you must scroll through the pages.

By selecting a position in the “Results” panel, the corresponding position on the map appears as a bold printed, color coded square.

If an alarm has been received for a specific position in the path, the corresponding field “Description” (in the “Result” panel) shows the reason for the alarm.

3.3 History export

As soon as the result of a history search is available, the web page provides the possibility to export the positions list.

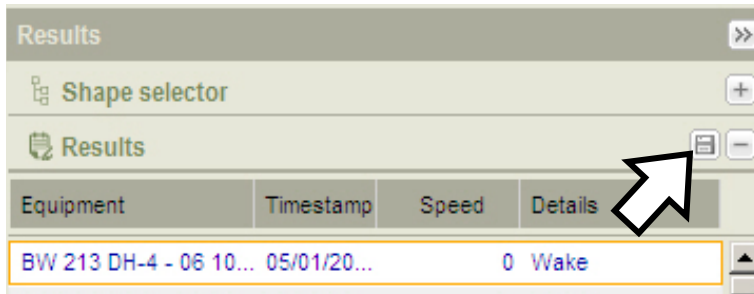

- Click on the “Export” button to export a file.

The exported file is a text file with the following parameter:

- o Field separator: semicolon (“;”)
- o Replacement character (every semicolon in a field is separated by this character): “|”
- o Decimal separator: dot (“.”)
- o Thousands separator: comma (“,”)

4 Reports


4.1 Export reports

Reports can be exported either as “PDF” or “MS Excel”® files.

Export as PDF

① Note

You must have a PDF reader installed on your computer to be able to view this report.

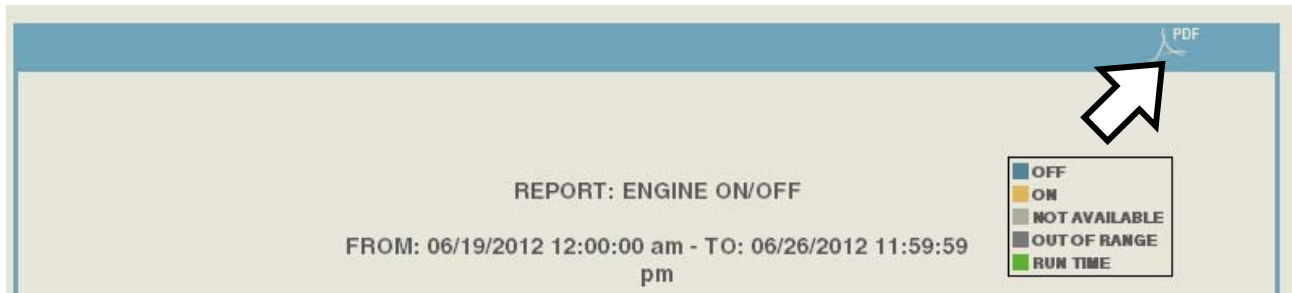

- Click on the “PDF” icon to export the report.

Export to MS Excel®

① Note

You must have MS Excel® installed on your computer to be able to export this report.



- Click on the “Export” icon to download.

4.2 “Alarms” report

Report Overview

The “Alarms report” shows the status of “All”, “Read” or “Unread” alarms received within a specified date and time period. See exemplary report below. To customize your reports please refer to the “How to filter a report” section.

The screenshot shows the 'Report: Alarms' interface. On the left, there are search parameters including a 'Date selector' with 'From' and 'To' date/time pickers, and an 'Equipment selector' with a list of BOMAG Rental equipment. The main area displays a table of alarm results. The table has columns: Status, Equipment, Text, Type, Timestamp, Received Time, and View on map. A single row is visible with a yellow warning icon in the Status column, equipment 'BF 800 C - 71 1003', and text 'PING response has been received.'.

Status	Equipment	Text	Type	Timestamp	Received Time	View on map
⚠	BF 800 C - 71 1003	PING response has been received.	PING	06/26/2012 01:14...	06/26/2012 01:15...	

Search parameters “Date selector”, “Equipment selector”

Report panel “Report results”, “Filter selection”

Report data

Status	“Read alarms”, “Unread alarms”
Equipment	Machine designation
Text	Text sent about alarm
Type	Type of alarm sent
Received time	Timestamp of when the alarm was received
View on map	View machine(s) in alarm on “Google® Maps”

How to change the alarm status from “Unread” to “Read”

- Click with the right mouse button on the “Unread” icon in the “Status” column and select “Mark as read”. The “Unread” icon will change to the “Mark as read” icon.

Reports

How to filter a report

Report: Alarms

Read state:

- All
- Unread
- Read

Type:

- All
- Not Set
- Fence
- CAN
- PING
- Equipment not reporting
- Curfew
- Input
- Motion Detection
- SMS delivery error
- Maintenance

- Open the drop down menu of the “Read state” filter.
- Select “All”, “Unread” or “Read”.

Your selection will turn light blue and appear in the filter field.

- Open the drop down menu of the “Type” filter.
- Select “All” OR select each individual filter criterion required.

Your selection(s) will turn light blue and appear in the filter field.

- To deselect one or more of the selected criteria, click with the left mouse button a second time to deselect your selection.

Report: Alarms

Read state:

Type:

- To deselect all criteria at once, click with the left mouse button on the “X”.
- Close the drop down menu.

How to view machines in alarm status in the map

Report: Alarms

Read state: Type: Select All / None: ☐

Status	Equipment	Text	Type	Timestamp	Received Time	View on map
	BF 800 C - 71 1003	PING response has been received.	PING	06/26/2012 01:14...	06/26/2012 01...	☐

- For each machine you wish to see on the map tag the check box in the “View on map” column.
- Click on the “View on map” button.
- To deselect machines in alarm status on the map, untag the corresponding check box in the “View on map” column.

Report: Alarms

Read state: Type: ☐ Select All / None:

Status	Equipment	Text	Type	Timestamp	Received Time	View on map
	BF 800 C - 71 1003	PING response has been received.	PING	06/26/2012 01:14...	06/26/2012 01:15...	☐



- To view all machines in alarm status on the map tag the check box “Select All / None”.
- Click on the “View on map” button.
- To deselect all machines in alarm status, untag the “Select All / None” check box.

4.3 “Engine hours” report

Report Overview

The “Engine hours” report shows up-to-date total engine hours for all machines in your fleet(s). See exemplary report below. To customize your reports refer to the “How to Filter a Report” section.

Report: Engine hours - 32 Results							
Equipment	Brand	Model	Type	Engine hours	Received Time	Inactive Time	Action
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
BF 800 C - 66 1001	BOMAG	BF 800 C	Paver	331.2	06/21/12 08:17:56 AM	5 days 05:45:00	set engine hours
BF 800 C - 66 1008	BOMAG	BF 800 C	Paver	82.5	06/26/12 01:45:12 PM	00:00:00	set engine hours
BF 800 C - 71 1001	BOMAG	BF 800 C	Paver	531.4	06/11/12 12:00:17 PM	15 days 02:02:00	set engine hours
BF 800 C - 71 1003	BOMAG	BF 800 C	Paver	310.2	06/26/12 01:46:22 PM	00:00:00	set engine hours
BF 800 C - 71 1004	BOMAG	BF 800	Paver	252.8	06/26/12 02:12:11 AM	11:50:00	set engine hours
BF 800 C - 71 1011	BOMAG	BF 800 C	Paver	339.4	06/26/12 01:48:54 PM	00:00:00	set engine hours
BF 800 C - 71 1013	BOMAG	BF 800 P	Paver	94.4	06/26/12 01:37:49 PM	00:25:00	set engine hours
BF 800 C - 71 1015	BOMAG	BF 800 C	Paver	16.3	06/26/12 11:41:20 AM	1 day 02:21:00	set engine hours
BF 800 C - 71 1012	BOMAG	BF 800 P	Paver	21.3	05/08/12 01:37:46 PM	49 days 00:25:00	set engine hours
BM 500/15 - 00 1004	BOMAG	BM 500/15	Cold planner	267.5	06/22/12 10:28:40 AM	4 days 03:34:00	set engine hours
BM 500/15 - 00 1005	BOMAG	BM 500/15	Cold planner	497.3	06/26/12 11:50:12 AM	02:10:00	set engine hours
BM 500/15 - 00 1011	BOMAG	BM 500/15	Cold planner	151.7	06/26/12 11:24:54 AM	02:38:00	set engine hours
BM 500/15 - 00 1015	BOMAG	BM 500/15	Cold planner	222.4	06/25/12 08:33:30 PM	17:29:00	set engine hours
BM 500/15 - 00 1016	BOMAG	BM 500/15	Cold planner	174.7	06/26/12 01:44:11 PM	00:00:00	set engine hours
BM 500/15 - 00 1017	BOMAG	BM 500/15	Cold planner	220	06/20/12 04:26:45 PM	5 days 21:36:00	set engine hours

Report data

Engine hours	Total engine hours up to the last “Received time”
Received time	Last position timestamp received from the machines
Inactive time	Total time the machines were inactive (or in Off position) since the last “Received time”.
Action	Set current engine hours

How to filter a report

The “Engine hours” report can be filtered using filter fields in each column (e.g. “Brand”):



- Click the down arrow to the right of the “Brand” filter field.
- Select the “Brand” name(s) from the drop down menu by tagging the corresponding check box or click on the “All” button to select all “Brands”.
- To deselect a “Brand” name, untag the corresponding check box.
- Click on the “Apply” button.

Filtered results immediately appear in the “Brand” column.


- Repeat the above steps for each additional filter you wish to set.
- To deselect all brand names click on the “None” button.

- Click on the “Close” button.

4.4 “Engine ON/OFF” report

Report overview

For the date and time period selected, the “Engine ON/OFF” report shows in graphical form how long each selected machine was ON, OFF or NOT AVAILABLE.

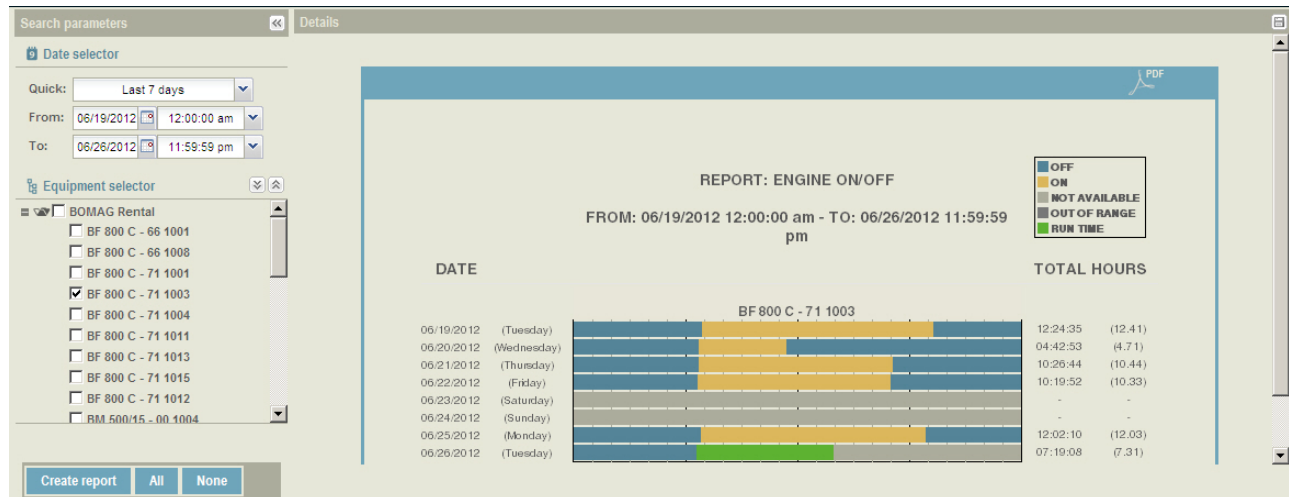

Search parameters “Date selector”, “Equipment selector”

Details Report results

Definitions

OFF Key in OFF position

ON Key in ON position

NOT AVAILABLE No data has been received over the chosen period

OUT OF RANGE

RUN TIME

How to run a report

- Select the “Date” and “Time” period from the “Date selector” panel.
- Select machine(s) from the “Equipment selector” panel.
- Press “Create report” to create the report.

If no data is available for the query, a “No data with current parameters” message will be displayed.

How to export a report to PDF

Note

You must have a PDF reader installed on your computer to be able to view this report.

- Click on the PDF icon to export the report.

4.5 “Maintenance” report


① Note

Please note that the system does not contain any BOMAG maintenance plans. To be able to use this feature you should create your own maintenance plans by referring to the maintenance instructions for your machine.

Report overview

The “Maintenance” report shows the maintenance status of every machine in your fleet in form of lines. To customize your reports refer to the section “How to filter a report”.

The “Maintenance” report screen is divided into 2 panels:

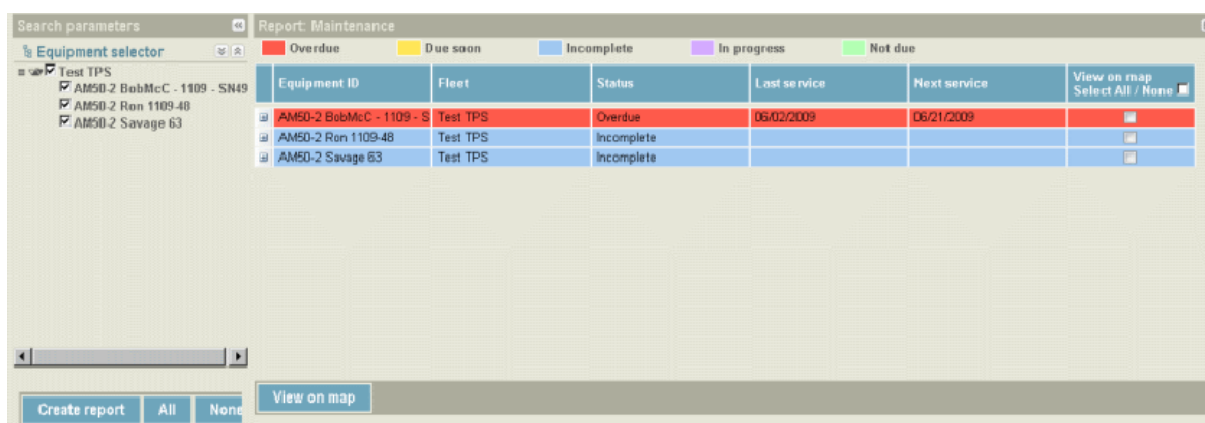

Search parameters Equipment selector


Report panel Report results

Maintenance status legend

Red	Overdue	The next machine maintenance is overdue.
Yellow	Due soon	The machine is soon due for the next maintenance.
Blue	Incomplete	Maintenance has not been defined because initial maintenance setting is missing from the “Administration → Maintenance → Create, Edit, Delete” section.
Purple	In progress	Machine is “In progress” (being serviced).
Green	Not due	Machine maintenance is up-to-date. Service “Not due” yet.

Reports

How to create a report

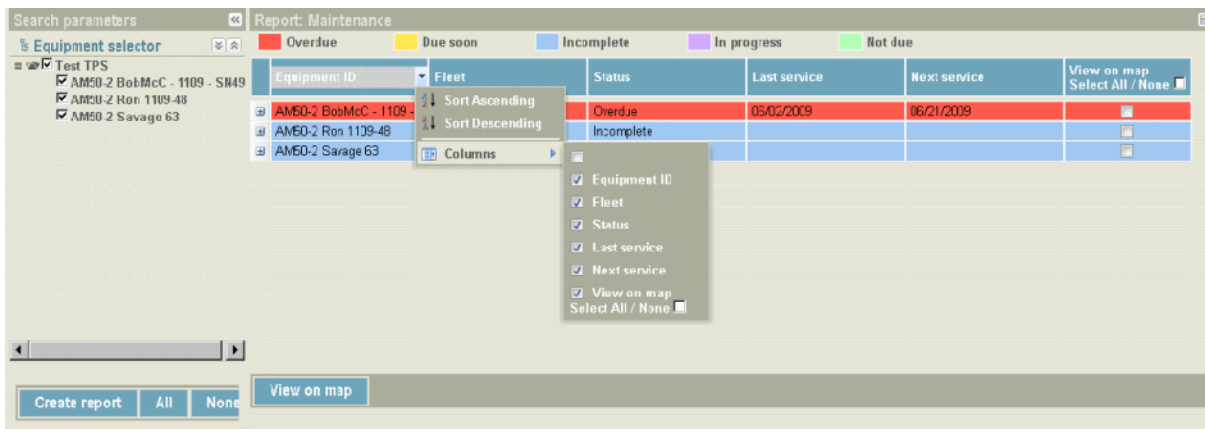


- Filter the report by using the column header filters.
- Select machine(s) from the “Equipment selector” panel.
- Press “Create report”.

How to update a maintenance status

This section shows you how to change the status of each machine for which maintenance is to be performed. Two status scenarios are shown below; “Overdue” and “Incomplete”.

Scenario “Overdue”

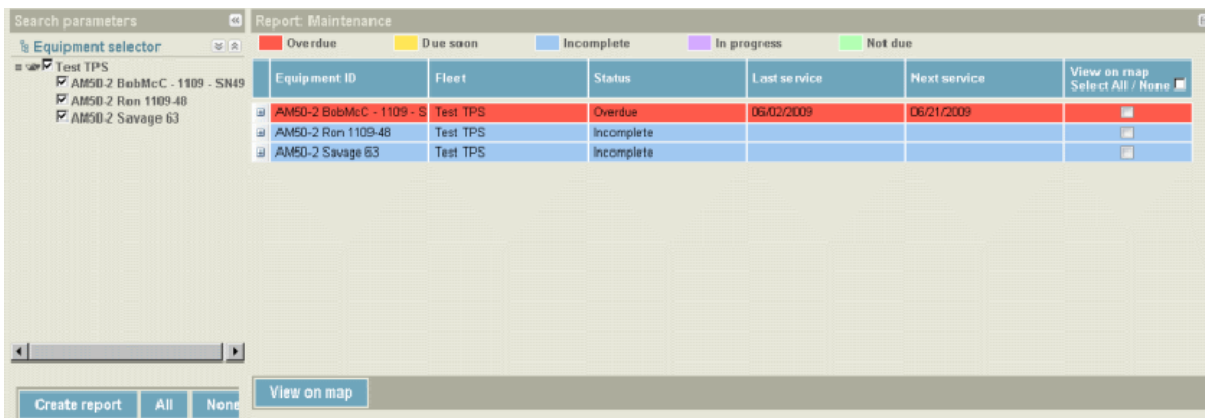

- Create a report.
- Click on the “+” sign to the left of the Equipment ID name (machine name).

Search parameters: Equipment selector

Report: Maintenance

Overdue Due soon Incomplete In progress Not due

Equipment ID	Fleet	Status	Last service	Next service	View on map Select All / None
AM50-2 BobMcC - 1109 - S	Test TPS	Overdue	06/02/2009	06/21/2009	

Type	Status	Last service	Next service	Option List
Timing Test hours	Overdue	06/02/2009	06/21/2009	Option List

New service

AM50-2 Ron 1109-48 Test TPS Incomplete

AM50-2 Savage 63 Test TPS Incomplete

Create report All None View on map

- Click on the “Options list” link and click on “New service”.

Search parameters: Equipment selector

Report: Maintenance

Overdue Due soon Incomplete In progress Not due

Equipment ID	Fleet	Status	Last service	Next service	View on map Select All / None
AM50-2 BobMcC - 1109 - S	Test TPS	In progress	06/02/2009	06/21/2009	

Type	Status	Interval	Measurement u	Threshold low	Threshold med	Last service	Next service	Option List
Timing Test hours	In progress	3	Engine Hours	56	8	06/02/2009	8 engine hours lie at 06/21/2009 prc	Option List

AM50-2 Ron 1109-48 Test TPS Incomplete

AM50-2 Savage 63 Test TPS Incomplete

Create report All None View on map

The status will immediately change to “In progress” (purple).

- Once the service has been completed, click on the “Options link” and click on “Close service”.

Search parameters: Equipment selector

Report: Maintenance

Overdue Due soon Incomplete In progress Not due

Equipment ID	Fleet	Status	Last service	Next service	View on map Select All / None
AM50-2 BobMcC - 1109 - S	Test TPS	In progress	06/02/2009	06/21/2009	

Type	Status	Interval	Measurement u	Threshold low	Threshold med	Last service	Next service	Option List
Timing Test hours	In progress	3	Engine Hours	56	8	06/02/2009	8 engine hours lie at 06/21/2009 prc	Option List

AM50-2 Ron 1109-48 Test TPS Incomplete

AM50-2 Savage 63 Test TPS Incomplete

Create report All None View on map

Close service date: 07/13/2009

Engine hours: 20.1 Cost (\$): 0

Notes:

Ok Cancel


A window opens and displays a form to be completed.

- Enter the required data into the window:
 - Close service date: The system shows today's date as default date to close the maintenance, but the user can change this date to the actual date of service.


Reports

- o Engine hours: The system shows the actual engine hours at the end of maintenance, but the user can update these to the actual hour meter reading at the time of service. This meter reading will reset the clock for the next service due.
 - o Cost: Enter the total cost of service. (Example in numeric format: 70.50.).
 - o Notes: Notes that have been entered by the user at the start or end of service will be stored in the database.
 - Press the “Ok” button.
 - Confirm that the “Save” process has been completed by clicking on the “Ok” button.
- The status will immediately change to “Not due” (green).

To enter initial maintenance information for machines with “Not defined” status:

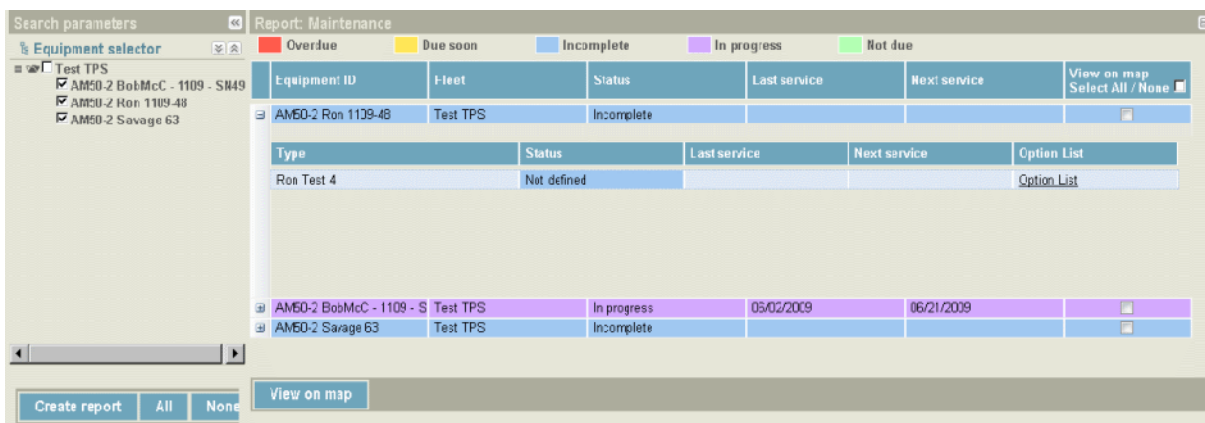


- Create a report.
- Click on the “+” sign to the left of the “Equipment ID” (machine name).
- Click with the left mouse button on the “Options list” link and click on “New service”.
- Enter all required information.
- Press the “Ok” button.
- Confirm “Save to database” by pressing the “OK” button.

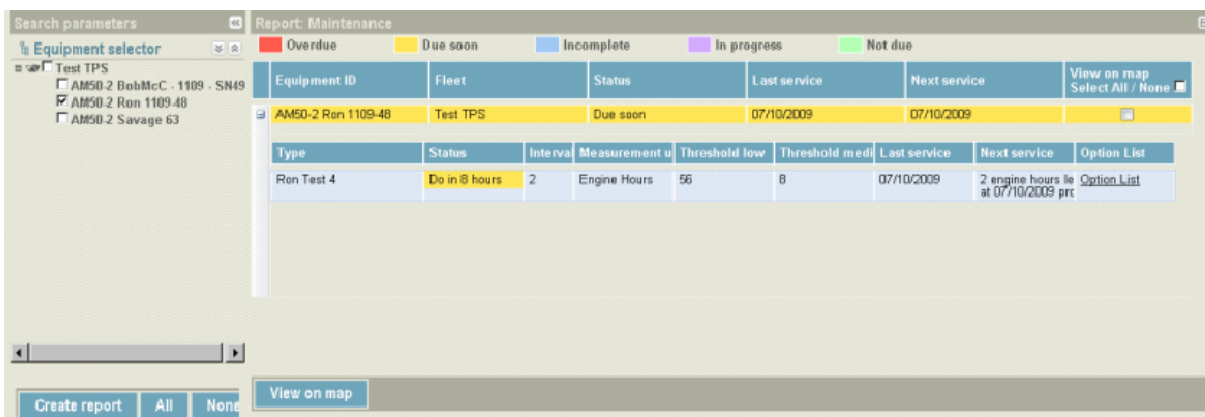


Note that the machine status has immediately changed to “Due soon” (yellow).

- To activate the start of service, click with the left mouse button on the “Options link” and click on “Active service”.

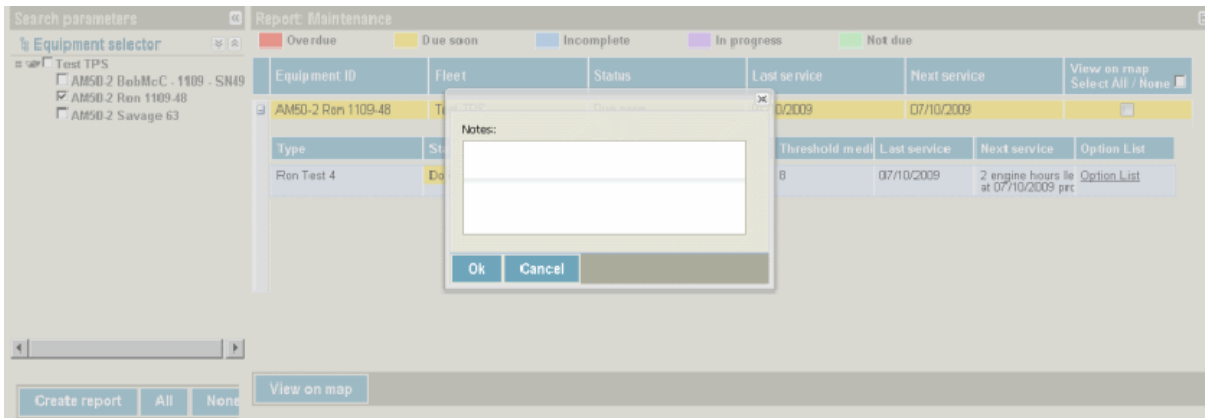


- Enter any notes you wish to add and press the “OK” button. Note that the machine status has immediately changed to “In progress” (purple).

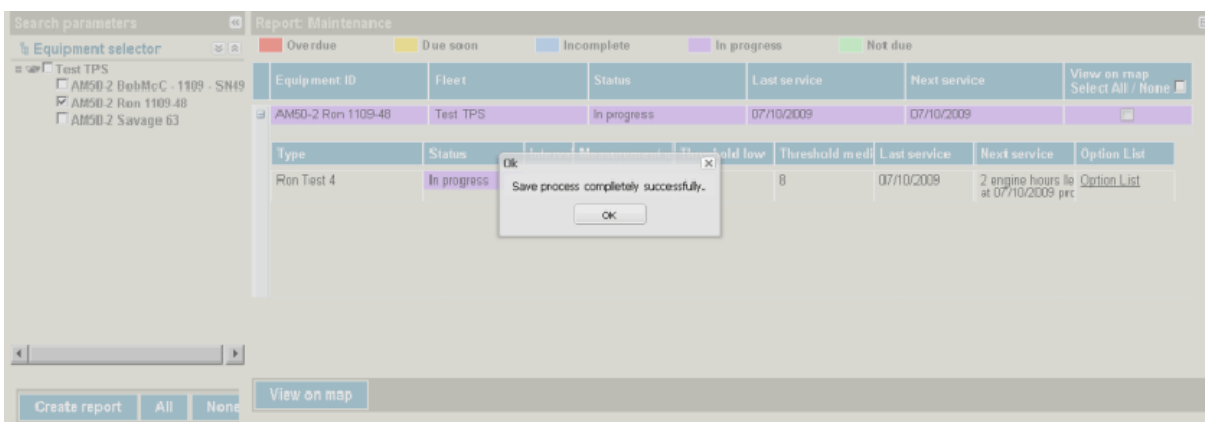

- Press the “OK” button to confirm the “Save” process.

How to view machines on the map

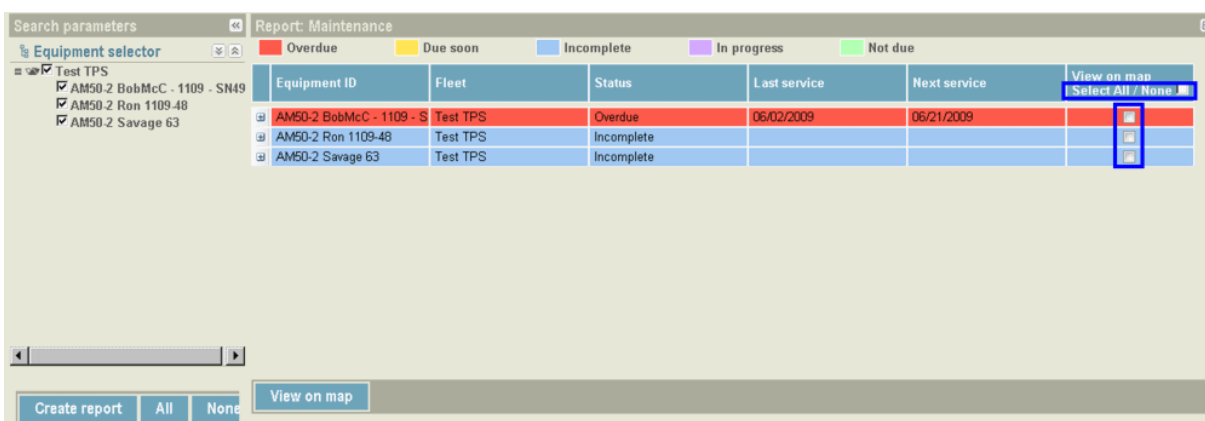


- To view all machines in a fleet or in fleets, tag the check box to the right of “Select All / None”.
- To deselect all machines, untag the check box again.
- To view one or more machines in a fleet, select each machine by tagging the check box in the “View on map” column.

Reports

- To deselect, untag the checkbox in the “View on map” column.
- Press the “View on map” button.

Example of a map showing machines in a fleet

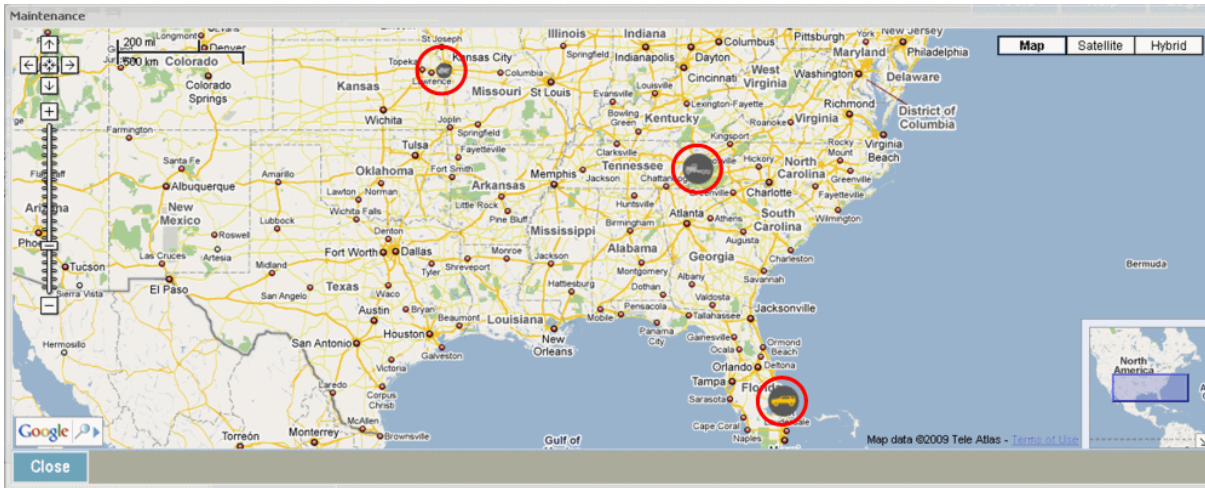

- Press the “Close” button to exit the map.

4.6 “Maintenance Notes/History” report

Report overview

The “Maintenance Notes/History” report shows all notes entered under “Administration → Devices, Administration → Equipment, Administration → Maintenance”, etc.

Equipment ID	Type	Engine hours	Service date	Activation user	Activation notes	Active service date	Closure user	Closure notes	Close service date
AM50-2 BobbMc...	service	97.74	05/21/09	Sanger	Test for User Manua...	05/21/09	Sanger	Test for User Manua...	05/21/09
AM50-2 BobbMc...	service	97.74	05/21/09	Sanger	Test for User Manua...	05/21/09	Sanger	Test for User Manua...	05/21/09
AM50-2 BobbMc...	service	194.74	05/21/09	Sanger	Test for User Manua...	05/21/09	Sanger	Test for User Manua...	05/21/09
AM50-2 BobbMc...	service	97.74	05/21/09	Sanger	Test for manual - nms	05/21/09	Sanger	Test close for manu...	05/21/09
AM50-2 RonL...	4 Hour Test	128.30	05/15/09	Ludchak		05/15/09	Ludchak		05/15/09
AM50-2 RonL...	4 Hour Test	125.20	05/15/09	Ludchak		05/15/09	Ludchak		05/15/09
AM50-2 RonL...	General insp...	125.20	05/17/09	Ludchak		05/15/09	Ludchak		05/15/09
AM50-2 RonL...	General insp...	130.86	05/21/09	Sanger		05/21/09	Sanger	Test for User Guide ...	05/21/09
AM50-2 RonL...	General insp...	129.27	05/19/09	Ludchak	Started Test Service	05/20/09	Ludchak	Test Completed	05/20/09
AM50-2 RonL...	Oil service	101.10	05/10/09	Ludchak	Test	05/10/09	Ludchak		05/10/09
AM50-2 RonL...	Oil service	122.81	05/25/09	Ludchak		05/15/09	Ludchak		05/15/09
AM50-2 RonL...	Oil service	102.31	05/15/09	Ludchak		05/11/09	Ludchak		05/15/09
AM50-2 RonL...	Oil service	122.81	05/17/09	Ludchak		05/15/09	Ludchak		05/15/09
AM50-2 RonL...	Oil service	123.20	05/15/09	Ludchak		05/15/09	Ludchak		05/15/09
AM50-2 DickS...	Oil service	319.60	05/10/09	Savage	Test	07/25/09	Ludchak		05/11/09
AM50-2 DickS...	Oil service	200.00	05/25/09	Savage	Done Test 2	05/25/09	Savage	Done Test 2	05/25/09
AM50-2 DickS...	Oil service	205.00	05/25/09	Savage	Activation Test.	05/25/09	Savage	All done test.	05/25/09
AM50-2 DickS...	Oil service	200.00	05/27/09	Savage		05/25/09	Savage		05/25/09
AM50-2 DickS...	service	200.00	05/25/09	Savage	Done Test 1	05/25/09	Savage		05/25/09

Search parameters “Date selector”, “Equipment selector”

Report panel Report results

How to create a report

- Select the “Date” and “Time” period from the “Date selector” panel.
- Select machine(s) from the “Equipment selector” panel.
- Click “Create report” to create the “Maintenance notes/history” report.

Note

If no data is available for the query, a “No data with current parameters” message will be displayed.

How to export a report to MS Excel®

Note

You must have MS Excel® installed on your computer to export this report. Click on the “Export” icon to download.

- Click on the “Export” icon to download.


4.7 “Productivity” report

Report overview

Note

The difference between the “Productivity” report and the “Activity” report is the fact that the “Productivity” report only shows the working status of machines, whereas the “Activity” report shows the working status and OFF status of machines.

The “Productivity” report shows in graphical form and in percent how much time each selected machine has spent in each status over the time period selected.

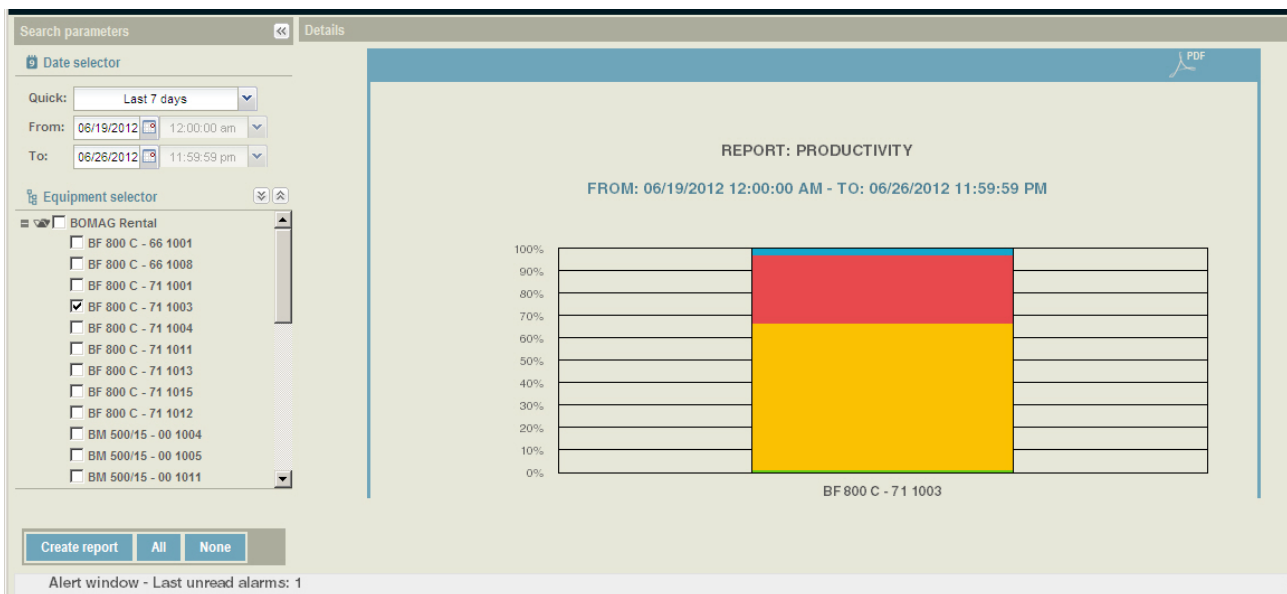

Search parameters “Date selector”, “Equipment selector”

Details Report results (see exemplary report below).

How to create a report

- Select the “Date” and “Time” period from the “Date selector” panel.
- Select machine(s) from the “Equipment selector” panel.
- Click on “Create report”.

Note

If no data is available for the query, a “No data with current parameters” message will be displayed.

How to export a report to PDF

Note

You must have a PDF reader installed on your computer to be able to view this report.

- Click on the PDF icon to export the report.

4.8 “Equipment Utilization” report

Report overview

The “Equipment Utilization” report shows how much time each selected machine was ON, OFF or NOT AVAILABLE in form of lines for the chosen date and time period. See exemplary report below.

Search parameters

Date selector

Quick:

From: 06/19/2012 12:00:00 am

To: 06/26/2012 11:59:59 pm

Equipment selector

- ☐ BM 500/15 - 00 1018
- ☐ BM 500/15 - 00 1021
- ☐ BM 500/15 - 00 1022
- ☐ BM 500/15 - 00 1027
- ☐ BM 500/15 - 00 1028
- ☐ BM 600/15 - 10 1001
- ☐ BW 120 AD-4 - 08 1677
- ☐ BW 154 AD-4 AM - 52 1023
- ☒ BW 154 AP-4 AM - 60 2041
- ☐ BW 174 AP-4 AM - 70 1158
- ☐ BW 213 DH-4 - 06 1086
- ☐ BW 213 DH-4 - 14 1370
- ☒ BW 213 DH-4 BVC - 16 1178

Report: Equipment Utilization

☒ Used less than 2 Hours ☒ Used more than 30 Hours

Equipment	Brand	Model	Type	Utilization
BF 800 C - 71 1003	BOMAG	BF 800 C	Paver	57 h : 26 m
BW 213 DH-4 BVC - 16 1178	BOMAG	BW 213 DH-4 BVC	Single Drum Roller	30 h : 19 m
BW 154 AP-4 AM - 60 2041	BOMAG	BW 154AP-4 AM2	Tandem Roller	8 h : 17 m
MPH 125 - 20 1004	BOMAG	MPH 125	Recycler	2 h : 55 m

Create report All None Page 1 of 1 1-4 of 4

Search parameters “Date selector”, “Equipment selector”

Reports panel Report results

How to create a report

Search parameters

Date selector

Quick:

From: 06/19/2012 12:00:00 am

To: 06/26/2012 11:59:59 pm

Equipment selector

- ☐ BM 500/15 - 00 1018
- ☐ BM 500/15 - 00 1021
- ☐ BM 500/15 - 00 1022
- ☐ BM 500/15 - 00 1027
- ☐ BM 500/15 - 00 1028
- ☐ BM 600/15 - 10 1001
- ☐ BW 120 AD-4 - 08 1677
- ☐ BW 154 AD-4 AM - 52 1023
- ☒ BW 154 AP-4 AM - 60 2041
- ☐ BW 174 AP-4 AM - 70 1158
- ☐ BW 213 DH-4 - 06 1086
- ☐ BW 213 DH-4 - 14 1370
- ☒ BW 213 DH-4 BVC - 16 1178

Report: Equipment Utilization

☒ Used less than 2 Hours ☒ Used more than 30 Hours

Equipment	Brand	Model	Type	Utilization
BF 800 C - 71 1003	BOMAG	BF 800 C	Paver	57 h : 26 m
BW 213 DH-4 BVC - 16 1178	BOMAG	BW 213 DH-4 BVC	Single Drum Roller	30 h : 19 m
BW 154 AP-4 AM - 60 2041	BOMAG	BW 154AP-4 AM2	Tandem Roller	8 h : 17 m
MPH 125 - 20 1004	BOMAG	MPH 125	Recycler	2 h : 55 m

Create report All None Page 1 of 1 1-4 of 4

- Filter the report by using the column header filters.

Reports

- Select the “Date” and “Time” period from the “Date selector” panel.
- Select machine(s) from the “Equipment selector” panel
- Click on “Create report”.

① Note

If no data is available for the query, a “No data with current parameters” message will be displayed.

How to modify values

① Note

Modify values before creating a report.



The screenshot shows a web interface titled "Report: Equipment Utilization". Below the title, there are two filter conditions. The first condition is "Used less than 2 Hours" with a red square icon. The second condition is "Used more than 30 Hours" with a blue square icon. Both conditions have a checked checkbox to their left.

- Untag the check box “Used less than” and/or “Used more than”.
- Enter the new value in the corresponding input field.
- Create the report.

How to export a report to MS Excel®

① Note

You must have MS Excel® installed on your computer to be able to export this report.

- Click on the “Export” icon to export the report.


4.9 “Fuel Consumption” report

① Note

The “Fuel consumption” report is only available if you are using the CANbus profile with the “Engine fuel rate” activated for reports, transmitted by the machine (works only with BOMAG TELEMATIC POWER).

Report overview

The “Fuel consumption” report shows gallons or liters of fuel used by each selected machine per hour, in graphical form for the chosen date and time period.

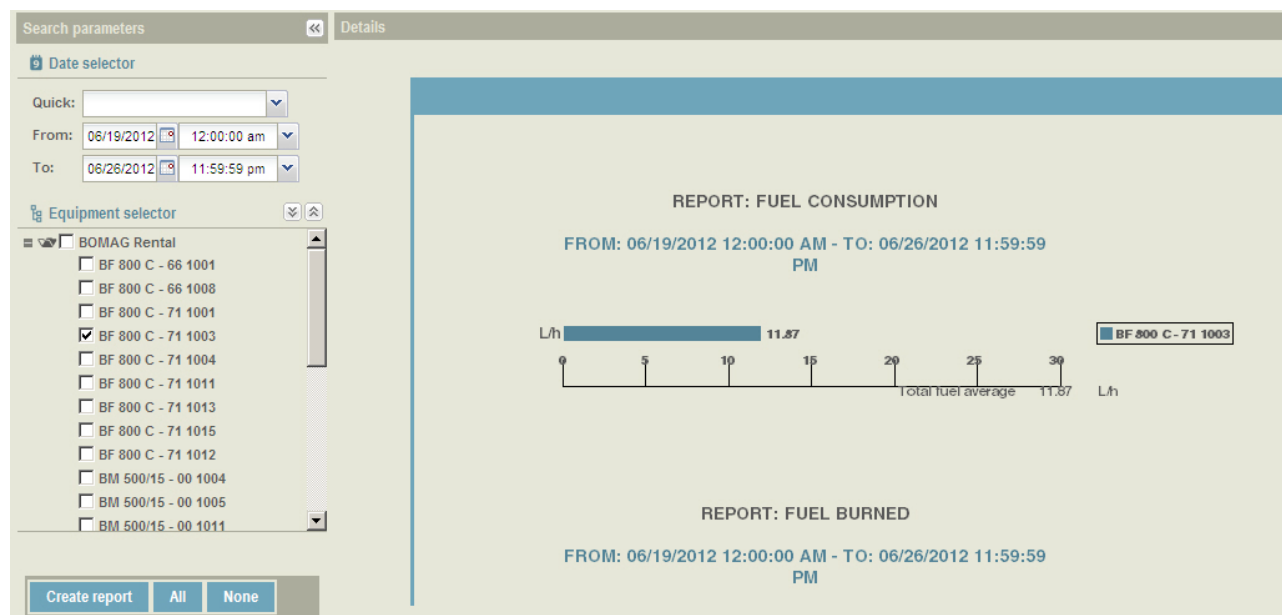

Search parameters “Date selector”, “Equipment selector”

Report panel Report results.

How to create a report

- Select the “Date” and “Time” period from the “Date selector” panel.
- Select machine(s) from the “Equipment selector” panel.
- Click on “Create report”.

① Note

If no data is available for the query, a “No data with current parameters” message will be displayed.

How to export a report to PDF

① Note

You must have a PDF reader installed on your computer to be able to view this report.

- Click on the PDF icon to export the report.

4.10 “Job Costing” report

Report overview

This report feature contains 3 separate reports: “Detailed”, “Aggregate - Equipment”, and “Aggregate - Fence”. These reports have been designed to enable the user to monitor all machine activities on a jobsite, and to create reports that help maximize productivity, minimize cost and track job costing expenses in a timely and efficient manner.

Search parameters “Date selector”, “Equipment selector”

Report panel Report results

“Detailed” report

This report, in form of lines, provides detailed information about every working session performed by each chosen machine (or groups of machines), in each chosen fence, between the entry and exit date and time within the period you selected.

Report data

Equipment ID	Machine designations
Fence	Designation of “GeoFence”
From	When selected machines have entered the fence
To	When selected machines have exited the fence

Total	Total time the selected machines were present in the fence
Active	The total time selected machines were in idle, long idle, working, and/or high workload status
Mileage (km)	Total miles or kilometers driven
Transit time	
Transit mileage (km)	

“Aggregate - equipment” report

This report, in line format, provides detailed information about each selected working machine (or groups of machines), in each fence, between the entering and exit date and within the time period you selected. Every row lists a different machine with all related aggregate results.

Report: Job Costing

Fence:

Report: Job Costing [Aggregate - Equipment]

Equipment ID	Fence	Count	Total	Active	Mileage [Km]
--------------	-------	-------	-------	--------	--------------

Report data

Equipment ID	Machine designations
Fence	Designation of “GeoFence”
Count	
Total	Total time the selected machines were inside the fence
Active	The total time the selected machines were in idle, long idle, working, and/or high workload status
Mileage (km)	Total miles or kilometers driven

“Aggregate - Fence” report

This report lists information about each working machine (or group of machines) in a specific fence (selected from the “Fence” filter), between entering and exit date, and within the time period you selected. Every line lists a different fence and all related aggregate results.

Reports

Report data

Fence name	Designation of “GeoFence”
Count	Number of times the selected machines have entered the fence
Total	Total time the selected machines spent inside the fence
Active	The total time the selected machines were in idle, long idle, working, and/or high workload status
Mileage (km)	Total miles or kilometers driven

How to create a report

Note

Before a “Job Costing” report can be created, a “GeoFence” must be set up (using the “Administration → GeoFencing” section) and assigned to the machines. In order to track all data needed for “Job Costing”, machines must be started and then enter and exit the “GeoFence”.

- Filter the report by using the column header filters.
- Select the “Date” and “Time” period from the “Date selector” panel.
- Select machine(s) from the “Equipment selector” panel.
- Select fences from the drop down menu “Fences” by clicking on each fence name you wish to include in your report. You can make single or multiple selections.
- Click the down arrow to return to the full screen.
- Select the report you wish to create by clicking on the tab: “Details, Aggregate - Equipment”, or “Aggregate - Fence” (in upper middle of your screen).
- Click on “Create Report”.

① Note

If no data is available for the query, a “No data with current parameters” message will be displayed.

How to export a report to MS Excel®

① Note

You must have MS Excel® installed on your computer to be able to export this report.

- Click on the “Export” button to export the report.


4.11 “Activity” report

① Note

The difference between the “Productivity” report and the “Activity” report is the fact that the “Productivity” report only shows the working status of machines, whereas the “Activity” report shows both the working status and the OFF status of machines.

Report overview

The “Activity” report shows in graphical form how long each selected machine was in the corresponding status.

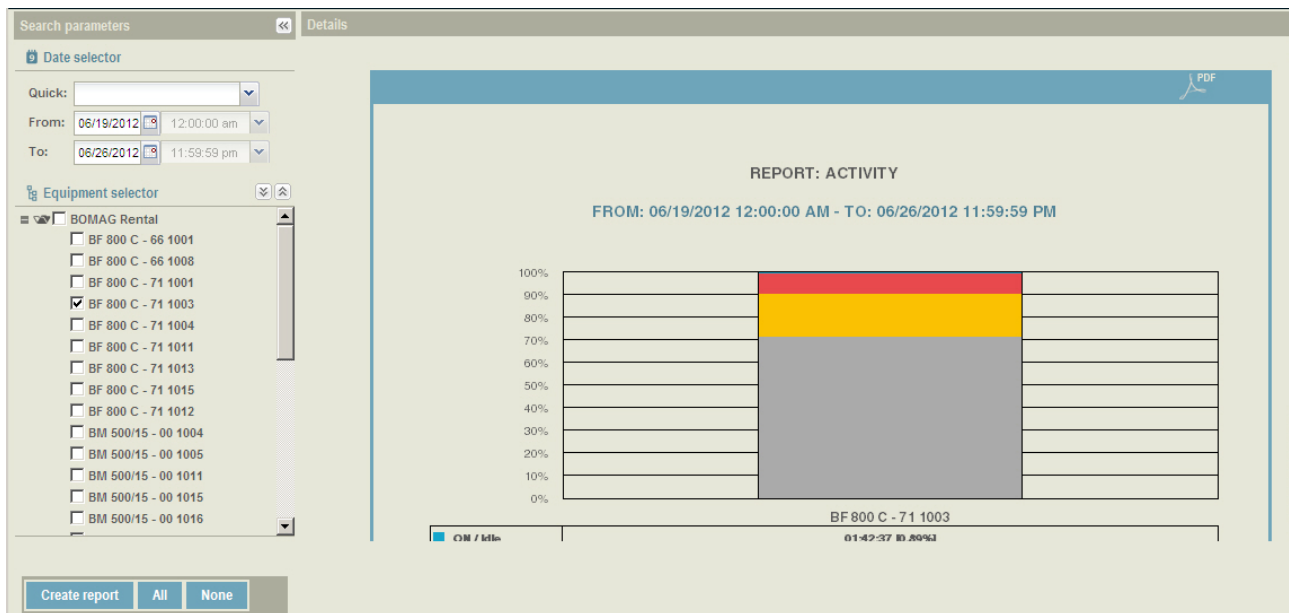

Search parameters “Date selector”, “Equipment selector”

Report panel Report results

How to create a report

- Select the “Date” and “Time” period from the “Date selector” panel
- Select machine(s) from the “Equipment selector” panel
- Click on “Create Report”.

① Note

If no data is available for the query, a “No data with current parameters” message will be displayed.

How to export a report to PDF

① Note

You must have a PDF reader installed on your computer to be able to view this report.

- Click on the PDF icon to export the report.

4.12 “Idle vs. Work” report

Report overview

The “Idle vs. Work” report in form of lines informs about the time each machine was idling vs. working. Refer to the “How to filter a report” section to customize your report.

Equipment	Brand	Model	Type	Short idle	Long idle	Total idle	Moving / Working	High Workload
BF 800 C - 71 1...	BOMAG	BF 800 C	Paver	1h 42m 37s	17h 34m 42s	19h 17m 19s	1d 13h 16m 1s	0h 22m 43s
BM 500/15 - 00 ...	BOMAG	BM 500/15	Cold planner	0h 50m 58s	2h 38m 34s	3h 29m 32s	1h 29m 52s	7h 24m 14s

Search parameters “Date selector”, “Equipment selector”


Report Report results (see exemplary report below).

Report data

Equipment	Machine designations
Fleet	Fleet designation
Brand	Brand of machines
Model	Model number of machines
Type	Type of machine
Short Idle time	Machine ON but in idle status, depending on the “Idle time threshold” as defined in the status profile used
Long Idle time	Machine ON but exceeding the “Idle time threshold” as defined in the status profile used.
Total Idle time	The total time a machine was ON.
Moving / Working time	Machine ON but is exceeding "Idle time threshold" as defined in the status profile.

Reports

How to filter a report

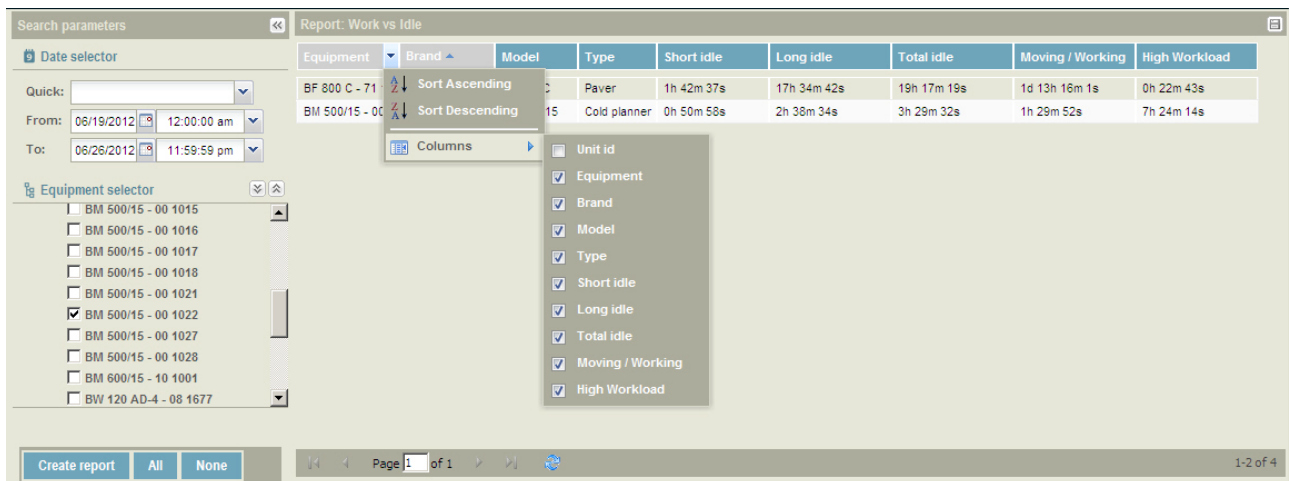

The screenshot shows the BOMAG report interface. On the left, there is a 'Search parameters' section with a 'Date selector' and an 'Equipment selector'. The 'Date selector' has 'From' and 'To' date and time pickers. The 'Equipment selector' has a list of equipment units with checkboxes. On the right, there is a 'Report: Work vs Idle' table. The table has columns for Equipment, Brand, Model, Type, Short idle, Long idle, Total idle, Moving / Working, and High Workload. A 'Columns' dropdown menu is open, showing a list of columns to be displayed: Unit id, Equipment, Brand, Model, Type, Short idle, Long idle, Total idle, Moving / Working, and High Workload. The 'Create report' button is at the bottom left, and the 'Page 1 of 1' indicator is at the bottom right.

- Filter the report by using the column header filters.

How to create a report

- Select the "Date" and "Time" period from the "Date selector" panel
- Select machine(s) from the "Equipment selector" panel
- Click on "Create report" to create the report

Note

If no data is available for the query, a "No data with current parameters" message will be displayed.

How to export a report to MS Excel®

Note

You must have MS Excel® installed on your computer to be able to export this report.

- To download, click on the "Export" button.

4.13 “CANbus data” report

Report overview

The CANbus data report in line form shows all data collected from the CANbus of selected machine(s) for the date and time period selected.

Search parameters

Date selector

Quick: [v]
 From: 06/19/2012 12:00:00 am
 To: 06/26/2012 11:59:59 pm

Equipment selector

BOMAG Rental

- ☐ BF 800 C - 66 1001
- ☐ BF 800 C - 66 1008
- ☐ BF 800 C - 71 1001
- ☒ BF 800 C - 71 1003
- ☐ BF 800 C - 71 1004
- ☐ BF 800 C - 71 1011
- ☐ BF 800 C - 71 1013
- ☐ BF 800 C - 71 1015
- ☐ BF 800 C - 71 1017

Report: CAN bus data

Equip...	Date	Engine Coolan...	Engine Fuel Rat...	Engine Hours...	Engine Oil Pressure ...	Engine Perce
BF 800...	06/...	82.0000	18.7000	253.2500	440.0000	
BF 800...	06/...	82.0000	17.4000	253.4000	444.0000	
BF 800...	06/...	82.0000	16.7500	253.5500	456.0000	
BF 800...	06/...	82.0000	12.1500	253.7500	468.0000	
BF 800...	06/...	82.0000	12.1000	253.9000	408.0000	
BF 800...	06/...	81.0000	10.2000	254.0500	428.0000	
BF 800...	06/...	82.0000	9.4500	254.2500	452.0000	
BF 800...	06/...	83.0000	15.2500	254.4000	464.0000	
BF 800...	06/...	81.0000	10.6000	254.5500	376.0000	
BF 800...	06/...	83.0000	14.5500	254.7500	348.0000	
BF 800...	06/...	82.0000	12.6000	254.9000	444.0000	
BF 800...	06/...	82.0000	10.7500	255.0500	436.0000	
BF 800...	06/...	81.0000	11.2000	255.2500	364.0000	
BF 800...	06/...	82.0000	15.6000	255.4000	436.0000	
BF 800...	06/...	81.0000	9.9000	255.5500	360.0000	

Report data selection

Description	Unit
☒ Engine Coolant Temperature	deg C
☒ Engine Fuel Rate Usage	L/h
☒ Engine Hours	hr
☒ Engine Oil Pressure	kPa
☒ Engine Percent Load at Current Speed (...)	%
☒ Engine speed	rpm

Search All None Page 1 of 3 1-200 / 443 View data Select all Select none

Search parameters “Date selector”, “Equipment selector”

Report Report results

Report data selection Select report data

Report data

- Engine coolant temperature
- Engine fuel rate usage
- Engine hours
- Engine oil pressure
- Engine percent load at current speed
- Engine speed

How to create a report

- Select the “Date” and “Time” period from the “Date selector” panel
- Select machine(s) from the “Equipment selector” panel
- Click on “Search” to list the CANbus parameters with available data covering the search period.

Note

If no data is available for the query, a “No data with current parameters” message will be displayed.

- Select the parameters you would like to view in the right panel.

How to export a report to MS Excel®

Note


You must have MS Excel® installed on your computer to be able to export this report.

- Click on the “Export” button to download.

4.14 “Input/Output” report

Report overview

For the chosen date and time period, the “Input/Output report” in graphical form informs about the duration of digital input and counter readings for selected machines. This reporting feature contains 2 separate reports: “Detailed” and “Aggregate”.

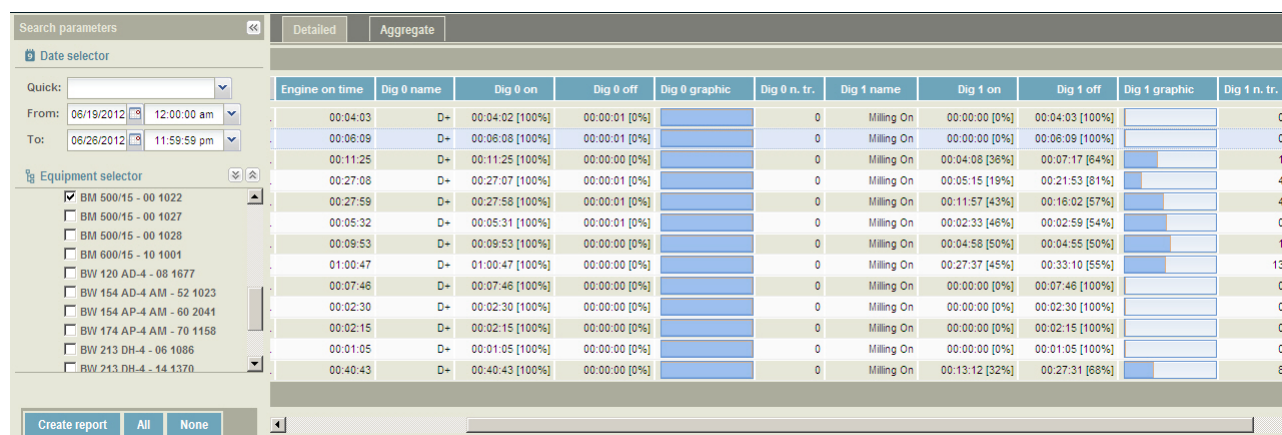

Search parameters “Date selector”, “Equipment selector”

Report Report results

Report “Detailed”

This report, in form of line and in graphical format, provides detailed information about every working session spent by each selected machine (or groups of machines).

Detailed		Aggregate									
Engine on time	Dig 0 name	Dig 0 on	Dig 0 off	Dig 0 graphic	Dig 0 n. tr.	Dig 1 name	Dig 1 on	Dig 1 off	Dig 1 graphic	Dig 1 n. tr.	

Report data

Equipment	Machine designation(s)
From	When selected machines have entered the fence
To	When selected machines have exited the fence
Engine on time	Total engine hours while on
Dig0 on	Total time and percentage that Input0 was On
Dig0 off	Total time and percentage that Input0 was Off
Dig0 graphic	Graphical information showing how much time the input was on (dark blue) and off (light blue)
Dig0 n. tr	Total number of changes between Off and On

Reports

Note

If Dig1 has been configured, the same information will be reported.

“Aggregate” report

This report, in form of lines and in graphical format, provides a single line summary for every working session of each selected machine (or groups of machines).

Search parameters

Detailed

Aggregate

Date selector

Report: I/O

Quick:

From: 06/19/2012 12:00:00 am

Equipment	Engine on time	Dig 1 name	Dig 1 on	Dig 1 off	Dig 1 graphic	Dig 1 n. tr.
BM 500/15 ...	12:23:45	Milling On	04:22:24 [21%]	08:01:21 [79%]		107

Report data

Equipment	Machine designations
Engine on time	Total engine hours while on
Dig0 on	Total time and percentage that Input0 was On
Dig0 off	Total time and percentage that Input0 was Off
Dig0 graphic	Graphical information showing how much time the input was on (dark blue) and off (light blue)
Dig0 n. tr	Total number of changes between Off and On

Note

If Dig1 has been configured, the same information will be reported

How to create a report

- Select a report type by clicking on either the “Detailed” tab or “Aggregate” tab.
- Select the date and time period from the “Date selector” panel.
- Select machine(s) from the “Equipment selector” panel.
- Click on “Create report”.

How to export a report to MS Excel®

Note

You must have MS Excel® installed on your computer to be able to export this report.

- Click on the “Export” button to download.

5 Administration

5.1 Administration - Users

① Note

You must have administrator rights to create or modify user settings.

Overview

Items list

The panel shows current users, their access right level (Group) and the “Vista” they have been assigned to.
The “Add” button is located near the top of the panel.

Details

This is where you will create, update or modify details about each user’s access right level.

How to add a new user

The screenshot shows a web application interface for user management. On the left, under the 'Items list' tab, there is a 'Users' section with an 'Add' button highlighted by a white mouse cursor. Below the button is a table with columns: Surname, Name, Login, Role, and Vista. The table contains one entry: Mustermann, Max, max.musterm..., Administrators, BOMAG_REN... On the right, under the 'Details' tab, there are input fields for Surname (Mustermann), Name (Max), Login (max.mustermann), Password (masked with dots), Office phone number, Expiration date (12/31/2050), Role (Administrators), Language (English), and User Settings (International). There is also a 'Change Password' button. On the far right, there is a 'Vistas' section with a 'Name' dropdown menu showing 'BOMAG_REN...' and a 'Select all' / 'Select none' button. At the bottom right, there is an 'Email address' field and a 'Visible in notification list' checkbox.

- Press the “Add” button.

A new line will be inserted at the top of the “Users list” (highlighted in a light blue).

- Add the following information in the “Details” panel:

Surname	User's last name
Name	User's first name
Login ID	To create a user's login, enter the name followed by a dot and the family name. Example: John Brown = john.brown
Password	• Passwords are case sensitive • Suggested minimum number of characters is 8 • System's maximum number of characters is 100 • All alphabetic and numerical characters as well as symbols such as !, @, #, etc., are accepted • Blank spaces are not accepted
Language	Select from the drop down menu
User settings	Select from the drop down menu
Office phone number	
Expiration date	Select date from drop down calendar
Vista	Select a Vista from the drop down menu to assign to the user.

Administration

Visible in
notification list

Tag the check box if you want the user to appear in the “Items list”.



Email address

- Press the “Edit” icon button.
- In the popup edit box, enter the Email address.
- Press “OK”.



- To erase information entered or selected from drop down menus, click on the “Undo” button (before saving).
- Click on “Save”.
- Click on “OK” in the popup screen to confirm completion of the save process.

Email verification

Note

You must not have administrator access rights to verify your e-mail address.

A verification e-mail is sent to the user which has been created above.

- Follow the instructions in the e-mail to verify your e-mail address in BOMAG TELEMATIC.


Dear Customer,
Thank you for registering your e-mail address in the BOMAG TELEMATIC System.

Your verification code is: 15858
Follow these steps to confirm your e-mail address:

- 1 - Log into BOMAG TELEMATIC web (<http://www.bomag.com/telematic>).
- 2 - Under Administration, click on Users Settings.
- 3 - Select your User from the User list on the left.
- 4 - In the details section on the right, click on the Red X box near to the e-mail address field.
- 5 - Enter the verification code.
- 6 - Click the Ok button.


The BOMAG TELEMATIC Team

How to deactivate a “User Profile”

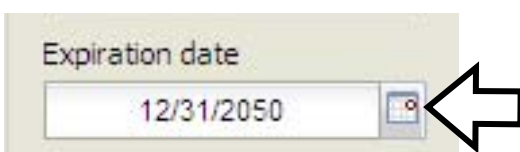

- Select the user from the “Items list”.
- Change the date in the field “Expiration date” to the date you wish the user account to be deactivated (any date from ‘today’ onwards).
- Click on “Save”

How to change a password

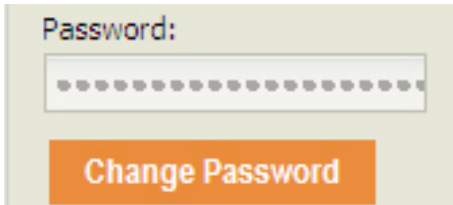A screenshot of a web form for changing a password. It features a label 'Password:' in blue text above a text input field. The input field contains a series of dots, indicating a masked password. Below the input field is an orange button with the text 'Change Password' in white.

- Select the user from the “Items list”.
- Click on the “Change Password” button in the “Details” panel.
- Enter the new password and click on “OK”.
- Click on “Save”.

5.2 Administration - Vistas

Note

You must have administrator access rights to create or modify a Vista.

Overview

A “Vista” groups machines of different fleets or companies, which are visible in the BOMAG TELEMATIC (e.g. all machines of the same machine type).

How to add or remove a “Vista”

- Click on “Add” or “Delete” in the “Items list” to add / remove a “Vista”.

After you have clicked on the “Add” button, the following picture appears:

- Open the drop-down menu and select the parent “Vista” for the new “Vista”.
- Click on “Select”.

- Insert the “Vista” name
- Select the fleet(s) visible by this “Vista”.
- Click on “Save”.

5.3 Administration - Equipment

① Note

You must have administrator access rights to create or modify an Equipment profile.

Overview

- In this section the administrator can create a profile for each machine in his fleet.

The screenshot displays the BOMAG Equipment Administration interface. On the left, the 'Items list' section shows a table of equipment. The table has columns: Equipmen..., Fleet, Brand, Type, Model, and Device. The table lists various BOMAG machines, including BF 800 C, BF 800 P, BM 500/15, BW 120 AD, BW 154 AD, BW 174 AD, BW 213 DH, BW 213 DI, BW 80 AD, MPH 122-2, and MPH 125. The 'Device' column contains numerical values representing the TELEMATIC module number.

On the right, the 'Details' section shows a form for editing a specific machine's profile. The form includes fields for Equipment ID, Plate, Machine serial number, Time Zone, Year of manufacture, and checkboxes for 'Not visible' and 'CAN bus present'. There is also a section for 'Engine hours from CAN bus' with a 'Last update' timestamp and a value of 21.3. The 'GPS Based Odometer [Km]' is set to 1. The 'Brand' is BOMAG, and the 'Model' is BF 800 P. The 'Fleets' section shows 'BOMAG Rental'. The 'Engine Model', 'Engine Brand', and 'Engine Serial' fields are empty. The 'Notes' section is a text area. At the bottom, there are 'Save' and 'Undo' buttons.

Items list

The panel shows a list of existing machines which have already been set up.

The number in the "Device" column is the number of the TELEMATIC module.

Details

Here you enter (and edit) information about each machine in your fleet.

You can display detailed data for individual machines by clicking on any machine in the "Items list"

How to create an equipment profile

Items list

Equipment...	Fleet	Brand	Type	Model	Device
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 P	617-1596
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 C	617-2556
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 C	617-1649
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 C	617-2581
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 C	617-2850
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800	617-2812
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 C	617-2855
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 P	617-1818
BF 800 C - ...	BOMAG	BOMAG	Paver	BF 800 C	617-1757
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1800
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1792
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1794
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1907
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1918
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1891
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1866
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1881
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-1908
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-2441
BM 500/15 ...	BOMAG	BOMAG	Cold planner	BM 500/15	617-2439
BM 600/15 ...	BOMAG	BOMAG	Cold planner	BM 600/15	617-1903
BW 120 A...	BOMAG	BOMAG	Tandem Roller	BW 120 AD-4	617-1772
BW 154 A...	BOMAG	BOMAG	Tandem Roller	BW 154 AD-4	617-2548
BW 154 AP...	BOMAG	BOMAG	Tandem Roller	BW 154AP-4 ...	617-1781
BW 174 AP...	BOMAG	BOMAG	Tandem Roller	BW 174AP-4 ...	617-2555
BW 213 DH...	BOMAG	BOMAG	Single Drum ...	BW 213 DH-4...	617-1769
BW 213 DH...	BOMAG	BOMAG	Single Drum ...	BW 213 DH-4	617-1761
BW 213 DH...	BOMAG	BOMAG	Single Drum ...	BW 213 DH-4...	617-1774
BW 213 DI ...	BOMAG	BOMAG	Single Drum ...	BW 213 DH-4...	617-2572
BW 80 AD...	BOMAG	BOMAG	Tandem Roller	BW 80 AD	617-1760
MPH 122-2 ...	BOMAG	BOMAG	Refuse Comp...	MPH 122-2	617-1878
MPH 125 - ...	BOMAG	BOMAG	Recycler	MPH 125	617-2573

Details

Equipment ID:

Plate:

Machine serial number:

Time Zone:

Year of manufacture:

☐ Not visible

☒ CAN bus present

☒ Engine hours from CAN bus

Last update: 05/21/2012 01:42:49 PM

Engine hours:

GPS Based Odometer [Km]:

Brand:

Type:

Model:

Fleets

BOMAG Rental

Engine Model:

Engine Brand:

Engine Serial:

Notes:

- Select the machine from the “Items list”.
- Add the following information in the “Details” panel:

Equipment ID This is the name that you assign to the machine in your fleet. The name will be used throughout the application

Plate: The license plate number of your machine

Machine Serial Number The machine serial number

Fleets The name of the fleet this machine belongs to

Time Zone Insert the time zone of the area where your machine is used, so that any alarms will be stamped with the correct time zone.

The “Time Zone” (local time) you select will be used throughout the application

Administration


	(e.g. “At a glance”, “Ping”, “History”, “Reports”, etc.)
Year of manufacturer	Year of manufacture of the machine
Not visible	You can optionally hide this in the fleet list. Selected = hide Deselected = display
CANbus present	The “CANbus present” check box is used to note whether CANbus is present on an AM50 device and whether this is SAE J1939 compliant (only available with BOMAG TELEMATIC POWER).
Engine hours from CANbus	The machine engine hours transmitted via CANbus.
Last update	Last update regarding GPS odometer and engine hours received from the device. You can manually set this value with the edit button.
Engine hours	A field where you can change the operating hours of the engine.
GPS based odometer	The GPS based odometer is automatically updated by GPS. Should this value be disaligned (i.e. GPS signal missing), you can set it up manually by clicking on the “Set” button. Please consider that the value received from the GPS odometer is less accurate than the value provided by the odometer of the machine.
Brand	The brand of machine (e.g. BOMAG).
Type	The type of machine (e.g. tandem roller).
Model	The model of the machine (e.g. BW 174 AP-4).
Engine Model	The model of the machine's engine.
Engine Brand	The brand of the machine's engine.
Engine Serial	The serial number of the machine's engine.



- Click on “Undo” to clear all fields and selections.
- Click on “Save”.

The “Equipment profile” information appears in the “Items list”.

How to filter data

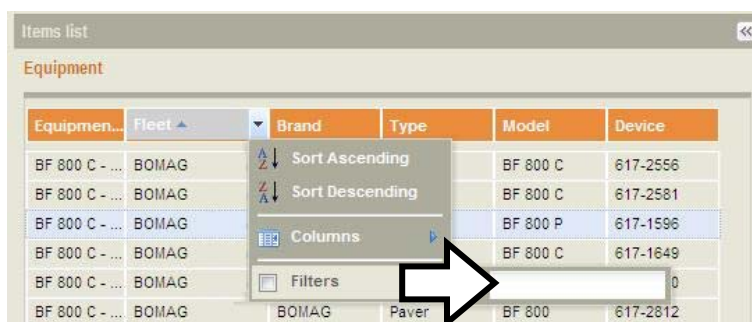

- Filter the “Items list” by using the column header filters.


Example: You have multiple fleets and wish to see all data for the fleet named “BOMAG”:

- Enter the first two or three characters of the fleet name in the input field.

The “Items list” will immediately fill up, only with the machines from the “BOMAG” fleet.


How to add a new brand, type or model

If the brand, type and/or model of a machine you are looking for cannot be found in the list, you can add it to the drop down menu in the “Details” panel.

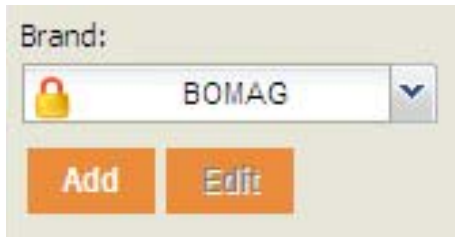

Using “Brand:” as an example:

- Select the machine you wish to add the new brand for from the “Items list”
- Click on the “Add” button for “Brand” in the “Details” panel.

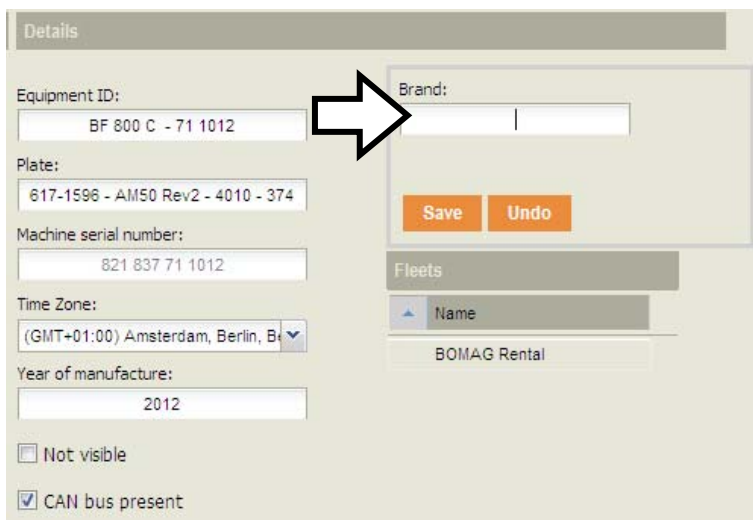

- In the “Brand:” field, enter the missing brand name.
- If necessary, select a different type from the “Type:” drop-down menu.
- Click on the “Add” button under the “Type:” field.
- Click on “Save” or “Undo” to cancel changes.




- Click on “Save”. The new brand is immediately added to the drop down menu.
- To add a new “Type” or “Model”, repeat the steps above.

How to set up the GPS odometer

The GPS based odometer is automatically updated by GPS. In case this value is disaligned (i.e. GPS signal missing), you are allowed to set up it manually.


Please consider that the value provided by the GPS odometer is not as accurate as the value provided by the machine's odometer.

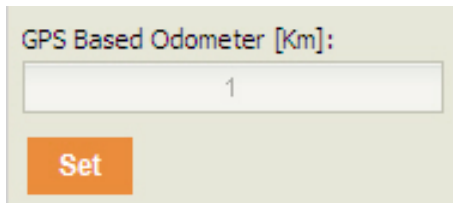

GPS Based Odometer [Km]:

Set

- Select the machine from the "Items list".
- Click on "Set". (The "Set" button is only available when the machine is running).

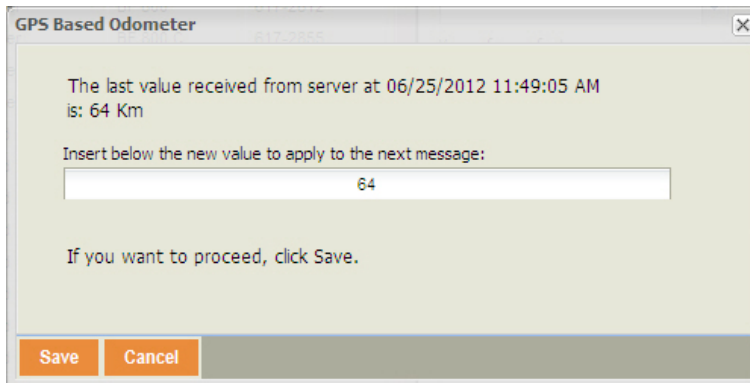

GPS Based Odometer

The last value received from server at 06/25/2012 11:49:05 AM is: 64 Km

Insert below the new value to apply to the next message:

If you want to proceed, click Save.

Save Cancel

- Enter the new value.
- Click on "Save".

The new value will be applied to the next message.

5.4 Administration - Fleets

① Note

You must have administrator access rights to create or modify a Fleet.

Overview

The screenshot displays the BOMAG Fleet Management interface, divided into two main panels: 'Items list' and 'Details'.

Items list panel: Contains a 'Fleets' section with 'Add' and 'Remove' buttons. Below is a table with one entry: 'BOMAG Rental'.

Details panel: Contains a 'Name' field with 'BOMAG Rental' and a 'Description' field with 'BOMAG Rental'. Below these is an 'Equipment List' table with columns: Equipment ID, Brand, Model, and Type. The table lists various BOMAG equipment models and their types. At the bottom of the 'Equipment List' are 'Select all' and 'Select none' buttons. Below the 'Equipment List' are 'Save' and 'Undo' buttons.

Equipment List Table:

Equipment ID	Brand	Model	Type
BF 800 C - 71	BOMAG	BF 800 C	Paver
BM 500/15 - 00	BOMAG	BM 500/15	Cold planner
BF 800 C - 66	BOMAG	BF 800 C	Paver
BM 500/15 - 00	BOMAG	BM 500/15	Cold planner
BW 174 AP-4	BOMAG	BW 174AP-4	Tandem Roller
BM 500/15 - 00	BOMAG	BM 500/15	Cold planner
BM 600/15 - 10	BOMAG	BM 600/15	Cold planner
BW 154 AD-4	BOMAG	BW 154 AD-4	Tandem Roller
BM 500/15 - 00	BOMAG	BM 500/15	Cold planner
MPH 122-2 - 07	BOMAG	MPH 122-2	Refuse Compactor
BM 500/15 - 00	BOMAG	BM 500/15	Cold planner
MPH 125 - 20	BOMAG	MPH 125	Recycler

Vistas panel: Contains a 'Name' field with 'BOMAG_RENTAL' and a 'Show User L...' link. Below are 'Select all' and 'Select none' buttons.

Items list

The panel shows a list of existing fleets that have already been set up

Details

The panel shows details about each fleet and contains the “Save” and “Undo” buttons.

How to add or remove a fleet

- Click on “Add” or “Remove” in the “Items list”.
- Enter fleet name and description.
- Link the new fleet to the “Vistas”.

With this operation the user associated with the selected “Vista”, will see the selected fleet.

- Click on “Save”.

5.5 Administration - Devices

Overview

In this section the user can view device details. Editing data is not possible. However, “Notes” may be added.

Items list

Serial Number	Equipment ID	Type	Service level	Fleet
617-1596	BF 800 C - 71 1012	AM50 Rev2	Power	BOMAG
617-1649	BF 800 C - 66 1008	AM50 Rev2	Power	BOMAG
617-1757	BF 800 C - 71 1015	AM50 Rev2	Power	BOMAG
617-1760	BW 80 AD-2 - 42 81...	AM50 Rev2	Start	BOMAG
617-1761	BW 213 DH-4 - 14 1...	AM50 Rev2	Power	BOMAG
617-1769	BW 213 DH-4 - 06 1...	AM50 Rev2	Power	BOMAG
617-1772	BW 120 AD-4 - 08 1...	AM50 Rev2	Start	BOMAG
617-1774	BW 213 DH-4 BVC -...	AM50 Rev2	Power	BOMAG
617-1781	BW 154 AP-4 AM - ...	AM50 Rev2	Power	BOMAG
617-1792	BM 500/15 - 00 1005	AM50 Rev2	Power	BOMAG
617-1794	BM 500/15 - 00 1011	AM50 Rev2	Power	BOMAG
617-1800	BM 500/15 - 00 1004	AM50 Rev2	Power	BOMAG
617-1818	BF 800 C - 71 1013	AM50 Rev2	Power	BOMAG
617-1866	BM 500/15 - 00 1018	AM50 Rev2	Power	BOMAG
617-1876	MPH 122-2 - 07 1008	AM50 Rev2	Start	BOMAG
617-1881	BM 500/15 - 00 1021	AM50 Rev2	Power	BOMAG
617-1891	BM 500/15 - 00 1017	AM50 Rev2	Power	BOMAG

Details

Type: AM50 Rev2
 Equipment: BF 800 C - 71 1012
 Service level: Power
 Firmware version: AM50 Rev2 0.8.16
 Serial Number: 617-1596
 Notes:
 Save Undo

Items list The panel shows a list of existing machines that have already been set up.

The number in the Serial number column is the serial number of the machine.

Details The panel shows details about each device and enables the addition of notes and contains also the “Save” and “Undo” buttons.

Details

Type The model number of the installed device.

Service level The subscription level; Power and Start.

Serial Number The serial number of the installed device.

Equipment This is the name that you assign to the machine in your Fleet.

Firmware version The current firmware version on the installed device.

How to hide / show devices

The screenshot shows the BOMAG Telematic interface. On the left, the 'Items list' panel displays a table of devices. The table has the following columns: Serial Number, Equipment ID, Type, Service level, and Fleet. A context menu is open over the 'Equipment ID' column, showing options for sorting (Ascending, Descending) and a 'Columns' option. The 'Details' panel on the right shows fields for Type, Equipment, Service level, Firmware version, and Serial Number, along with a 'Notes' field and 'Save' and 'Undo' buttons.

Serial Number	Equipment ID	Type	Service level	Fleet
617-1596		150 Rev2	Power	BOMAG
617-1649		150 Rev2	Power	BOMAG
617-1757				BOMAG
617-1760				BOMAG
617-1761	BW 213 DH-4 - 14 1...	AI		BOMAG
617-1769	BW 213 DH-4 - 08 1...	AI		BOMAG
617-1772	BW 120 AD-4 - 08 1...	AI		BOMAG
617-1774	BW 213 DH-4 BVC -...	AI		BOMAG
617-1781	BW 154 AP-4 AM - ...	AI		BOMAG
617-1792	BM 500/15 - 00 1005	AI		BOMAG
617-1794	BM 500/15 - 00 1011	AI		BOMAG
617-1800	BM 500/15 - 00 1004	AI		BOMAG
617-1818	BF 800 C - 71 1013	AI		BOMAG
617-1866	BM 500/15 - 00 1018	AI		BOMAG
617-1878	MPH 122-2 - 07 1008	AI		BOMAG
617-1881	BM 500/15 - 00 1021	AI		BOMAG
617-1891	BM 500/15 - 00 1017	AI		BOMAG

- Filter the Items list by using the column header filters.

How to add device notes

- Select a machine from the "Items list".
- Enter the desired notes into the "Notes:" field.
- Click on "Save".

5.6 Administration - Company data

① Note

You must have administrator access rights to create or modify the “Company” profile.

Overview

In this section the administrator enters data about his company.

The screenshot displays a web application interface for managing company data. It features two main panels: 'Items list' on the left and 'Details' on the right. The 'Items list' panel shows a table with one entry, 'BOMAG Rental', which is highlighted. The 'Details' panel contains several input fields for company information: 'Company name' (BOMAG Rental), 'Email address' (service.telematic@bomag.com), 'Phone number' (empty), 'Notes' (1.5 BOMAG Rental), 'Address' (empty), 'Zip code' (empty), 'City' (empty), and 'Country' (Germany, selected from a dropdown menu). At the bottom of the 'Details' panel are 'Save' and 'Undo' buttons.

Items list This panel shows a list of existing “Company” names that have already been set up.

Details Here you enter specific information about your company, as shown below.

How to enter / modify data

- To modify existing company and user data, highlight the data you wish to change, then either delete these or overwrite them.
- To undo all information (before saving), click on the “Undo” button.
- Click on the “Save” button to save the changes.

5.7 Administration - User Settings

① Note

You must have administrator access rights to create or modify the settings of another user.

The following settings may also be made or modified in the “Administration → Users” section:

- Language
- Time zone
- Password
- Email address.

If these settings are added or modified in the “Users” section, they will be reflected in this section and if added or modified in this section, they will be reflected in the “Users” section.

Overview

In this section the administrator can modify default “User Settings”.

With the exception of the “Date & Time” format fields, the application automatically selects the correct unit of measurement system (e.g., Mph vs. Km/h, Gph vs. L/h, etc.) based on the “User Settings” criteria you selected from the drop down menus in the “Administration → Users” profile section.

The measuring units will be used throughout the application on screens and in the reports you create.

Items list

This panel shows a list of existing “Company” names that have already been set up.

Details

Here you can modify default values for each user.

How to modify default User Settings

- Select a user from the “Items list”.
- In the “Details” panel click on the drop down arrow to the right of each setting you wish to modify, then select a setting by clicking on it with the left mouse button.
- Click on “Undo” (before saving) to undo information selected from drop down menus.
- Click on “Save”.


Passwords

- Passwords are case sensitive.
- Suggested minimum number of characters is 8.
- System’s maximum number of characters is 100.
- All alphabetical and numerical characters as well as symbols such as !, @, #, etc., are accepted.
- Blank spaces are not accepted.

To modify or add an Email address



- Click on the “Edit” button.
- In the popup edit box, enter Email address.
- Click on “OK”.
- Access your email account and locate the verification email. Copy the verification code (refer to chapter 5.1 “Administration - Users”)



- Click on the “Status” button.
- Paste or enter the verification code from the Email
- Click on “OK”.

The  button will immediately change to the  button.

5.8 Administration – “GeoFencing”

5.8.1 “GeoFencing” - create, edit, delete

① Note

You must have administrator access rights to create, edit or delete a GeoFence profile.

Overview

The “GeoFencing” function gives the Administrator the possibility to define a virtual geographical area on the map and receive information when machines exit or enter into the area. If a designated boundary is crossed, a notification or alert can be transmitted by email or text or web notification.

The screenshot displays the GeoFencing administration interface. On the left, the 'Items list' panel shows a table of existing fences. The table has columns for 'Description', 'Outside', and 'Inside'. One entry, 'BOMAG', is listed with a checked 'Outside' box and an unchecked 'Inside' box. Above the table are buttons for 'Add', 'Import shapefile', 'Remove', and 'Assign to equipment'. On the right, the 'Details' panel is shown for the 'BOMAG' fence. It includes a 'Shape: Create / View / Edit' button, a 'Fence description' field, and checkboxes for 'Use only for Job Costing', 'From inside to outside', 'From outside to inside', and 'Waypoint'. A warning message states: 'Warning: By assigning a configuration with both alarm modes checked to an AM50 Rev1 device, only one alarm will be generated when the unit leaves the fence.' The 'Alarm priority' is set to 'Low' (with options for Low, Medium, High). There are three 'Notification groups' listed, each with a 'Notification timeout [Minutes]' field set to 0. A radio button for 'Alarm in web and notification' is also present.

Description	Outside	Inside
BOMAG	☒	☐

Items list

The panel shows a list of existing “GeoFences” that have already been set up, as well as buttons for creating “GeoFences” from existing shapes; or create “GeoFences” from a new shape, remove a “GeoFence” and a shortcut to assign “GeoFences” to equipment.

Details

Here the administrator creates, edits or deletes a “GeoFence” and uses the (alarms) “Notification groups [Edit]” function, adds, edits, deletes and assigns a system user or external user to a notification group.

Items list – button definitions

“Import shapefile”

Allows you to add a new fence based on an existing shape. (An existing shape is one that has already been set-up in the “Administration → Shape” section.) Refer to the “GeoFence” editor paragraph for details.

“Add”

Allows you to add a new fence by drawing a new shape into the map. The “GeoFence” editor’s map window will be displayed to the administrator.

(Scroll down to the “GeoFence Editor” paragraph for details).

“Remove”	Allows you to remove a fence from the list. However, the fence will not be removed from the list if it has been assigned to a machine and has produced an alarm or “Job Costing” results. The fence will be disabled but past data will be accessible.
“Assign to equipment”	Is a short cut to the sub-section “GeoFencing → Assign to equipment”.

Items list - column header definitions

Description	The fence description or the fence name.
Shape	The shape name.
Alarm priority	The alarm priority assigned to the fence.
Outside	If tagged and the priority is unequal null (none), it means that the fence will produce an alarm when the machine is exiting the fence. For more details, refer to the “GeoFence and Devices” paragraph.
Inside	If tagged and the priority is unequal null (none), it means that the fence will produce an alarm when the machine is entering the fence. For more details, refer to the “GeoFence and Devices” paragraph.

Details - button definitions

“Shape:Create/View/Edit” button	Allows you to create / view or edit a shape in the map.
“Notifications groups [Edit]” button	Allows you to add, remove, and edit notification groups and to add, remove and edit users in one or more notification groups. Refer to the “How to use the notification groups [Edit]” paragraph for details.

Details - field and box definitions

Fence description	The name you assign to the Fence.
Use only for Job Costing	No alarm will be produced if this box is tagged. Data captured will be reflected in the “Job Costing Report”.
From Inside to Outside (Alarm Mode)	If tagged and the priority is unequal null, the fence will produce an alarm when the machine is exiting the fence. Refer to the “GeoFence and Devices” paragraph for details.
From Outside to Inside (Alarm Mode)	If tagged and the priority is unequal null, the fence will produce an alarm when the machine is entering the fence. Refer to the “GeoFence and Devices” paragraph for details. Note: Alarms are sent once per “Key On”/“Key Off” session if the alarm priority is unequal null and if an “Alarm Notification” with the same priority has been set up in “Administration→ Alarm Notification”.
Waypoint:	If tagged denotes a “circular” GeoFence. If you want alarm notification, also select one or both of the “Alarm Modes” listed above.
Alarm priority	There are four “Alarm Priorities” available to choose from:

Low (Yellow)	The fence will be used to provide data for “Job Costing” and to send out alarms when the machine violates a fence.
Medium (orange)	The fence will be used to provide data for “Job Costing” and to send out alarms when the machine violates a fence.
High (red)	The fence will be used to provide data for “Job Costing” and to send out alarms when the machine violates a fence.

Note

The above color coding of “Alarm Priorities” is only a label and is intended for your convenience. You may assign Low, Medium, and High as you wish. The color coded alarm priority will appear in the “Status” column of the “Alert window - Alarms”.

Alarm in web only	If tagged, no alarm notification will be sent via Email. The user can only view alarms on the web site
Alarm in web and notification	If tagged, the user will be able to view alarms on the web site and, depending on whether an email address was entered in the “User” or “User Settings” profile setup, receive an alarm notification via e-mail.
Notification 1	If tagged, an alarm notification will be send as per user’s profile setup; via e-mail.
Notification 2 & Notification timeout [Minutes]	If notification 2 is enabled and the alarm is not marked as read before the “Notification 2 timeout”, the system notifies users aligned to the notification 2 group. For details, refer to the next sub-section “How to use the notifications group [Edit] function”.
Notification 3 & Notification timeout [Minutes]	If Notification 3 is enabled and the alarm is not marked as read before the “Notification 3 timeout”, the system notifies users aligned to the notification 3 group. For details, refer to the next sub-section “How to use the notifications group [Edit] function”.

5.8.2 “GeoFence” editor

The “GeoFence Editor” is where the Administrator creates or modifies a shape in the map. By zooming with the upper left slider or by using the search tool available in the bottom left corner, the user selects the portion of the map where the Geofence will be located. (If you are new to navigating through Google® maps, see chapter 2.7 – “User Settings”).

How to create a new fence using an existing shape

The screenshot displays the 'Details' page for creating a new fence. On the left, the 'Items list' shows a table with columns 'Description', 'Outside', and 'Inside'. The 'Details' panel on the right includes a 'Shape: Create / View / Edit' button, a 'Fence description' field, checkboxes for alarm modes, a warning message, and a 'Notification groups' section with three notification entries.

Description	Outside	Inside
BOMAG	☒	☐

Shape: Create / View / Edit

Fence description: BOMAG

☐ Use only for Job Costing

☒ From inside to outside

☐ From outside to inside

Warning: By assigning a configuration with both alarm modes checked to an AM50 Rev1 device, only one alarm will be generated when the unit leaves the fence.

☐ Waypoint

Alarm priority: Low

☐ Alarm in web and notification

Notification groups [Edit]

☐ Notification 1

☐ Notification 2

☐ Notification 3

Notification timeout [Minutes]: 0

- Click on the button “Create from existing shape”. (An existing shape is one that has already been set-up in the “Administration→ Shape” section.)
- Click on the drop down arrow to select an existing shape then press “Create”.

In the details page:

- Enter the fence description
- Press the drop down arrow to select an alarm priority (low, medium or high).
- To select an alarm mode, tag the check box to the left of “From inside to outside” or “From outside to inside”.
- To create a fence with a waypoint, tag the check box to the left of “Waypoint”³. (A Waypoint fence must be circular.)
- Click on “Save”.


The description of the fence and the alarm criteria are saved and appear in the “Items list”.

The screenshot shows the 'Details' page with the 'Shape: Create / View / Edit' button highlighted.

- Click on the “Shape: Create/ View / Edit” button.

³ A Waypoint is a cycle time tool for measuring productivity. Unlike the typical GeoFence, which is used to provide alerts, Waypoints are used to count how many cycles have occurred over a user defined period of time.

If you select “Polygonal shape”

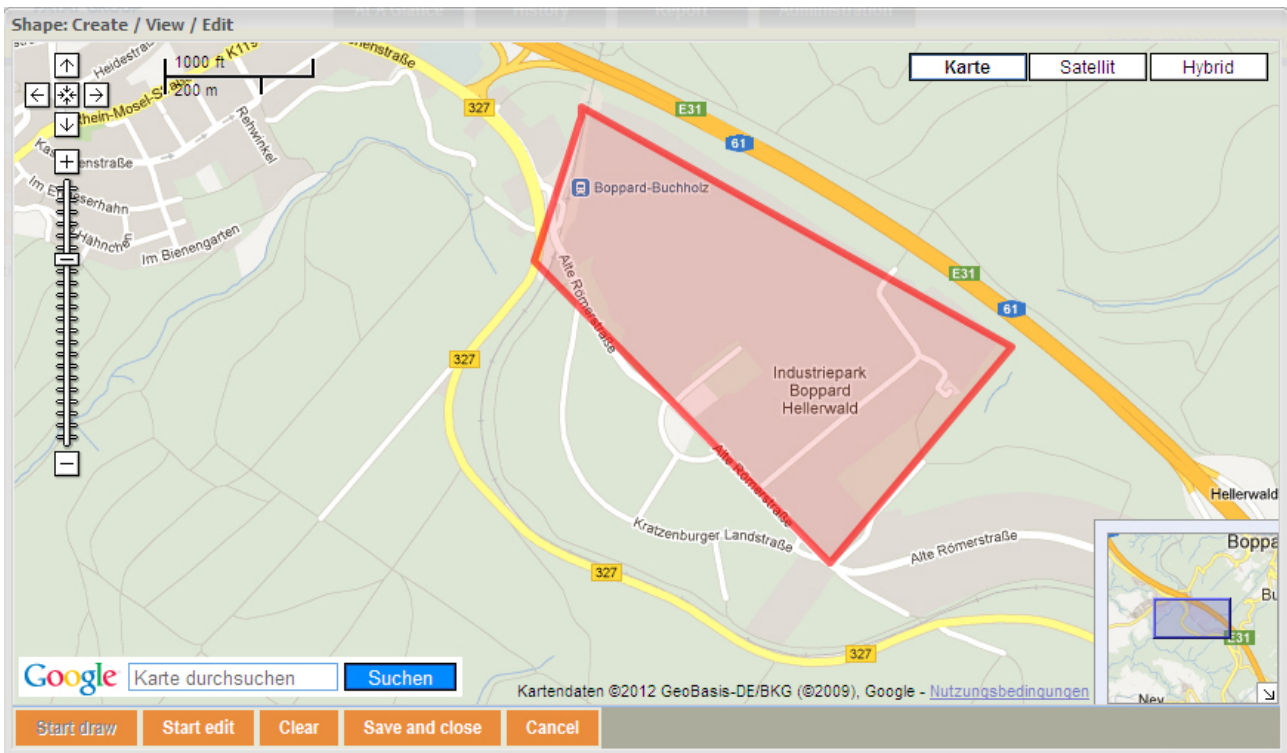


- Click on “Start edit”.
- Click each point or corner you wish to edit and drag it to the desired location.
- Click on the “Stop edit” button once you have made all of your changes.
- Click on “Save and Close”.

Your work has been saved and you will be taken back to the main “GeoFences” screen.

- To remove the modified shape, click on the “Remove” button and select “Yes” to confirm shape deletion.
- Click on “Save and close”.

If you select “Circular shape”

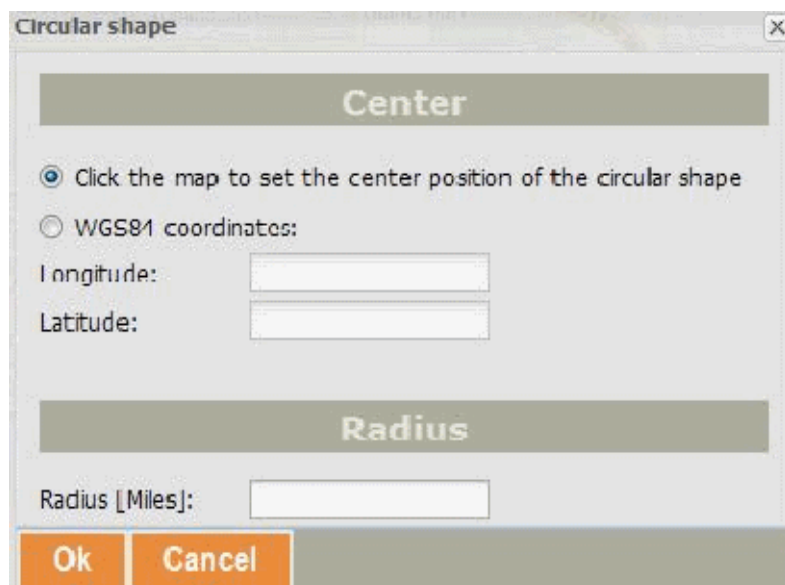

- To reset the center of the circle, tag “Click the map to set the center position of the circular shape”
- OR tag “WGS84⁴ coordinates:” then enter new longitude and latitude coordinates.
- Enter the new radius of the circle (depending on users settings, the radius measurement will either be in miles or kilometers).
- Click on “Ok”.
- Click on “Save and close”.

⁴ The World Geodetic System (WGS84) is a standard for use in cartography, geodesy, and navigation. It comprises a standard coordinate frame for the Earth, a standard spheroidal reference surface (the datum or reference ellipsoid) for raw altitude data, and a gravitational equipotential surface (the geoid) that defines the nominal sea level.

The latest revision is WGS 84 (dating from 1984 and last revised in 2004), which will be valid up to about 2010. Earlier schemes included WGS 72, WGS 66, and WGS 60. WGS 84 is the reference coordinate system used by the Global Positioning System.

Note

The “Cancel” button closes the window without saving last changes.


The “Clear” button clears the shape from the map.

How to create a new fence**“GeoFence” Tip**

Fences drawn too tightly around a perimeter can produce undesired behavior. Too small fences may produce unexpected behavior. The device needs about 30 seconds to confirm that the machine has entered/exited a fence. The device must perform this action in order to avoid recording an inaccurate fence violation. Example: A machine that drives near the GeoFence border.

It is suggested that a buffer is used around a perimeter in order to eliminate excess “GeoFence” alerts.

- Click on the “Add” button.

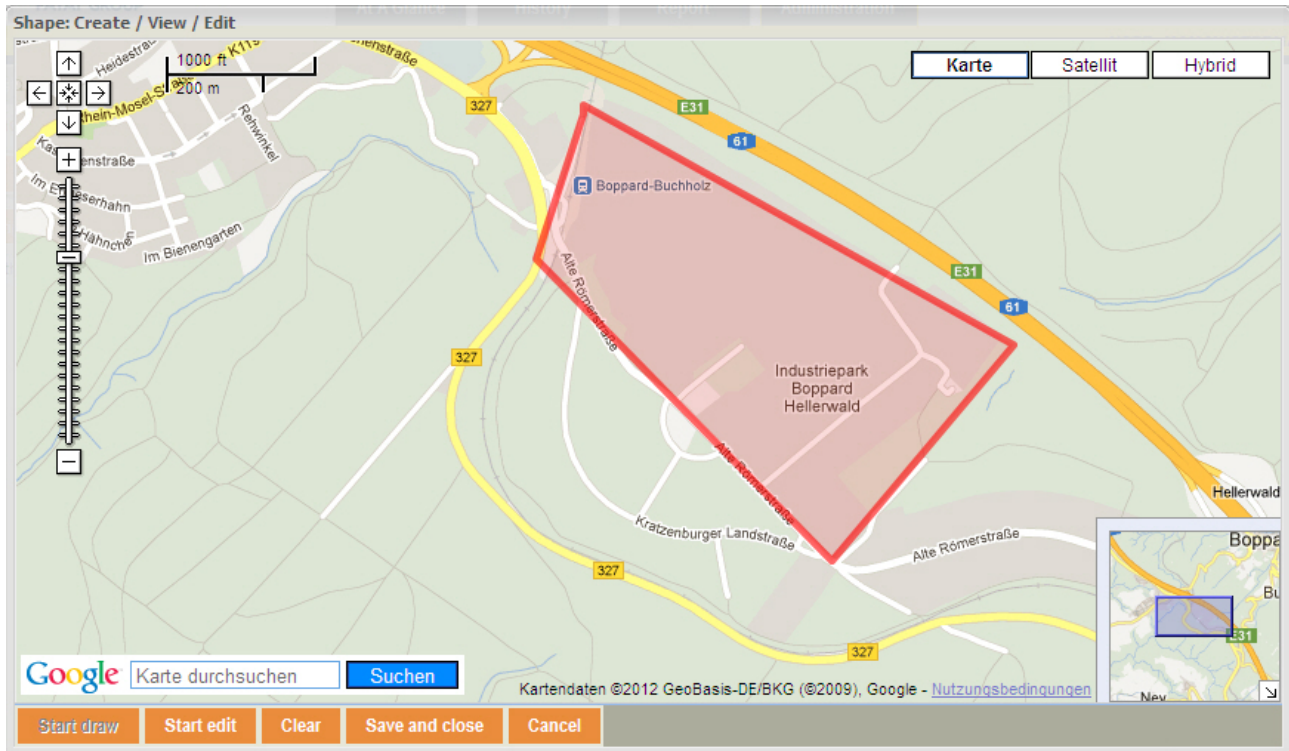

Pan and zoom to find the desired location in the Google® Map.

- Click on the “Start Draw” button
- Select either a “Polygonal” or “Circular” shape.

If a “Polygonal shape” is selected

- Click on the map for each point needed (maximum of 30 points).

Note

The polygon⁵ does not need to be closed; it will be closed by clicking on the “Stop Draw” button, then clicking on “Polygonal shape”. An almost transparent color will fill the inside of the new shape drawn.

⁵ A Polygon is a closed shape bounded by straight lines.

If a “Circular shape” is selected

- To set the center of the circle, either click on the radio button in front of “Click the map to set the center position of the circular shape”
- OR click on the radio button for “WGS4 coordinates”, then enter longitude and latitude coordinates.
- Enter the radius of the circle (depending on users settings, the radius measurement will either be in miles or kilometers).
- Click on “Ok”.

Note

The “Cancel” button closes the window without saving last changes.

The “Clear” button clears the shape from the map.

Before you can save and see the “GeoFence” you just created, you will need to name it and assign alarm priority to it.

- Enter a “Fence description”.
- Select an “Alarm priority” from the drop-down menu. Choices are: Low, Medium, High
- Select an “Alarm mode” by tagging one of the check boxes.
- Press “Save”.

The new GeoFence appears at the top of the GeoFence list on the left side of the screen.

How to remove a fence

- Select the fence you wish to remove by clicking with the left mouse button on text in one of the columns “Description”, “Shape” or “Alarm Priority”.
- Click on the “Remove” button.

A confirmation window opens.

- Click on the “Yes” button.

The fence is immediately removed from the list.

Note

The fence will not be removed from the list if it has been assigned to a machine and has produced an alarm or Job Costing results. The fence will be disabled, but past data will be accessible.

To view the right side of the screen (“GeoFence Editor” paragraph) again, click with the left mouse button on any of the fence names shown on the left side of the page under the GeoFences list.

How to Setup Alarms Notifications

Using the “Notification groups [Edit] function” enables the administrator AND user (by GeoFence) to add or remove alarm notification groups and add, edit, delete and assign system users and external users to/from each “Notification group”.

See chapter 5.15- “ (Alarm) “Notification groups [Edit]” function” for further information.

5.8.3 GeoFencing - assign to equipment

① Notes

You must have administrator access rights to create or modify settings.

Overview

In this section the administrator can assign a GeoFencing profile created in the “Administration → GeoFencing → Create, Edit, Delete” section to each machine.

How to Filter Equipment

- By filtering the fleet, brand, and/or type columns, the administrator may assign multiple “GeoFencing” profiles at one time.

Configuration: Equipment Fences - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	☐ Cold planner	
☒	BF 800 C - 71 1003	BOMAG	BOMAG	☐ Paver	
☒	BF 800 C - 71 1004	BOMAG	BOMAG	☐ Recycler	
☒	BF 800 C - 71 1011	BOMAG	BOMAG	☐ Refuse Compactor	
☒	BF 800 C - 71 1013	BOMAG	BOMAG	☐ Single Drum Roller	
☒	BF 800 C - 71 1015	BOMAG	BOMAG	☐ Tandem Roller	
☒	BF 800 C - 71 1012	BOMAG	BOMAG	☐ Paver	☐
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	☐ Cold planner	☐
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	☐ Cold planner	☐
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	☐ Cold planner	☐

Save changes **Undo**

- From the drop down menu under the fleet, brand and/or type column headers, tag or untag the check box to select or deselect a criterion
- OR click on “All”.
- Click on “Apply”.

Once you click on “Apply”, the drop down menu automatically closes.

- If you wish to close the drop down menu without applying changes, click on the “Close” button.

How to assign GeoFencing profiles to equipment

Configuration: Equipment Fences - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	Paver	☐
☒	BF 800 C - 71 1003	BOMAG	BOMAG	Paver	☐
☒	BF 800 C - 71 1004	BOMAG	BOMAG	Paver	☐
☒	BF 800 C - 71 1011	BOMAG	BOMAG	Paver	☒
☒	BF 800 C - 71 1013	BOMAG	BOMAG	Paver	☐
☒	BF 800 C - 71 1015	BOMAG	BOMAG	Paver	☐
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	☐
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1015	BOMAG	BOMAG	Cold planner	☐

Save changes Undo

- Filter the machines.
- Deselect the machine(s) that you do NOT wish to assign to the profile by untagging the corresponding check boxes.
- Select the machine(s) that you wish to assign to the profile by tagging the corresponding check boxes.

Configuration: Equipment Fences - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG Allonsine II BOMAG Rental	BOMAG	Paver	☐

Tag the check box in the header of the first column and press “SET”.

- Tag the check box in the header of the fence column and click on “SET”

This quickly matches all equipment selected in the first column to the profile.

Save changes	Undo
--------------	------

- To cancel selections made in the fence column(s), click on the “Undo” button and wait a few seconds for the application to refresh the screen.
- Click on “Save changes”
- Click on the “Ok” button to confirm changes.

5.9 Administration - CANbus

5.9.1 CANbus - create, edit, delete

① Note

You must have administrator access rights to create or modify settings.

Overview

In this section the administrator can create different CANbus profiles for each user. The panel on the left, “Items list”: is the only panel you see on your screen, until you create and save at least one “CAN bus” profile.

① Note

The profiles created will be assigned to the machines in the “Administration → CANbus → Assign to equipment” section (see chapter 5.9.2 - CAN bus - Assign to equipment).

The screenshot shows the 'Details' panel of the CANbus administration interface. At the top, there's a tab bar with 'Items list' and 'Details'. Below the tabs, the 'Profiles: Equipment CAN bus' section is visible. On the left, there's a list of profile names with 'CAN_Standard' selected. To the right of the list, there are buttons for 'Add', 'Remove', and 'Assign to equipment'. The main area displays the details for the 'CAN_Standard' profile, including a 'Profile name' input field and an 'Alarms notifications' button. Below this is a table with columns: Parameter name, Data Frame, CAN bus protocol, Detection type, Report / Alarms, Behaviour, Threshold, Duration [sec], and an 'Edit' link. The table contains four rows of engine parameters, all with checkboxes in the first column. At the bottom, there are 'Save' and 'Undo' buttons.

	Parameter name	Data Frame	CAN bus protocol	Detection type	Report / Alarms	Behaviour	Threshold	Duration [sec]	
☒	Engine Oil Pressure	Extended (29 bit)	J1939	Last	Report				Edit
☒	Engine Coolant Temperature	Extended (29 bit)	J1939	Last	Report				Edit
☒	Engine Fuel Rate Usage	Extended (29 bit)	J1939	Average	Report				Edit
☒	Engine speed	Extended (29 bit)	J1939	Last	Report				Edit

Items list

The panel shows current profile names

The “Add” and “Remove” buttons are used to create and remove profiles

Details

This is where you will create, or modify information about each machine's CANbus profile as well as set the Alarm notification

How to add a new CANbus profile

The screenshot shows the 'Items list' panel of the CANbus administration interface. It features a tab bar with 'Items list' and 'Details'. Below the tabs, the 'Profiles: Equipment CAN bus' section is visible. On the left, there's a list of profile names. To the right of the list, there are buttons for 'Add', 'Remove', and 'Assign to equipment'. The 'Profile name' input field is empty, and the 'Alarms notifications' button is present.

- Click on the “Add” button in the “Items list”.
- Enter a profile name in the input field “Profile name:”
- Click on “Save”.

After you have created the new profile, you must choose the parameters:

Administration

Details

Profile name: Alarms notifications

	Parameter name	Data Frame	CAN bus protocol	Detection type	Report / Alarms	Behaviour	Threshold	Duration [sec]	
☒	Engine Oil Pressure	Extended (29 bit)	J1939	Last	Report				Edit
☒	Engine Coolant Temperature	Extended (29 bit)	J1939	Last	Report				Edit
☒	Engine Fuel Rate Usage	Extended (29 bit)	J1939	Average	Report				Edit
☒	Engine speed	Extended (29 bit)	J1939	Last	Report				Edit

Save Undo

- Tag the check box to the left of each CANbus parameter you wish to be monitored. After you have chosen a parameter the “Edit” button appears.
- Click on the “Edit” button.

Edit CAN Line

Detection type:

▼

Average

Last

Max

Min

☐ Alarms

☐ Report / Alarms

Behaviour:

▼

Threshold:

Duration [sec]:

Save Cancel

- Choose the “Detection Type” (Average, Last, Max, Min) from the drop-down menu.

Edit CAN Line

Detection type:
 Last ▼

Report / Alarms:
☐ Report
☒ Alarms
☐ Report / Alarms

Behaviour:
 equal to ▼
 equal or greater than
 equal or less than
 equal to
 greater than
 less than

Threshold: 0

Duration [sec]: 3

Save

- From Report / Alarms select Reports, Alarms or Report / Alarms.
- For each selected parameter choose the behaviour (this option is only available when the option “Alarms” or “Report / Alarms” is selected).
- Enter the “Threshold” (in numericals).
- Enter the “Duration” (in seconds).

① Note

Before sending the alarm, the device will check the alarm's condition continuously over the specified duration. The minimum number of seconds is 3.

- To undo information entered or selected from drop-down menus (before saving), click on the “Undo” button.
- Click on “Save”.

A “Save process completed successfully” message appears confirming that your data has been saved.

① Note

The “Engine Fuel Rate Usage” parameter is detected by default using the “Average” detection type, in order to provide the right input for the Fuel Report. If you want to change the detection type for this parameter, then the Fuel Report will be impacted.

How to Modify or Remove a CAN bus Alarms Profile

To modify a profile

- Select the Profile name that is to be modified in the “Items list”.
- In the “Details” panel all the details about the Profile name you have selected are displayed.
- For text fields, highlight and delete existing information, then enter new information.

Administration

- For drop down menu items, click the drop down arrow and click on the new choice.
- To undo information entered or selected from drop down menus, click the “Undo” button (before saving).
- Click the “Save” button

A “Save process completed successfully” message appears confirming that your data has been saved.

To remove a profile

- Select the Profile name that is to be removed in the “Items list”.
- Press “Remove”.
- Press the “Yes” button in the “Confirm deletion” text box.

Profile is removed from the “Items list”.

How to Setup Alarms Notifications

Using the “Notification groups [Edit] function” allows the Administrator AND User (by GeoFence) to add or remove alarm notification groups and add, edit, delete and assign System Users and External Users to/from each Notification group.

See chapter 5.15- “ (Alarm) “Notification groups [Edit]” function” for further information.

5.9.2 CAN bus - Assign to equipment

Overview

Note

Available only with BOMAG TELEMATIC POWER.

In this section the Administrator can assign, to each machine, a CANbus Alarms profile created in the “Administration→CANbus alarms→Create, Edit, Delete” section (see chapter 5.9.1- “CANbus - create, edit, delete”).

How to filter equipment

By filtering the fleet, brand, and/or type columns, the administrator can assign multiple CANbus alarm profiles at a time.

Configuration: Equipment CAN bus - 25 Results						
Selected	Equipment ID	Fleet	Brand	Type	Profile	
☐ 						
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	Paver	CAN_St...	
☒	BF 800 C - 71 1003	BOMAG	BOMAG	Paver	CAN_St...	
☒	BF 800 C - 71 1004	BOMAG	BOMAG	Paver	CAN_St...	
☒	BF 800 C - 71 1011	BOMAG	BOMAG	Paver	CAN_St...	
☒	BF 800 C - 71 1013	BOMAG	BOMAG	Paver	CAN_St...	
☒	BF 800 C - 71 1015	BOMAG	BOMAG	Paver	CAN_St...	
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	CAN_St...	
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	CAN_St...	
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	CAN_St...	
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	CAN_St...	
☒	BM 500/15 - 00 1015	BOMAG	BOMAG	Cold planner	CAN_St...	
Save changes Undo						

- From the drop down menu under the fleet, brand and/or type column headers, tag or untag the checkbox to select or deselect a criteria.
- OR click on “All”.
- Click on “Apply”.

Once you press “Apply”, the drop down menu automatically closes.

- If you wish to close the drop-down menu without applying changes, click on the “Close” button.

How to assign CANbus alarm profiles to equipment

To assign a status profile to one or more (but not all) machines

Configuration: Equipment CAN bus - 25 Results					
Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	Paver	CAN_St...
☒	BF 800 C - 71 1003	BOMAG	BOMAG	Paver	CAN_St...
☒	BF 800 C - 71 1004	BOMAG	BOMAG	Paver	CAN_St...
☒	BF 800 C - 71 1011	BOMAG	BOMAG	Paver	CAN_St...
☒	BF 800 C - 71 1013	BOMAG	BOMAG	Paver	CAN_St...
☒	BF 800 C - 71 1015	BOMAG	BOMAG	Paver	CAN_St...
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	CAN_St...

- Select the machines by tagging the check boxes to the left of each machine name.
- Select a profile name from the drop-down menu underneath the Profile column.
- Click on the “SET” button located in the very last column.
- To cancel selections, click on the “Undo” button (before saving).
- Click on “Save changes”.

To assign a CANbus alarm profile to all machines

- Filter the machines.
- Select the machines by tagging the check boxes to the left of each machine name.

Configuration: Equipment CAN bus - 25 Results					
Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	Paver	CAN_St...
☒	BF 800 C - 71 1003	BOMAG	BOMAG	Paver	CAN_St...

- Tag the check box in the header of the first column and press “SET”.
- Select a profile name in the header of the profile column and press “SET”.

- To cancel selections click on the “Undo” button and wait a few seconds for the application to refresh the screen.
- Click on “Save changes”

Administration

- Click on “Ok” to confirm changes.

5.10 Administration - Status

5.10.1 Status - create, edit, delete

① Note:

Creation of a CANbus profile based on RPMs is only available with BOMAG TELEMATIC POWER.

You must have administrator access rights to create or modify status.

Overview

In this section the Administrator can create one or more status threshold profiles for each machine or group of machines in the fleet. The created profiles will be assigned to machines in the “Administration→Status→Assign to equipment” section (see chapter 5.10.2 – “Status - assign to equipment”).

Items list The panel shows a list of existing profiles that have already been set up.

The “Add” and “Remove” buttons are located near the top of the panel.

Details Here you set up the “Status profiles” for each machine.

Available status profiles

Based on CAN	CANbus RPM data
Based on digital input	a digital input
Based on speed	a speed threshold
Based on speed and digital input	a speed threshold and a digital input

Status definitions

Grey	OFF	Any position sent from the device when the machine is OFF (i.e. motion detection).
Blue	ON / Idle	Machine ON, but in idle state, depending on the “Idle time threshold”, as defined by the status profile used
Red	Long Idle	Machine ON, but exceeding the “Idle time threshold” as defined

Administration

		in the status profile used.
Yellow	Moving / Working	Machine ON, but between “threshold A” and “threshold B” as defined in the status profile used.
Green	High workload	Machine ON, but exceeding the “threshold B” as defined in the status profile used.

How to create, edit or delete a status profile “based on CANbus RPM-data”

Note:

Only available with BOMAG TELEMATIC POWER.

To create a new profile

- Click on the “Add” button in the “Items list”.

In the “Details” panel:

- Enter the “Profile name”.

Note

Profile name: For easy assignment to configuration settings and because the engine speed threshold depends on the machine type, we suggest that you include the type and brand name of the machine in the profile name, e.g., Tandem Roller, BOMAG.

- Select “Based on CAN” from the drop down menu “Configuration type”.
- Enter “Time threshold” in minutes.
- Enter RPM in “Threshold A”.
- Enter RPM in “Threshold B”.
- Click on “Save” to save profile in the database.

To remove a profile

- Select the profile name you wish to remove in the “Items list”.
- Click on the “Remove” button.
- Click on the “OK” button to confirm deletion.

The Profile will be removed.

Note

To view the “Details” panel after deleting a profile, click on one of the profile names in the “Items list”.

How to create, edit or delete a status profile “Based on speed”

To create a new profile

The screenshot displays the BOMAG Telematic interface. On the left, the 'Items list' panel shows a table of profiles under the heading 'Profiles: Equipment Status'. The table has two columns: 'Profile name' and 'Configuration type'. Two profiles are listed: 'idle-1000-low_1500-hig...' and 'idle-1000-low_2000-hig...', both with a configuration type of 'Based on CAN'. Above the table are buttons for 'Add', 'Remove', and 'Assign to equipment'. On the right, the 'Details' panel is active, showing a form for editing a profile. It includes a 'Profile name' text field, a 'Configuration type' dropdown menu set to 'Based on speed', a 'Time threshold [Minutes]' text field, and a 'Speed threshold [Km/h]' text field. At the bottom of the form are 'Save' and 'Undo' buttons.

- Click on the “Add” button in the “Items list”.

In the “Details” panel:

- Enter the “Profile name”.

Note

Profile name: For easy assignment to configuration settings and because the threshold of the engine speed depends on the machine type, we suggest that you include the type and brand name of the machine in the profile name, e.g., Tandem Roller, BOMAG.

- Select “Based on speed” from the drop down-menu “Configuration type”.
- Enter the time threshold in minutes.

Note:

Time threshold: If the speed of the machine is lower than the specified speed threshold, the status is idle; if the machine is in idle state for longer than the specified time threshold, idle becomes a long idle. Long idle is an undesired condition.

- Enter the speed threshold in miles per hour or kilometers per hour.

Note:

Speed threshold: When the speed overrides the specified threshold, the status becomes Working/Moving.

- Click on “Save”.

Administration

To delete a profile

- Select the profile name you wish to remove from the “Items list”.
- Click on the “Remove” button.
- Click on the “OK” button to confirm deletion.

The Profile will be removed.

Note

To view the “Details” panel after deleting a profile, click on one of the profile names in the “Items list”.

How to create, edit or delete a status profile “Based on digital input”

To create a new profile

The screenshot displays the BOMAG TELEMATIC administration interface. On the left, the 'Items list' panel shows a table with two columns: 'Profile name' and 'Configuration type'. It contains two rows of data. Above the table are buttons for 'Add', 'Remove', and 'Assign to equipment'. On the right, the 'Details' panel shows fields for 'Profile name', 'Configuration type' (set to 'Based on digital input'), 'Input' (set to 'Input 0'), and 'Time threshold [Minutes]'. There are 'Save' and 'Undo' buttons at the bottom of the 'Details' panel.

- Click on the “Add” button in the “Items list”.

In the “Details” panel:

- Enter the profile name

Note

Profile name: For easy assignment to configuration settings and because the threshold of the engine speed depends on machine type, we suggest that you include the type and brand name of the machine in the profile name, e.g., Tandem Roller, BOMAG.

- Select “Based on digital input” from the drop down menu “Configuration type”.
- From the “Input” drop down menu, select either Input 1 or Input 2.

Note

Input: Configuration of the digital input is the responsibility of the installer (see “Administration → Input/Output”).

- Enter the time threshold in minutes.

Note

Time threshold: If the selected digital input is lower than the specified speed threshold, the status is idle; if the machine is in idle state for more than the specified time threshold, idle becomes a long idle. Long idle is an undesired condition.

- Click on “Save”.

To delete a profile

- Select the Profile name you wish to remove from the “Items list”.
- Click on the “Remove” button.
- Click on the “OK” button to confirm deletion.

The profile will be removed.

Note

To view the “Details” panel after deleting a profile, click on one of the Profile names in the “Items list”.

How to create, edit or delete a status profile “Based on speed & digital input”**To create a new profile**

- Click on the “Add” button in the “Items list”.

In the “Details” panel:

- Enter the “Profile name”.

Note

Profile name: For easy assignment to configuration settings and because the threshold of the engine speed depends on machine type, it is suggested that you include the type and brand name of the machine in the profile name, e.g., Tandem Roller, BOMAG.

- Select “Input” from the “Configuration type” drop down menu.
- Select either Input 1 or Input 2 from the drop-down menu “Input”.

Administration

① Note

Input: Configuration of the digital input is the responsibility of the installer (see “Administration → Input/Output”).

- Enter the time threshold in minutes.

① Note

Time threshold: If the selected digital input is lower than the specified speed threshold, the status is idle; if the machine remains in idle state for more than the specified time threshold, idle becomes a long idle. Long idle is an undesired condition.

- Enter the speed threshold in miles per hour or kilometers per hour.

① Note

Speed threshold: When the Speed overrides the specified threshold or the digital input becomes high, the status changes to Working/Moving.

- Click on “Save”.

To delete a profile

- Select the Profile name you wish to remove from the “Items list”.
- Click on the “Remove” button.
- Click on the “OK” button to confirm deletion.

The profile will be removed.

① Note

To view the “Details” panel after deleting a profile, click on one of the profile names in the “Items list”.

5.10.2 Status - assign to equipment

① Note

You must have administrator access rights to create or modify a status profile.

Overview

In this section the administrator assigns the status profiles created in “Administration→Status→Create, Edit, Delete” to each machine (see chapter 5.10.1 – “Status - create, edit, delete”).

How to filter equipment

By filtering the fleet, brand, and/or type columns, the administrator can assign multiple alarm profiles at a time.

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	☐ Cold planner	
☒	BF 800 C - 71 1003	BOMAG	BOMAG	☐ Paver	
☒	BF 800 C - 71 1004	BOMAG	BOMAG	☐ Recycler	
☒	BF 800 C - 71 1011	BOMAG	BOMAG	☐ Refuse Compactor	
☒	BF 800 C - 71 1013	BOMAG	BOMAG	☐ Single Drum Roller	
☒	BF 800 C - 71 1015	BOMAG	BOMAG	☐ Tandem Roller	
☒	BF 800 C - 71 1012	BOMAG	BOMAG	☐ All	
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	☐ None	
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	☐ Apply	
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	☐ Close	

Save changes Undo

- From the drop down menu under the fleet, brand and/or type column headers, tag or untag the check box to select or deselect a criterion.
- OR click on “All”.
- Click on “Apply”.

Once you clicked on “Apply”, the drop down menu closes automatically.

- If you wish to close the drop-down menu without applying changes, click on the “Close” button.

How to assign a status profile to equipment

To assign a status profile to one or more (but not all) machines

Configuration: Equipment Status - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG Allonsine II BOMAG Rental	BOMAG	Paver	idle-1
☒	BF 800 C - 71 1003	BOMAG Allonsine II BOMAG Rental	BOMAG	Paver	idle-1000
☒	BF 800 C - 71 1004	BOMAG Allonsine II BOMAG Rental	BOMAG	Paver	idle-1000

idle-1000
idle-1000
idle-1

- Select the machines by clicking on the check boxes to the left of each machine name.
- Select a profile name from the drop-down menu underneath the profile column.
- Click on the “SET” button located in the last column.
- To cancel selections, click on the “Undo” button (before saving).
- Click on “Save”.

To assign a status profile to all machines

- Filter the machines.
- Select the machines by clicking on the check boxes to the left of each machine name.

Administration

Configuration: Equipment CAN bus - 25 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					SET
NO FILTER		NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG Allionsine II BOMAG Rental	BOMAG	Paver	CAN_St

- Tag the check box in the header of the first column and press "SET".
- Select a profile name in the header of the profile column and press "SET".

- To cancel selections click on the "Undo" button and wait a few seconds for the application to refresh the screen.
- Click on "Save changes"
- Click on "Ok" to confirm changes.

5.11 Administration - Power Management

5.11.1 Power Management - create, edit, delete

① Notes

You must have administrator access rights to create or modify settings.

Overview

In this section the administrator will create power management profiles that will be assigned to the machines in the “Administration → Power Management → Assign to equipment” section (see chapter 5.11.2 – “Power management - assign to equipment”).

The screenshot displays the 'Details' panel for a power management profile. On the left, the 'Items list' tab shows a table with columns 'Profile name', 'Standby duration [Hours]', and 'Sleep duration'. The table contains one entry: 'Power Management_Standard' with values 24 and 96. Above the table are buttons for 'Add', 'Remove', and 'Assign to equipment'. The main 'Details' panel includes a 'PLEASE NOTE' section, a 'Profile name' field, and input fields for 'Standby duration [Hours]' (24) and 'Sleep duration [Hours]' (96). It also features a 'Notification groups [Edit]' section with three notification entries, each with a checkbox, a dropdown menu, and a 'Notification timeout [Minutes]' field. The 'Alarm on power state change' section has a dropdown menu set to 'Engine Off' and an 'Alarm priority' dropdown. The 'Motion detection mode' section has a dropdown set to 'Always in key off' and a note about Curfew mode. The 'Alarm in web only' section has a radio button selected. The 'Alarm priority' section has a dropdown set to 'Low'. At the bottom are 'Save' and 'Undo' buttons.

Items list

This panel shows a list of the existing profiles that have already been set up, as well as buttons for creating new or removing power management profiles.

Details

The administrator uses this panel to create, edit or delete a power management profile and, by using the “(Alarms) Notification groups [Edit]” function, manage the alarm policy for the current power management profile simply by adding, editing, deleting and assigning system users and/or external users to a notification group.

Administration

Profiles

Profile name	This is the name you assign to the profile	
Standby duration (Hours)	Length of time the device remains in standby, waiting for Ping, and erasing logged data. Minimum 1 hour, maximum 49 days (expressed in hours)	
Sleep duration (Hours)	Length of time the device remains in sleep mode. In this mode only the motion detection and scheduled wakeup are activated. Minimum 24 hours, maximum 30 days (expressed in hours)	
Motion detection mode	Never	deactivated
	Always in Keyoff	always activated
	Curfew	only activated if selected and if a curfew profile has been set up under "Administration→Curfew>Create, Edit, Delete" and "Administration→Curfew→Assign to equipment"
Motion detection sensitivity	Enables monitoring of motion detection by selecting a "Low", "Medium" or "High" sensitivity level (acceleration perceived by the accelerometer) and setting alarm priority and alarm notification.	

How to add a new power management profile

The screenshot displays the 'Details' configuration page for a 'Power Management' profile. On the left, a table lists existing profiles with columns for 'Profile name', 'Standby duration', and 'Sleep duration'. The main area contains a 'PLEASE NOTE' section and several configuration fields:

- Profile name:** A text field containing 'Power Management_Standard'.
- Standby duration [Hours]:** A text field containing '24'.
- Sleep duration [Hours]:** A text field containing '96'.
- Alarm on power state change:** A dropdown menu set to 'Engine Off'.
- Alarm priority:** A dropdown menu.
- Alarm notification:** Radio buttons for 'Alarm in web only' (selected) and 'Alarm in web and notification'.
- Notification groups:** A section with three notification entries, each with a checkbox, a dropdown menu, and a 'Notification timeout [Minutes]' field.
- Motion detection mode:** A dropdown menu set to 'Always in key off'.
- Motion detection sensitivity:** A dropdown menu set to 'Low'.
- Alarm priority:** A dropdown menu set to 'Low'.
- Alarm notification:** Radio buttons for 'Alarm in web only' (selected) and 'Alarm in web and notification'.
- Notification groups:** A section with three notification entries, each with a checkbox, a dropdown menu, and a 'Notification timeout [Minutes]' field.

At the bottom, there are 'Save' and 'Undo' buttons.

- Click on the “Add” button in the “Items list”.

In the “Details” panel:

- Profile name: Enter a “Profile name” in the text field.
- Standby duration [Hours]: Enter a numeric value.
- Sleep duration [Hours]: Enter a numeric value.
- Alarm on power state change: Click on the drop down arrow, then select one of the options.
 - o “Never”
 - o “Engine Off”
- Alarm priority: Click on the drop down arrow then select one of the options.
 - o “Low”
 - o “Medium”
 - o “High”

Motion detection mode:
Always in key off ▼

If the Motion detection mode is set to Curfew, a Curfew profile must be assigned to the equipment.

Motion detection sensitivity:
Low ▼

Alarm priority:
⚠ Low ▼

☒ Alarm in web only
☐ Alarm in web and notification

Notification groups [Edit]

- Motion detection mode: Click on the drop down arrow then select one of the options.
 - o “Never”
 - o “Always in key off”
 - o “Curfew”
- Motion detection sensitivity: Click on the drop down arrow then select one of the options.
 - o “Low”
 - o “Medium”
 - o “High”
- Click on “Save”.

How to remove a power management profile

Items list

Profiles: Power Management

Add Remove Assign to equipment

Profile name	Standby duration	Sleep duration
Power Manage...	24	96

- Select the profile name you wish to remove from the "Items list".
- Click on "Remove".
- Click on "Yes" to confirm item deletion.

How to setup alarm notifications

The "Notification groups [Edit] function" enables the administrator AND users (by GeoFence) to add or remove alarm notification groups and add, edit, delete and assign system users and external users to/from each "Notification group".

See chapter 5.15- "Notification groups [Edit] function}" for further information.

5.11.2 Power management - assign to equipment

Notes

You must have administrator access rights to create or modify a profile.

Overview

In this section the administrator assigns the power management profiles created in "Administration → Power Management → Create, Edit, Delete" to each machine (see chapter 5.11.1 – "Power Management - create, edit, delete").

How to filter equipment

By filtering the fleet, brand, and/or type columns, the administrator can assign multiple power management profiles at a time.

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	☐ Cold planner	
☒	BF 800 C - 71 1003	BOMAG	BOMAG	☐ Paver	
☒	BF 800 C - 71 1004	BOMAG	BOMAG	☐ Recycler	
☒	BF 800 C - 71 1011	BOMAG	BOMAG	☐ Refuse Compactor	
☒	BF 800 C - 71 1013	BOMAG	BOMAG	☐ Single Drum Roller	
☒	BF 800 C - 71 1015	BOMAG	BOMAG	☐ Tandem Roller	
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	☐
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	☐

Save changes Undo

- From the drop down menu under the fleet, brand and/or type column headers, tag or untag the check box to select or deselect a criterion.
- OR click on “All”.
- Click on “Apply”.

Once you clicked on “Apply”, the drop down menu automatically closes.

- If you wish to close the drop-down menu without applying changes, click on the “Close” button.

How to assign power management profiles to equipment

To assign a power management profile to one or more (but not all) machines

Configuration: Equipment Power Management - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐					
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	Paver	Power Management
☒	BF 800 C - 71 1003	BOMAG	BOMAG	Paver	Power Management
☒	BF 800 C - 71 1004	BOMAG	BOMAG	Paver	Power Management
☒	BF 800 C - 71 1011	BOMAG	BOMAG	Paver	Power Management
☒	BF 800 C - 71 1013	BOMAG	BOMAG	Paver	Power Management
☒	BF 800 C - 71 1015	BOMAG	BOMAG	Paver	Power Management
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	Power Management
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1015	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1016	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1017	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1018	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1021	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1022	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1027	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 500/15 - 00 1028	BOMAG	BOMAG	Cold planner	Power Management
☒	BM 600/15 - 10 1001	BOMAG	BOMAG	Cold planner	Power Management
☒	BW 120 AD-4 - 08 1677	BOMAG	BOMAG	Tandem Roller	Power Management
☒	BM 450 AD-4 AM - 02 1003	BOMAG	BOMAG	Tandem Roller	Power Management

Save changes Undo

- Select the machines by tagging the corresponding check boxes.
- Select a profile name from the drop down menu.
- Click on the “SET” button
- To cancel selections, click on the “Undo” button.
- Click on “Save changes”.

To assign a power management profile to all machines

- Filter the machines.
- Select the machines by tagging the check boxes to the left of each machine name.

Administration

Configuration: Equipment Power Management - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					SET
NO FILTER		NO FILTER	NO FILTER	NO FILTER	NO FIL
☒	BF 850 C - 66 1008	BOMAG Allonsine II BOMAG Rental	BOMAG	Paver	Power

- Tag the check box in the header of the first column and press “SET”.
- Select a profile name in the header of the profile column and press “SET”.

Save changes	Undo
--------------	------

- To cancel selections click on the “Undo” button and wait a few seconds for the application to refresh the screen.
- Click on “Save changes”
- Click on “Ok” to confirm changes.

5.12 Administration - Input/Output

5.12.1 Input/output - create, edit, delete


Note

You must have administrator access rights to create or modify settings.

Overview

In this section the administrator and users can create different Input/Output profiles. The profiles created will be assigned to the machines in the “Administration → Input/Output - Assign to Equipment” section (see chapter 5.12.2 – “Input/output – assign to equipment”).

The panel on the left, “Items list - Profiles Equipment Input/Output” will be the only panel you see on your screen, until you create and save at least one “Input/Output” profile.

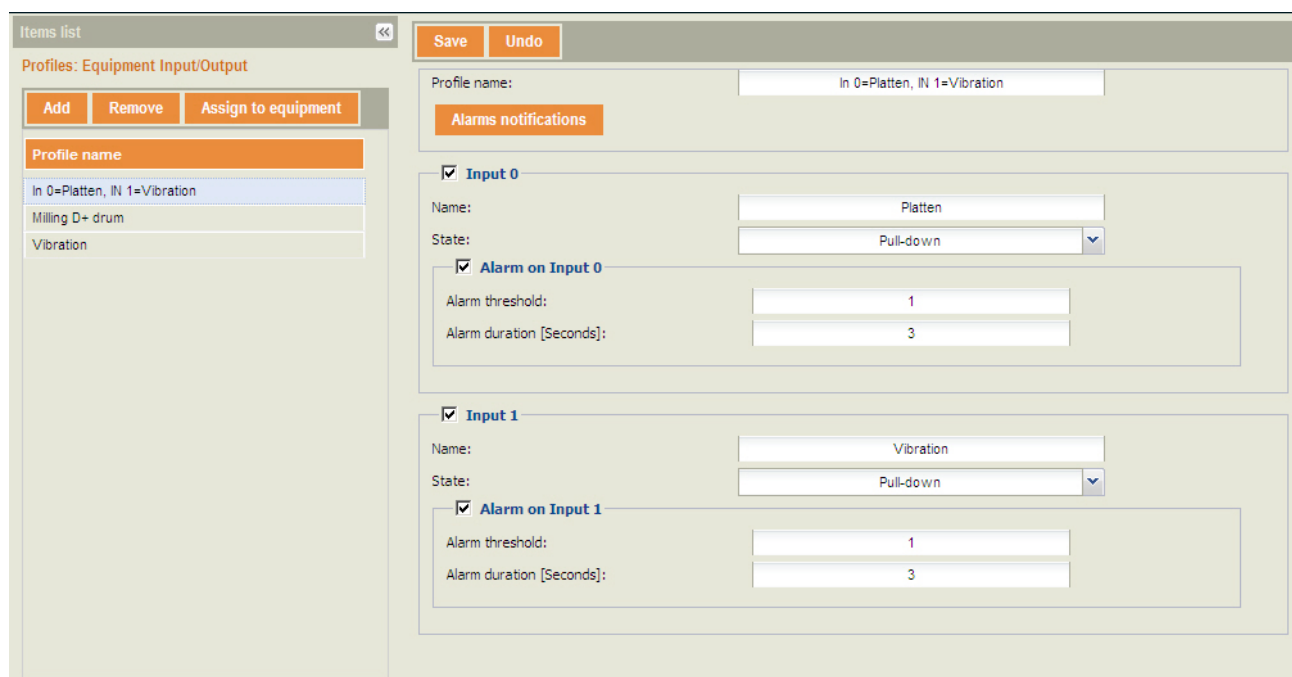

Items list

The panel displays current profile names as well as buttons for creating or removing an Input/Output profile

Details

Here you create or modify information about each machine’s Input/Output profile and, using the “Alarms notifications” function, manage the alarm policy for the current Input/Output profile by adding, editing, deleting and assigning system users and/or external users to a notification group.

How to add & configure a new input/output profile

To add a new profile

- Click on the “Add” button in the “Items list”.

A profile configuration table will appear on the right.


- Enter the input/output profile name in the text box to the right of “Profile name”.

A new line will be added to the top of the “Items list”.


In the panel on the right:

- Click on the check box to the left of Input 0 or Input 1.
- Click on the name of the selected input. (The name should help you to remember the device or function connected with the selected input.)
- Select the input state from the “State” drop down menu by clicking on it. The drop down menu offers three options:
 - o Pull-down: Select the “Pull-down” option to read a switch connected to power (voltage from 5 to 32 Vdc) when closed.

• PULL-DOWN

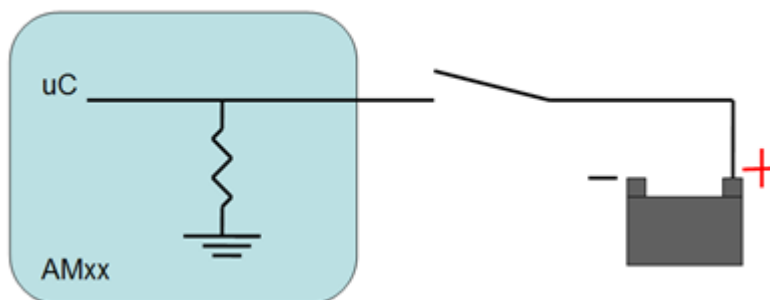

- o Pull-up: Select the “Pull-up” option to read a switch connected to GND when closed

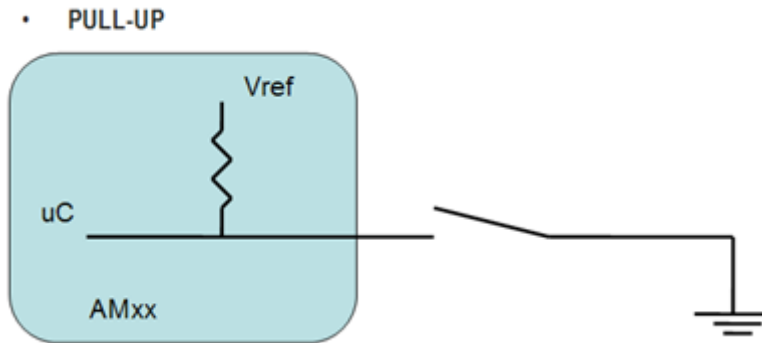

- o Push-Pull: Select the “Push-Pull” option to read a digital input (an input can range from 0 Vdc to 32 Vdc).

① Notes

When selecting this option the digital hardware input is Low (0) when the external voltage is less than 4 Vdc and High (1) when the external voltage is higher than 6 Vdc.

The push-pull logic is similar to *tpPull-up*. The only difference is that with Push-pull there is no switch, but there is a voltage value. On = voltage value <1,0V and Off = voltage value >1,5V.

- Click on “Save”.

A “Save process completed successfully” message is displayed confirming that your data have been saved.

- Repeat above steps for input 1.

How to add an alarm profile for input 0 (or input 1)

- Tag the check box to the left of “Alarm on Input 0”.
- Alarm threshold: Enter the Alarm threshold value. When selecting a digital input, the only valid values are “1” and “0”. If the Alarm threshold value is set to “1” an alarm is detected whenever the digital input goes High. If the Alarm threshold value is set to “0” an alarm is detected when the digital input goes Low.

Administration


- Alarm duration [Second]: Enter the alarm duration value (in seconds). An alarm condition is detected if its duration in time is at least equal to the selected alarm duration value.
- Click on “Save”

A “Save process completed successfully” message is displayed to the right of the “Undo” button confirming that your data have been saved.

- Repeat the above steps for Input 1.

How to remove an existing input/output profile

To remove a profile

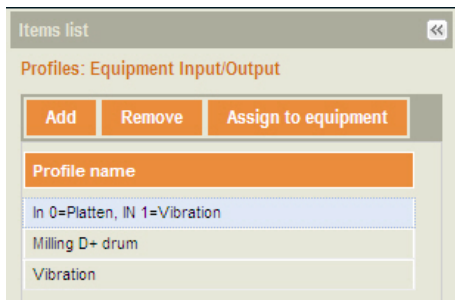

- Select the profile name that you wish to remove from the “Items list”.
- Click on the “Remove” button.
- Click on the “Yes” button in the “Confirm deletion” text box.

The profile is immediately removed from the “Items list”.

How to setup alarm notifications

Using the “Notification groups [Edit] function” enables the administrator AND user (by GeoFence) to add or remove alarm notification groups and add, edit, delete and assign system users and external users to/from each “Notification group”.

See chapter 5.15- “ (Alarm) “Notification groups [Edit]” function” for further information.

5.12.2 Input/output – assign to equipment

① Notes

You must have administrator access rights to create or modify a maintenance profile.

Overview

In this section the administrator assigns the input/output profiles created in “Administration→Input/Output→Create, Edit, Delete” to each machine or groups of machines (see chapter 5.12.1 – “Input/output - create, edit, delete”).

How to filter equipment

By filtering the fleet, brand, and/or type columns, the administrator can assign multiple input/output profiles at a time.

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG		
☒	BF 800 C - 71 1003	BOMAG	BOMAG		
☒	BF 800 C - 71 1004	BOMAG	BOMAG		
☒	BF 800 C - 71 1011	BOMAG	BOMAG		
☒	BF 800 C - 71 1013	BOMAG	BOMAG		
☒	BF 800 C - 71 1015	BOMAG	BOMAG		
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	☐
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	☐

☐ Cold planner
☐ Paver
☐ Recycler
☐ Refuse Compactor
☐ Single Drum Roller
☐ Tandem Roller

- From the drop down menu under the fleet, brand and/or type column headers, tag or untag the check box to select or deselect a criterion.
- OR click on “All”.
- Click on “Apply”.

Once you clicked on “Apply”, the drop down menu automatically closes.

- If you wish to close the drop-down menu without applying changes, click on the “Close” button.

How to assign an input/output profile to equipment

To assign an input/output profile to one or more (but not all) machines

Configuration: Equipment Input/Output - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	Paver	
☒	BF 800 C - 71 1003	BOMAG	BOMAG	Paver	
☒	BF 800 C - 71 1004	BOMAG	BOMAG	Paver	
☒	BF 800 C - 71 1011	BOMAG	BOMAG	Paver	
☒	BF 800 C - 71 1013	BOMAG	BOMAG	Paver	
☒	BF 800 C - 71 1015	BOMAG	BOMAG	Paver	
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	Milling
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	Milling
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	Milling
☒	BM 500/15 - 00 1015	BOMAG	BOMAG	Cold planner	Milling
☒	BM 500/15 - 00 1016	BOMAG	BOMAG	Cold planner	Milling
☒	BM 500/15 - 00 1017	BOMAG	BOMAG	Cold planner	Milling
☒	BM 500/15 - 00 1018	BOMAG	BOMAG	Cold planner	Milling

- Select the machines by tagging the check boxes to the left of each machine name.
- Select a profile name from the drop down-menu in the profile column.
- Click the “SET” button located in the profile column.
- To cancel selections, click on the “Undo” button.

Administration

- Click on “Save changes”.

To assign an input/output profile to all machines

- Filter the machines.
- Select the machines by tagging the check boxes to the left of each machine name.

Configuration: Equipment Input/Output - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FIL
☒	BF 800 C - 66 1008	BOMAG Allonsine II BOMAG Rental	BOMAG	Paver	

- Tag the check box in the header of the first column and click on “SET”.
- Select a profile name in the header of the profile column and click on “SET”.

Save changes	Undo
--------------	------

- To cancel selections click on the “Undo” button and wait a few seconds for the application to refresh the screen.
- Click on “Save changes”
- Click on “Ok” to confirm changes.

5.13 Administration - Curfew

5.13.1 Curfew - create, edit, delete

Notes

You must have administrator access rights to create or modify a Curfew profile.

Overview

In this section the administrator or operational user can create, edit or delete a “Curfew profile” for each machine in the fleet.

The profile created will be assigned to the machine in “Administration→ Curfew → Assign to equipment” (see chapter 5.13.2 - Curfew - assign to equipment).

Items list

The panel displays a list of existing machine(s) that have already been set up with “Curfew profiles” as well as buttons for creating a new or removing a “Curfew”.

Details

Here the administrator creates, edits or deletes a Curfew profile and, using the “Alarms notifications” function, manage the alarm policy for the current curfew profile by adding, editing, deleting and assigning system users and/or external users to a notification group

How to add a new curfew profile

The screenshot shows the 'Details' panel for adding a new curfew profile. The panel has a left sidebar with 'Items list' and 'Details' tabs. The 'Details' tab is active, showing a 'Profile name' input field, a 'Time Zone' dropdown set to '(GMT) Greenwich Mean', and a 'Save' button. Below the input fields is a grid showing curfew periods for Monday through Friday from 07:00 to 16:00. The grid has columns for each day of the week and rows for each hour. The curfew period is highlighted in yellow for Monday through Friday from 07:00 to 16:00.

- Click on the “Add” button in the “Items list”.
- In the “Details” panel, enter a profile name and double check that the time zone is correct.

Note

The default time zone is the user's time zone as set in “Administration → User Settings”.

- Click on “Save”.

The system confirms that the “Save” process has successfully completed. Your new profile name will be added to the “Items list”.


To set curfew periods

The screenshot shows the 'Details' panel for setting curfew periods. The panel has a left sidebar with 'Items list' and 'Details' tabs. The 'Details' tab is active, showing a grid with columns for each day of the week and rows for each hour. The curfew period is highlighted in yellow for Monday through Friday from 07:00 to 16:00. The grid has columns for each day of the week and rows for each hour. The curfew period is highlighted in yellow for Monday through Friday from 07:00 to 16:00.

- Select the Profile name you wish to set Curfew periods for in the “Items list”.
- In the time column, locate the time you wish to start the Curfew period. Move your mouse across the screen (on the light blue line) until you are under the work day. Click in the cell.

The cell turns yellow and the Curfew time period is displayed.


- To extend the Curfew time period, move your mouse to the right side of the yellow cell, until your pointer turns into an up/down (↑↓) arrow. Click and drag the arrow down to the time, when the Curfew period should come to an end.

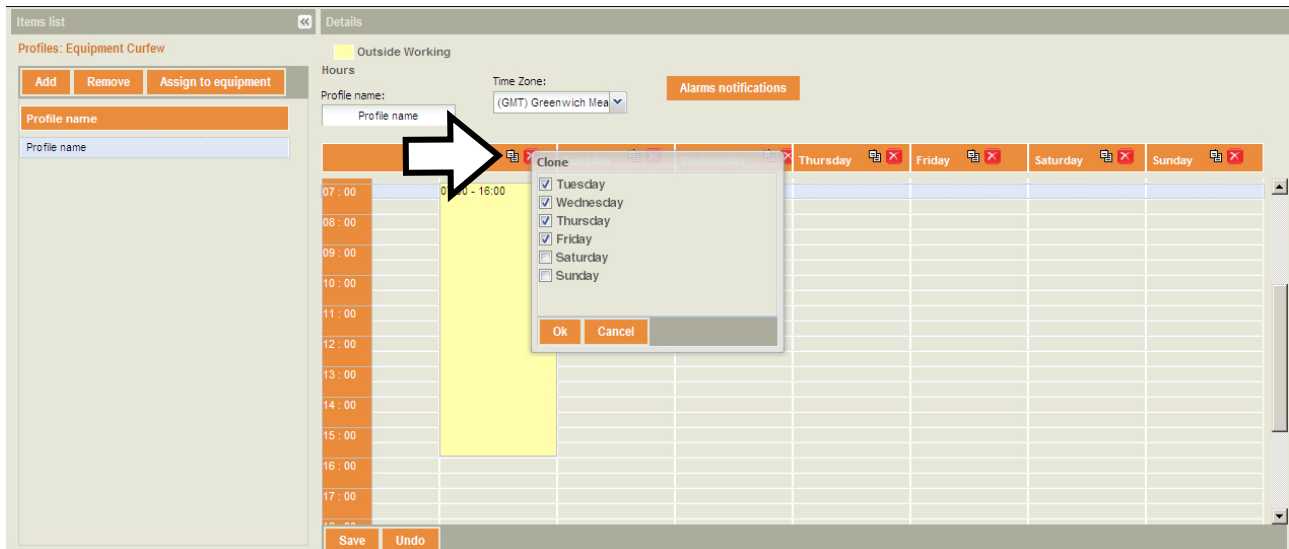

- To clone the same Curfew time period for other days, click on the “Clone” button


The “Clone” screen is displayed.

- Tag any or all of the check boxes to the left of each day you wish to clone, then click on the “Ok” button. The “Curfew” periods are immediately displayed.

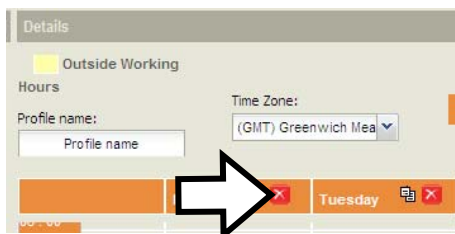

- To remove all “Curfew” periods inserted in a day, just click on the “Delete” button, then click on “Yes” to confirm deletion.
- Click on the “Save” button.
- Click on the “Undo” button to return to the last saved Curfew periods.

How to remove a “Curfew profile”

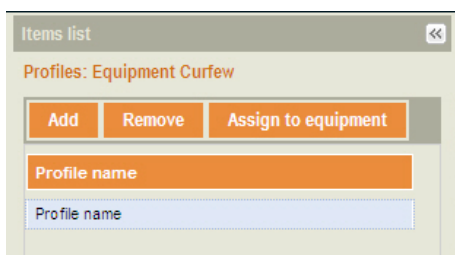

- Select the profile name you wish to remove in the “Items list”.

Administration

- Click on the “Remove” button.
- Confirm item deletion by clicking on “Yes”.

How to setup alarm notifications

Using the “Notification groups [Edit] function” enables the administrator AND user (by GeoFence) to add or remove alarm notification groups and add, edit, delete and assign system users and external users to/from each Notification group.

See chapter 5.15- “ (Alarm) “Notification groups [Edit]” function” for further information.

5.13.2 Curfew - assign to equipment

① Notes

You must have administrator access rights to create or modify settings.

Overview

In this section the administrator can assign, to each machine, a Curfew profile created in the “Administration→Curfew→Create, Edit, Delete” section (see chapter 5.13.1 - “Curfew - create, edit, delete”).

How to filter equipment

By filtering the fleet, brand, and/or type columns, the administrator can assign multiple “Curfew profiles” at a time.

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	☐ Cold planner	
☒	BF 800 C - 71 1003	BOMAG	BOMAG	☐ Paver	
☒	BF 800 C - 71 1004	BOMAG	BOMAG	☐ Recycler	
☒	BF 800 C - 71 1011	BOMAG	BOMAG	☐ Refuse Compactor	
☒	BF 800 C - 71 1013	BOMAG	BOMAG	☐ Single Drum Roller	
☒	BF 800 C - 71 1015	BOMAG	BOMAG	☐ Tandem Roller	
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	☐
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	☐
☐	BM 500/15 - 00 1015	BOMAG	BOMAG	Cold planner	☐

- From the drop down menu under the fleet, brand and/or type column headers, tag or untag the check box to select or deselect a criterion.
- OR click on “All”.
- Click on “Apply”.

Once you have clicked on “Apply”, the drop down menu automatically closes.

- If you wish to close the drop-down menu without applying changes, click the “Close” button.

How to assign “Curfew” profiles to equipment

To assign a “Curfew” profile to one or more (but not all) machines

Configuration: Equipment Curfew - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	Paver	Curfew1
☒	BF 800 C - 71 1003	BOMAG	BOMAG	Paver	Curfew1
☒	BF 800 C - 71 1004	BOMAG	BOMAG	Paver	Curfew1
☒	BF 800 C - 71 1011	BOMAG	BOMAG	Paver	Curfew1
☒	BF 800 C - 71 1013	BOMAG	BOMAG	Paver	Curfew1
☒	BF 800 C - 71 1015	BOMAG	BOMAG	Paver	Curfew1
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	Curfew1
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	Curfew1
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	Curfew1
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	Curfew1
☒	BM 500/15 - 00 1015	BOMAG	BOMAG	Cold planner	Curfew1
☒	BM 500/15 - 00 1016	BOMAG	BOMAG	Cold planner	Curfew1
☒	BM 500/15 - 00 1017	BOMAG	BOMAG	Cold planner	Curfew1
☒	BM 500/15 - 00 1018	BOMAG	BOMAG	Cold planner	Curfew1

- Select the machines by tagging the check boxes to the left of each machine name.
- Select a profile name from the drop down menu in the profile column.
- Click on the “SET” button located in profile column.
- To cancel selections, click on the “Undo” button
- Click on the “Save changes” button.

To assign a “Curfew” profile to all machines

- Filter the machines.
- Select the machines by tagging the check boxes to the left of each machine name.

Configuration: Equipment Curfew - 30 Results

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG Allonsine II BOMAG Rental	BOMAG	Paver	Curfew1

- Tag the check box in the header of the first column and click on “SET”.
- Select a profile name in the header of the profile column and click on “SET”.

- To cancel selections click on the “Undo” button and wait a few seconds for the application to refresh the screen.
- Click on “Save changes”
- Click on “Ok” to confirm changes.

5.14 Administration - Maintenance

5.14.1 Maintenance - administration

Note

You must have administrator access rights to modify maintenance administration profiles.


Tip: To resize column widths, move the mouse over the right column border in the column header and drag to the width you desire. (Your cursor will change to ).

Note

Please note that the system does not contain any BOMAG maintenance plans. To be able use this feature you should create your own maintenance plans by referring to the maintenance instructions for your machine.

Overview

In this section the administrator can quickly view the maintenance status of the fleet(s).

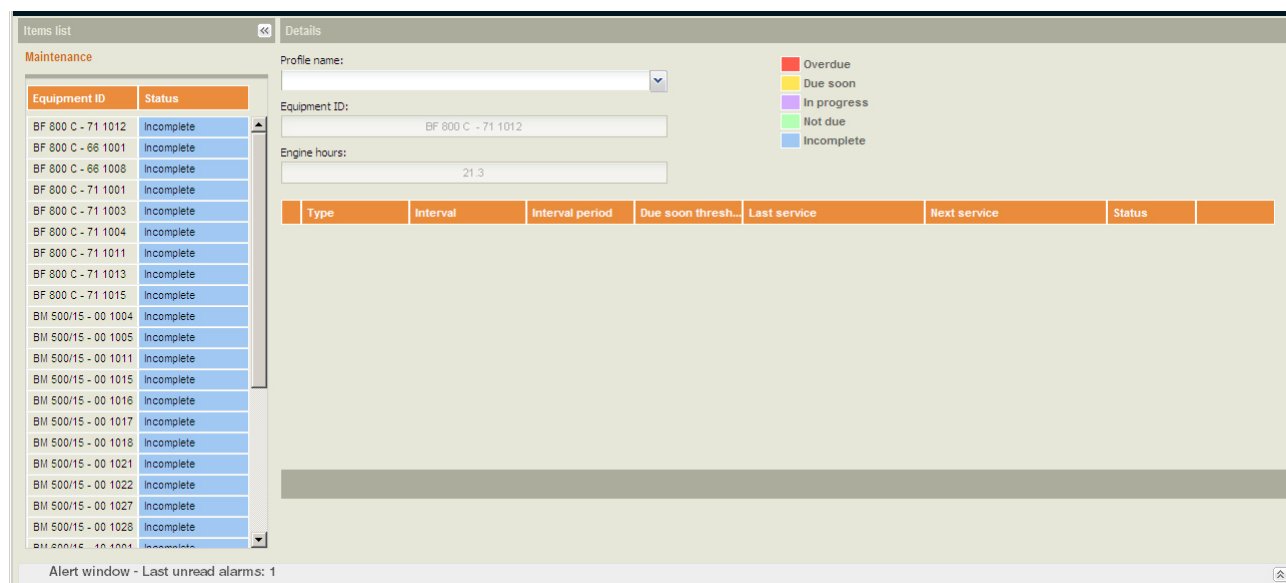

Items list

This panel shows a list of existing maintenance profiles and provides an “At A Glance” view of each machine’s maintenance status, e.g., Incomplete, Overdue, etc.

To filter data in this panel, refer to the “How to filter data in items list – maintenance panel”.

Details

This panel provides maintenance details for each machine.

To filter data in this panel, read further down “How to filter data in details panel”.

How to filter data in “Items list – maintenance”

You can filter data in the “Items list” by using the filters for column headers.

Scenario: You have multiple maintenance profiles and would like to see only the maintenance status for these machines using a specific profile:

- Move the mouse over the column header named “Profile”, then click the down arrow.
- Move your mouse down to “Filters” and over into the blank field.
- Enter the equipment ID.

The “Items list” will immediately be filled up with the machine data for that profile name.

- To close the drop down menu, click anywhere on your screen outside of the drop down menu.
- To return to the original “Items list” showing all profile names and respective data, deselect the check box “Filters”.

How to add information in “Details” panel

- You can add or hide columns in the table by using the column header filters.

How to activate & close service

The screenshot displays the BOMAG maintenance software interface. On the left, the 'Items list' panel shows a table of equipment with columns for Equipment ID and Status. The 'Details' panel on the right shows the selected equipment 'AM50-2 BobMcC - 1109 - SN49' with its engine hours (51.63) and a table of service intervals. The 'Timing Test hours' row is highlighted, and the 'Option List' button is visible.

Type	Interval	Interval period	Due soon threshold	Last service	Next service	Status
Timing Test hours	3	Engine hours	0 Engine hours	06/02/2009 at 21.26 engine hours and 0 Miles	-27 engine hours left at 24.26 projected engine hours	Overdue

- Select the machine name you wish to activate a service for in the “Items list”.

Note

A service can be activated if it is in one of the following states: Not due, Due soon, Overdue.

In the “Details” panel:

- Click on the “Options List” link.
- Click on “Activate”.

The screenshot shows the 'Active service' popup window. It has a text area for 'Notes' and 'Ok' and 'Cancel' buttons at the bottom.

- In the popup window enter any notes you wish to save in the data base.
- Click on “Ok”.

Administration

Items list - Maintenance

Equipment ID	Status
617-0002 AM50-2	Overdue
617-0117 - AM50 Re	Incomplete
AM50-2 BobMcC - 1...	In progress
AM50-2 Ron 1109-48	Overdue
AM50-2 Savage 63	Not due
DFALPHA AM25 #57...	Incomplete
VW MKV AM25 - SN1	Incomplete

Details

Profile name: Bob test 1

Equipment ID: AM50-2 BobMcC - 1109 - SN49

Engine hours: 51.63

Type	Interval	Interval period	Due soon threshold	Last service	Next service	Status	
Timing Test hours	3	Engine hours	0 Engine hours	06/01/2010 at 51.63 engine hours and 462 Miles	N/A	In progress	Option List

Save process completed successfully

As shown above, the status in the “Items list – Maintenance” panel has changed from “Not due” to “In Progress”.

How to close service

Items list - Maintenance

Equipment ID	Status
617-0002 AM50-2	Overdue
617-0117 - AM50 Re	Incomplete
AM50-2 BobMcC - 1...	In progress
AM50-2 Ron 1109-48	Overdue
AM50-2 Savage 63	Not due
DFALPHA AM25 #57...	Incomplete
VW MKV AM25 - SN1	Incomplete

Details

Profile name: Bob test 1

Equipment ID: AM50-2 BobMcC - 1109 - SN49

Engine hours: 51.63

Type	Interval	Interval period	Due soon threshold	Last service	Next service	Status	
Timing Test hours	3	Engine hours	0 Engine hours	06/01/2010 at 51.63 engine hours and 462 Miles	N/A	In progress	Option List Close service Change threshold

Save process completed successfully

- In the “Items list”, click on the machine name you wish to close service for.
- A service can be closed if it has been opened before, so if the status is “In progress”.

In the “Details” panel:

- Click on the “Options List” link.
- Click on “Close service”.

Close service

Close service date: 06/02/2010

Engine hours: 51.63 Mileage [Miles]: 462 Cost [\$]: 0

Notes:

OK Cancel

In the pop-up window:

Note

Values shown above are automatically filled in by the system. You may change any of the values.

- Close service date: If the date is different from the current date shown, click the calendar-icon to select a new date.
- Engine hours: To change, simply highlight the value and enter a new value.
- Mileage [Miles]: To change, simply highlight the value and enter a new value.
- Cost: Enter any cost associated with the service. Numeric format: 0.00. The currency depends on the Company's currency.
- Notes: Enter any notes you wish to save in the data base.
- Click on the “Ok” button.

Items list - Maintenance

Equipment ID	Status
617-0002 AM50-2	Overdue
617-0117 - AM50 Re...	Incomplete
AM50-2 BobMcC - 1	Not due
AM50-2 Ron 1109-48	Overdue
AM50-2 Savage 63	Not due
DFALPHA AM25 #57...	Incomplete
VW MKV AM25 - SN1	Incomplete

Details

Profile name: Bob test 1

Equipment ID: AM50-2 BobMcC - 1109 - SN49

Engine hours: 51.63

Type	Interval	Interval period	Due soon threshold	Last service	Next service	Status	
Timing Test hours	3	Engine hours	0 Engine hours	06/01/2010 at 51.63 engine hours and 462 Miles	3 engine hours left at 54.63 projected engine hours	Not due	Option List

Save process completed successfully

As shown above, the *Status* in the “Items list - Maintenance” panel has changed from “In Progress” to “Not due” and the same is reflected in the “Details” panel.

At the bottom of the “Details” panel, the application confirms that all data has been successfully saved in the database.

How to edit due soon thresholds in “Details” panel

Items list - Maintenance

Equipment ID	Status
BF 800 C - 71 1011	Incomplete
BF 800 C - 71 1013	Incomplete
BF 800 C - 71 1015	Incomplete
BM 500/15 - 00 1004	Incomplete
BM 500/15 - 00 1005	Incomplete
BM 500/15 - 00 1011	Incomplete
BM 500/15 - 00 1015	Incomplete
BM 500/15 - 00 1016	Incomplete
BM 500/15 - 00 1017	Incomplete
BM 500/15 - 00 1018	Incomplete
BM 500/15 - 00 1021	Incomplete
BM 500/15 - 00 1022	Incomplete
BM 500/15 - 00 1027	Incomplete
BM 500/15 - 00 1028	Incomplete
BM 600/15 - 10 1001	Incomplete
BW 120 AD-4 - 08 ...	Incomplete
BW 154 AD-4 AM - ...	Incomplete
BM 154 AD-4 AM - ...	Incomplete

Details

Profile name: Oil service

Equipment ID: BM 500/15 - 00 1017

Engine hours: 220.25

Type	Inte...	Interval period	Due soon threshold	Last service	Next service	Status	
Oil service	500	Engine hours	50 Engine hours			Not defined	Option List

Type Description:
Interval: 500 Engine hours


Last service
Change threshold

- Select the machine you wish to edit from the “Items list”.

In the “Details” panel:

Administration


- Click on the “Options List” link for the service you wish to edit.
- Click on “Change threshold”.

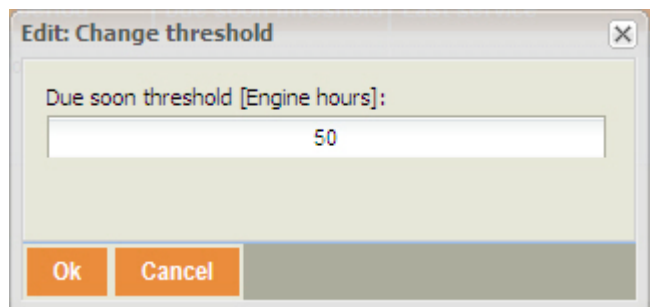

A dialog box titled "Edit: Change threshold" with a close button (X) in the top right corner. It contains a label "Due soon threshold [Engine hours]:" followed by a text input field containing the value "50". At the bottom, there are two buttons: "Ok" and "Cancel".

- In the popup window, enter the new value for engine hours, days, months, miles or km (depending on the service type) for the “Due soon threshold”.
- Click on the “Ok” button.

How to view status details of a machine

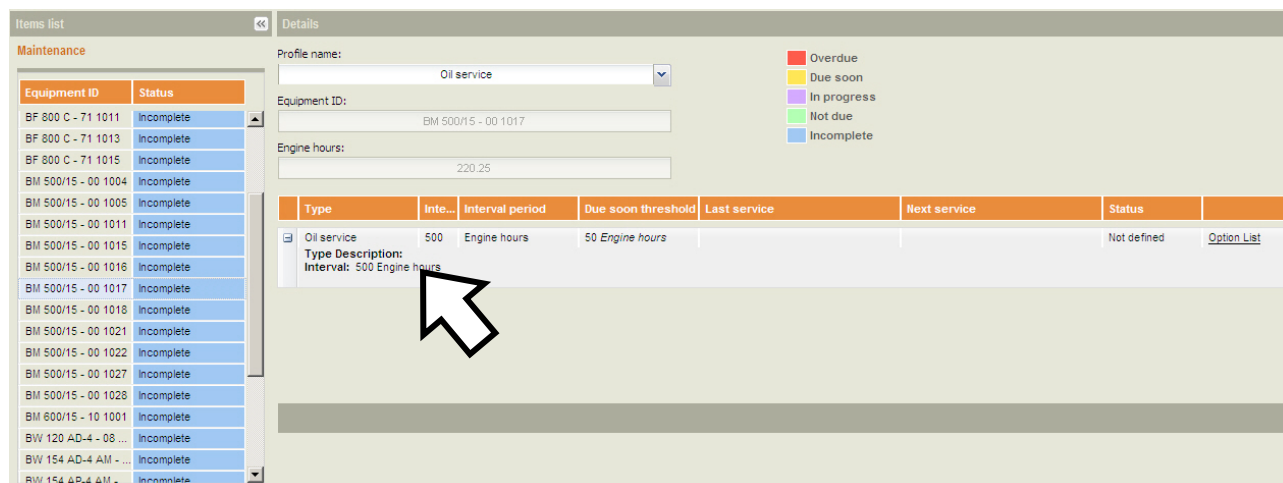

The screenshot shows a software interface for machine maintenance. On the left is the "Items list" panel with a table of machines. The "Details" panel on the right shows information for a selected machine, including a profile name, equipment ID, engine hours, and a table of maintenance types. A mouse cursor points to the "Type Description" field in the maintenance types table.

Equipment ID	Status
BF 800 C - 71 1011	Incomplete
BF 800 C - 71 1013	Incomplete
BF 800 C - 71 1015	Incomplete
BM 500/15 - 00 1004	Incomplete
BM 500/15 - 00 1005	Incomplete
BM 500/15 - 00 1011	Incomplete
BM 500/15 - 00 1015	Incomplete
BM 500/15 - 00 1016	Incomplete
BM 500/15 - 00 1017	Incomplete
BM 500/15 - 00 1018	Incomplete
BM 500/15 - 00 1021	Incomplete
BM 500/15 - 00 1022	Incomplete
BM 500/15 - 00 1027	Incomplete
BM 500/15 - 00 1028	Incomplete
BM 600/15 - 10 1001	Incomplete
BW 120 AD-4 - 08 ...	Incomplete
BW 154 AD-4 AM - ...	Incomplete
BW 154 AD-4 AM - ...	Incomplete

Details panel:

Profile name: Oil service

Equipment ID: BM 500/15 - 00 1017

Engine hours: 220.25

Type	Inte...	Interval period	Due soon threshold	Last service	Next service	Status	
☒ Oil service	500	Engine hours	50 Engine hours			Not defined	Option List

Type Description:
Interval: 500 Engine hours

- Select the machine you wish to edit in the “Items list”.
- In the “Details” panel, click on the “+” sign to expand each maintenance type. A more detailed description of type and interval period is displayed.
- To hide details click on the “-“ sign.

5.14.2 Maintenance - create, edit, delete

Note

You must have administrator access rights to create or modify Maintenance profiles.


To close this screen, click on the “X” in the upper right corner or press the Esc key.

Tip: To resize column widths, move the mouse over the right column border in the column header and drag to the width you desire. (Your cursor will change to )

Overview

In this section the administrator will create equipment maintenance profiles, which match the type of maintenance that will be applied to a machine, or groups of machines in the “Administration → Maintenance → Assign to equipment” section (see chapter 5.14.3 – “Maintenance – assign to equipment”).

A maintenance profile represents a set of maintenance services.

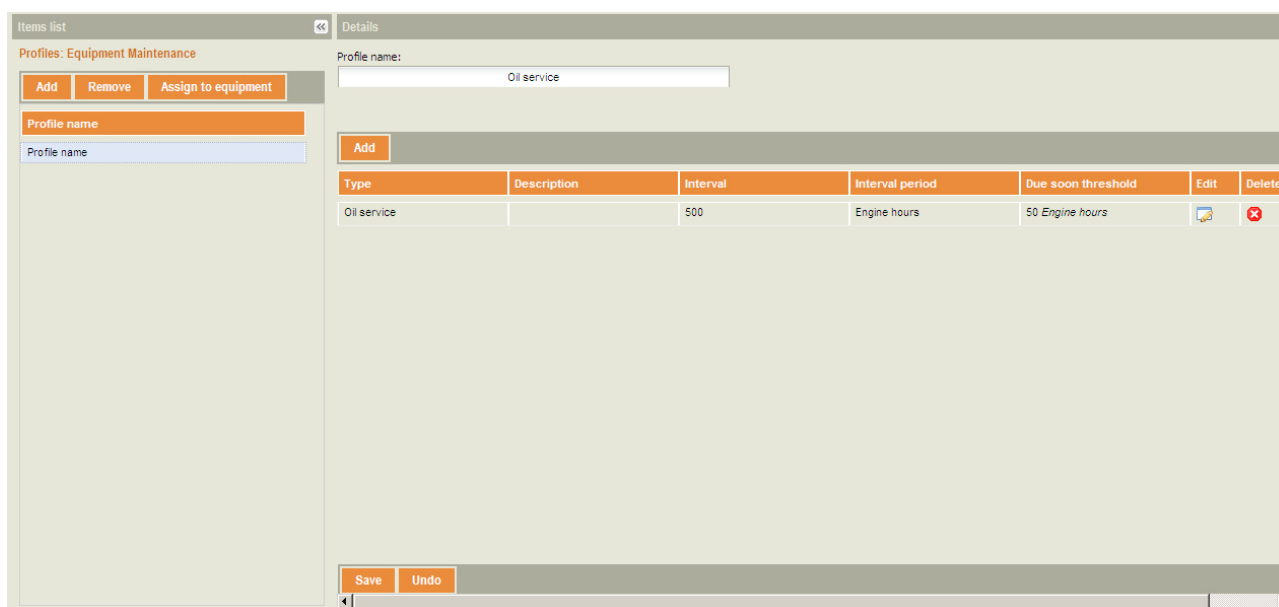

Type	Description	Interval	Interval period	Due soon threshold	Edit	Delete
Oil service		500	Engine hours	50 Engine hours		

Items list

This panel shows a list of existing equipment maintenance profiles, which have already been set up. The “Add” and “Remove” buttons are also located here.

Details

Here you create, edit or remove equipment maintenance profiles.

How to create equipment maintenance profile & add a new “Type”

The screenshot shows the 'Equipment Maintenance' interface. On the left is the 'Items list' panel with buttons 'Add', 'Remove', and 'Assign to equipment'. The main area is the 'Details' panel for a profile named 'Oil service'. It includes a 'Profile name' field with the value 'Oil service' and an 'Add' button. Below this is a table with the following data:

Type	Description	Interval	Interval period	Due soon threshold	Edit	Delete
Oil service		500	Engine hours	50 Engine hours		

At the bottom of the 'Details' panel are 'Save' and 'Undo' buttons.

- Click on the “Add” button in the “Items list”.
- In the “Details” panel (on the right):
- Enter a “Profile name”.
 - Click on the “Add” button (under “Profile name”).

The 'Add' dialog box contains the following fields and buttons:

- Type:** A dropdown menu.
- Add Type** and **Delete Type** buttons.
- Name:** A text input field.
- Interval type:** A dropdown menu with 'Engine Hours' selected.
- Description:** A text input field.
- Interval [Engine hours]:** A text input field with the value '500'.
- Due soon threshold [Engine hours]:** A text input field with the value '50'.
- Ok** and **Cancel** buttons at the bottom.

- Click on the “Add Type” button.

- You have three (3) add-type options to select from; “Engine Hours”, “Calendar Time: Days/Months”, and “Distance: Km/Miles”.

Set-up an “Engine Hours” based maintenance service

- Interval type: Select “Engine Hours” from the drop down menu”.
- Name: Enter a name for the new maintenance service type based on Engine Hours, e.g., oil change.
- Description: Enter a description for the new maintenance service type.
- Interval [Engine hours]: Enter a numeric value into the “Interval [Engine hours]:” text field.
- Due soon threshold (Engine Hours): Enter a numeric value.
- By default, this value is set to 50 engine hours before service is due.

Note

When the threshold is reached, the system generates a medium priority alarm (orange icon in the alert window) to inform the user that service is due soon.

- Click on “Ok”.

Set-up calendar time: Days/Months

- Interval type: Select “Calendar time: Days/Months” from the drop down menu.
- Name: Enter a name for the new maintenance service type based on a calendar, e.g., oil change.
- Description: Enter a description for the new maintenance service type.
- Date interval: Enter a numeric value.
- Date format: Select either days or months by clicking on one or the other.
- Due soon threshold (days): Enter a numeric value. By default, this value is set to 14 days before the service date.

Note

When the threshold is reached, the system generates a medium priority alarm (orange icon in the alert window) to inform the user that service is due soon.

The system also generates a high priority alarm (red icon in the alert window) to inform the user that service is over due. This alarm occurs when the interval since the last service is elapsed.

- Click on “Ok”.

Set-up distance: Km/Miles

- Interval type: Select “Distance: Km/Miles” from the drop down menu
- Name: Enter a name for the new maintenance service type based on a distance.
- Description: Enter a description for the new maintenance service type.
- Interval [miles or km]: Enter a numeric value. The unit of measurement depends on the user settings.
- Due soon threshold [miles or km]: Enter a numeric value. The unit of measurement depends on the user settings. By default, this value is set to 150 km/93 miles before the service date.

① Note

When the threshold is reached, the system generates a medium priority alarm (orange icon in the alert window) to inform the user that service is due soon.

The system also generates a high priority alarm (red icon in the alert window) to inform the user that service is over due.

- Click on “Ok”.


Type	Description	Interval	Interval period	Due soon threshold	Edit	Delete
Oil service		500	Engine hours	50 Engine hours		

At that point the new maintenance service type has been saved and it is available for future use in other maintenance profiles.

- Click on “Save”.

The application immediately confirms that the new maintenance profile has been saved (center bottom) and the new profile name appears in the “Items list”.

How to edit a maintenance “Service” in a maintenance “Profile”

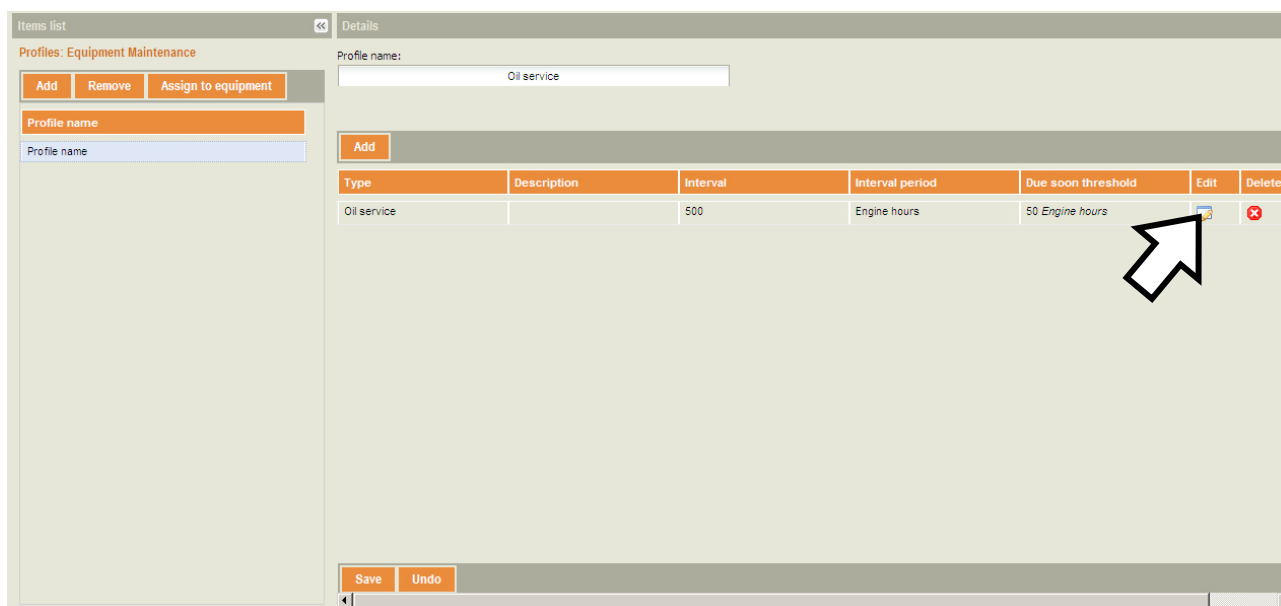

Items list << Details

Profiles: Equipment Maintenance

Add Remove Assign to equipment

Profile name

Profile name

Profile name

Oil service

Add


Type	Description	Interval	Interval period	Due soon threshold	Edit	Delete
Oil service		500	Engine hours	50 Engine hours		

Save Undo

- Select the profile name from the “Items list”.
- In the “Details” panel, press the “Edit” icon for the maintenance service you want to edit.
- In the pop-up screen, select or enter a new value in any of the fields you wish to change.
- Click on the “Ok” button. Your changes are immediately recognized.
- Click on “Save”.

The application confirms that your changes have been saved. The changes in a profile will be applied to any user who is using the profile.

How to delete a maintenance “Service” in a maintenance “Profile”

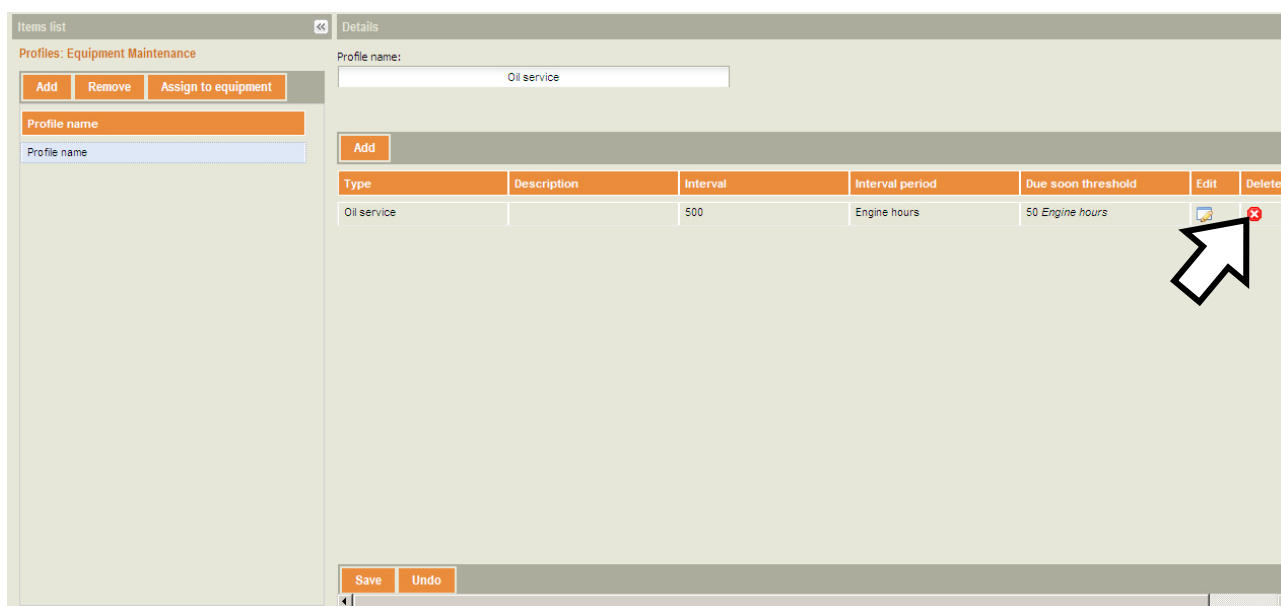

Items list << Details

Profiles: Equipment Maintenance

Add Remove Assign to equipment

Profile name

Profile name

Profile name

Oil service

Add

Type	Description	Interval	Interval period	Due soon threshold	Edit	Delete
Oil service		500	Engine hours	50 Engine hours		

Save Undo

- Select the profile name from the the “Items list”.

Administration


- In the “Details” panel, press the “Delete” icon for the maintenance service you wish to delete.
- Click on the “Yes” button in the “Confirm item deletion” screen.

If the type is not used by any machine, the service “Type” is immediately removed from the “Type” list for the profile name you had selected.

- Click on “Save”.

The application immediately confirms that your changes have been saved.

How to remove a profile

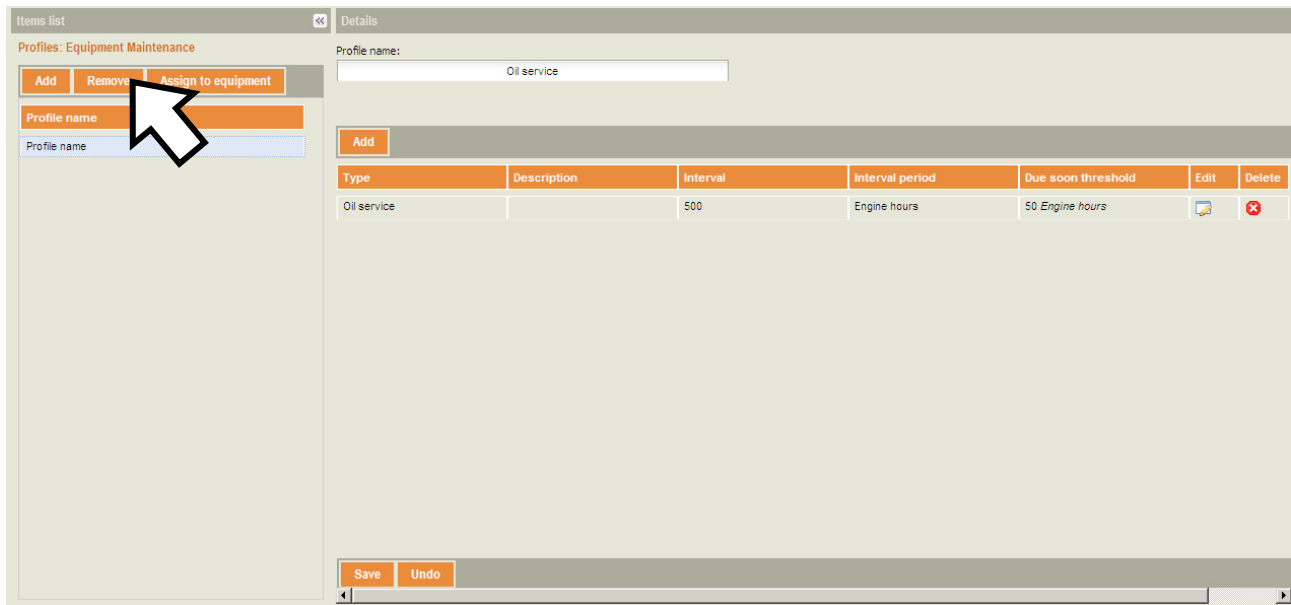

- Select the Profile name you wish to remove from the “Items list”.
- Click on the “Remove” button.
- Click on the “Yes” button in the “Confirm item deletion” screen. The “Profile name” you selected is removed from the “Items list”, if it is not assigned to any machine.

How to add information in the “Details” panel

You can add further columns by using the column header filters.

5.14.3 Maintenance – assign to equipment

Note

You must have administrator access rights to create or modify a maintenance profile.

Overview

In this section the administrator assigns the maintenance profiles created in “Administration → Maintenance → Create, Edit, Delete” to each machine or groups of machines (see chapter 5.14.2 – “Maintenance - create, edit, delete”).

How to filter equipment

By filtering the fleet, brand, and/or type columns, the administrator can assign multiple alarm profiles at a time.

Selected	Equipment ID	Fleet	Brand	Type	BOMAG
☐ SET					☐ SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BF 800 C - 66 1008	BOMAG	BOMAG	☐ Cold planner ☐ Paver ☐ Recycler ☐ Refuse Compactor ☐ Single Drum Roller ☐ Tandem Roller	
☒	BF 800 C - 71 1003	BOMAG	BOMAG		
☒	BF 800 C - 71 1004	BOMAG	BOMAG		
☒	BF 800 C - 71 1011	BOMAG	BOMAG		
☒	BF 800 C - 71 1013	BOMAG	BOMAG		
☒	BF 800 C - 71 1015	BOMAG	BOMAG		
☒	BF 800 C - 71 1012	BOMAG	BOMAG	Paver	☐
☒	BM 500/15 - 00 1004	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1005	BOMAG	BOMAG	Cold planner	☐
☒	BM 500/15 - 00 1011	BOMAG	BOMAG	Cold planner	☐

Save changes Undo

- From the drop down menu under the fleet, brand and/or type column headers, tag or untag the check box to select or deselect a criterion.
- OR click on “All”.
- Click on “Apply”.

Once you have clicked on “Apply”, the drop down menu automatically closes.

- If you wish to close the drop-down menu without applying changes, click on the “Close” button.

How to assign a maintenance profile to equipment

To assign a maintenance profile to one or more (but not all) machines:

Selected	Equipment ID	Fleet	Brand	Type	Profile
☐ SET					Oil serv. SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BW 154 AP-4 AM - 60 2041	BOMAG	BOMAG	Tandem Roller	Oil serv.
☒	BW 174 AP-4 AM - 70 1158	BOMAG	BOMAG	Tandem Roller	Oil serv.
☒	BW 213 DH-4 - 06 1086	BOMAG	BOMAG	Single Drum Roller	Oil serv.
☒	BW 213 DH-4 - 14 1370	BOMAG	BOMAG	Single Drum Roller	Oil serv.
☒	BW 213 DH-4 BVC - 16 1178	BOMAG	BOMAG	Single Drum Roller	Oil serv.
☒	BW 213 DI - 06 1066	BOMAG	BOMAG	Single Drum Roller	Oil serv.
☒	BW 80 AD-2 - 42 8113	BOMAG	BOMAG	Tandem Roller	Oil serv.
☒	MPH 122-2 - 07 1008	BOMAG	BOMAG	Recycler	Oil serv.
☒	MPH 125 - 20 1004	BOMAG	BOMAG	Recycler	Oil serv.

Save changes Undo

- Select the machines by tagging the check boxes to the left of each machine name.
- Select a profile name from the drop down menu in the profile column.
- Click on the “SET” button located in the profile column.
- To cancel selections, click on the “Undo” button

Administration

- Click on the “Save changes” button.

To assign a “Curfew” profile to all machines

- Filter the machines.
- Select the machines by tagging the check boxes to the left of each machine name.

Configuration: Maintenance - 30 Results

Selected	Event ID	Fleet	Brand	Type	Profile
☐ SET					Oil ser SET
NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER	NO FILTER
☒	BW 154 AP-4 AM - 60/2041	BOMAG Rental	BOMAG	Tandem Roller	Oil servic

- Tag the check box in the header of the first column and click on “SET”.
- Select a profile name in the header of the Profile column and click on “SET”.

Save changes	Undo
---------------------	-------------

- To cancel selections click on the “Undo” button and wait a few seconds for the application to refresh the screen.
- Click on “Save changes”

Click on “Ok” to confirm changes.

5.15 (Alarm) “Notification groups [Edit]” function


Using the “Notification groups [Edit]” function enables the administrator and user to add or remove alarm notification groups and add, edit, delete and assign system users and external users to/from each “Notification group”.

The function is used in different dialogs. The example below describes the configuration based on “Administration → Power Management”.

Definitions

- System users are company personnel who have access to and will use the BOMAG TELEMATIC web application.
- External users are company personnel such as “Security”, who do not have (or need) access to the BOMAG TELEMATIC web application. However, in case of theft, they require short-term notification via an alarm notification.

To create a new “Notification group”

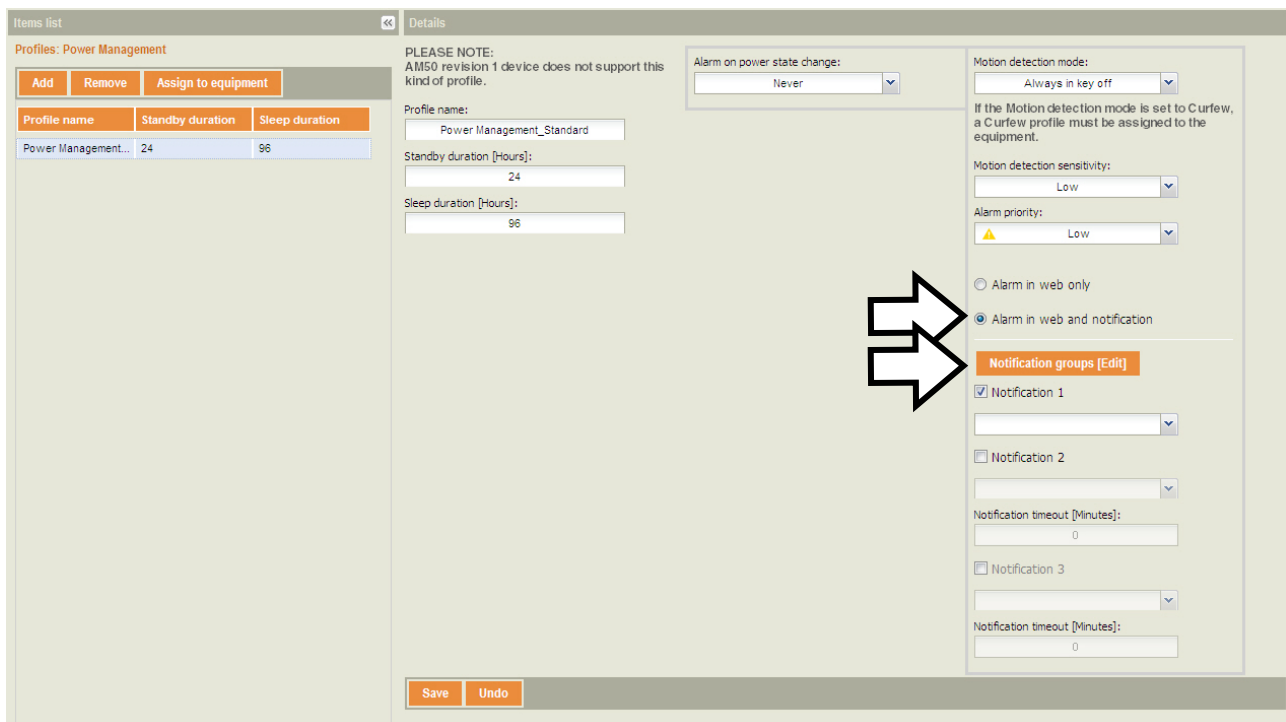

Items list << Details

Profiles: Power Management

Add Remove Assign to equipment

Profile name	Standby duration	Sleep duration
Power Management...	24	96

PLEASE NOTE:
AMS0 revision 1 device does not support this kind of profile.

Profile name:
Power Management_Standard

Standby duration [Hours]:
24

Sleep duration [Hours]:
96

Alarm on power state change:
Never

Motion detection mode:
Always in key off

If the Motion detection mode is set to Curfew, a Curfew profile must be assigned to the equipment.

Motion detection sensitivity:
Low

Alarm priority:
Low

☐ Alarm in web only
☒ Alarm in web and notification

Notification groups [Edit]

☒ Notification 1
[Dropdown]

☐ Notification 2
[Dropdown]

Notification timeout [Minutes]:
0

☐ Notification 3
[Dropdown]

Notification timeout [Minutes]:
0

Save Undo

- In the “Items list”, select the profile name (or description) to which you would like to add a new “Notification group”.
- To activate the “Notification groups [Edit]” button, click on the radio button to the left of “Alarm in web and notification”.
- Click the “Notification groups [Edit]” button. The “Notification groups” popup screen appears.

The screenshot shows the BOMAG administration interface. On the left, there's a sidebar with 'Notification groups' selected. The main area has a 'Name' input field with a placeholder 'Insert group name'. Below it, there are two tables: 'System users' and 'External users'. The 'System users' table has a checkbox next to 'Mustermann Max'. The 'External users' table is empty. Below the tables are 'Add' and 'Edit' buttons. At the bottom, there's a 'User Settings' section with fields for 'Name', 'Surname', 'Language', 'User Settings', 'Time Zone', and 'Email address', along with 'Save', 'Delete', 'Cancel', 'Save', and 'Undo' buttons.

- In the “Notification groups” section, click on the “Add” button.
A new line [Insert group name] is added to the top of the list of “Notification groups”.
- Enter a new “Notification group name” at the top of the screen.
- In the “Systems user” section, select at least one system user by tagging the check box to the left of the name and tag also the “SMS” and/or “Email” box(es).

Note


All System users granted access to the application will be listed in the “System users” section.

If the e-mail address has not been verified by the system, the “Email” box will not be visible in the list of “System users”.

To verify a system user's e-mail address you need to set him up either under the “Administration → User” or “Administration → User Settings” sections.

- Click on “Save”.
- Click on “Ok” to confirm save process has successfully completed.

To remove a “Notification Group”

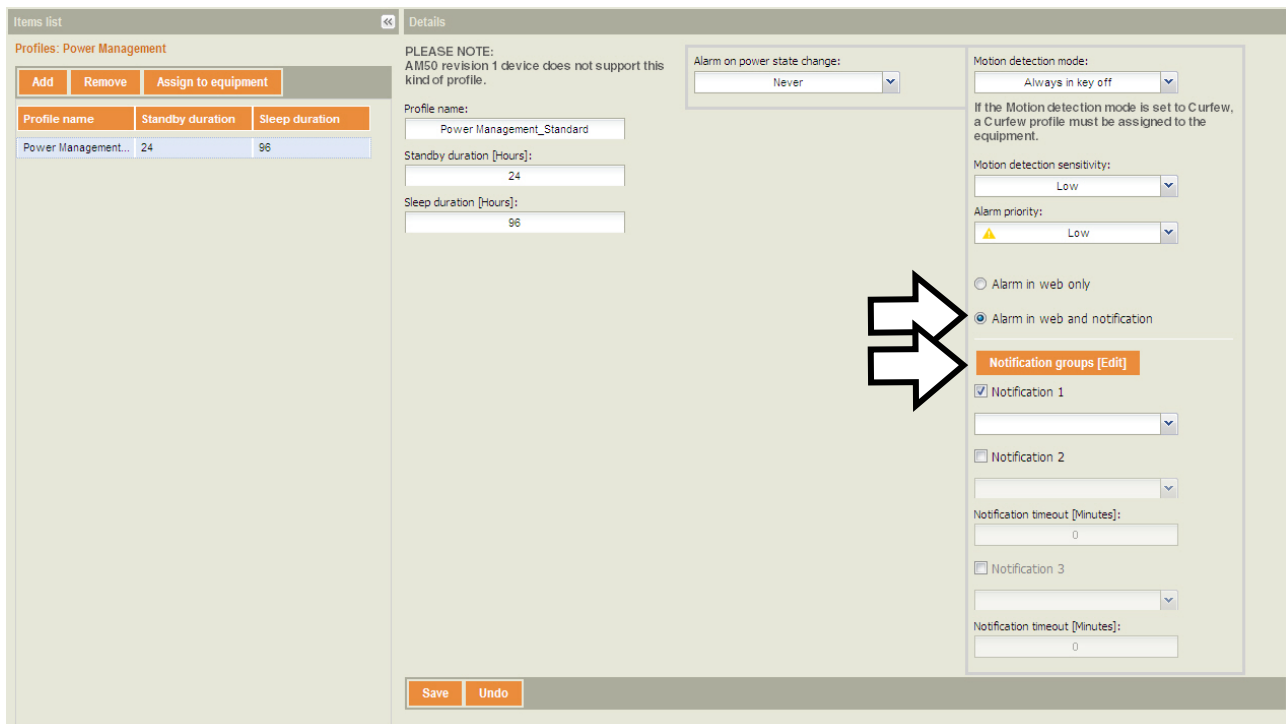

Items list << Details

Profiles: Power Management

Add Remove Assign to equipment

Profile name	Standby duration	Sleep duration
Power Management...	24	96

PLEASE NOTE:
AMS0 revision 1 device does not support this kind of profile.

Profile name: Power Management_Standard

Standby duration [Hours]: 24

Sleep duration [Hours]: 96

Alarm on power state change: Never

Motion detection mode: Always in key off

If the Motion detection mode is set to Curfew, a Curfew profile must be assigned to the equipment.

Motion detection sensitivity: Low

Alarm priority: Low

☐ Alarm in web only

☒ Alarm in web and notification

Notification groups [Edit]

☒ Notification 1

☐ Notification 2


☐ Notification 3

Notification timeout [Minutes]: 0

Notification timeout [Minutes]: 0

Save Undo

- In the “Items list”, select the profile name (or description).
- From the “Items list”, select the “Profile name” (or description) you would like to delete by clicking on the cell.
- Click on the radio button to the left of “Alarm in web notification”.
- Click on the “Notification groups [Edit]” button.

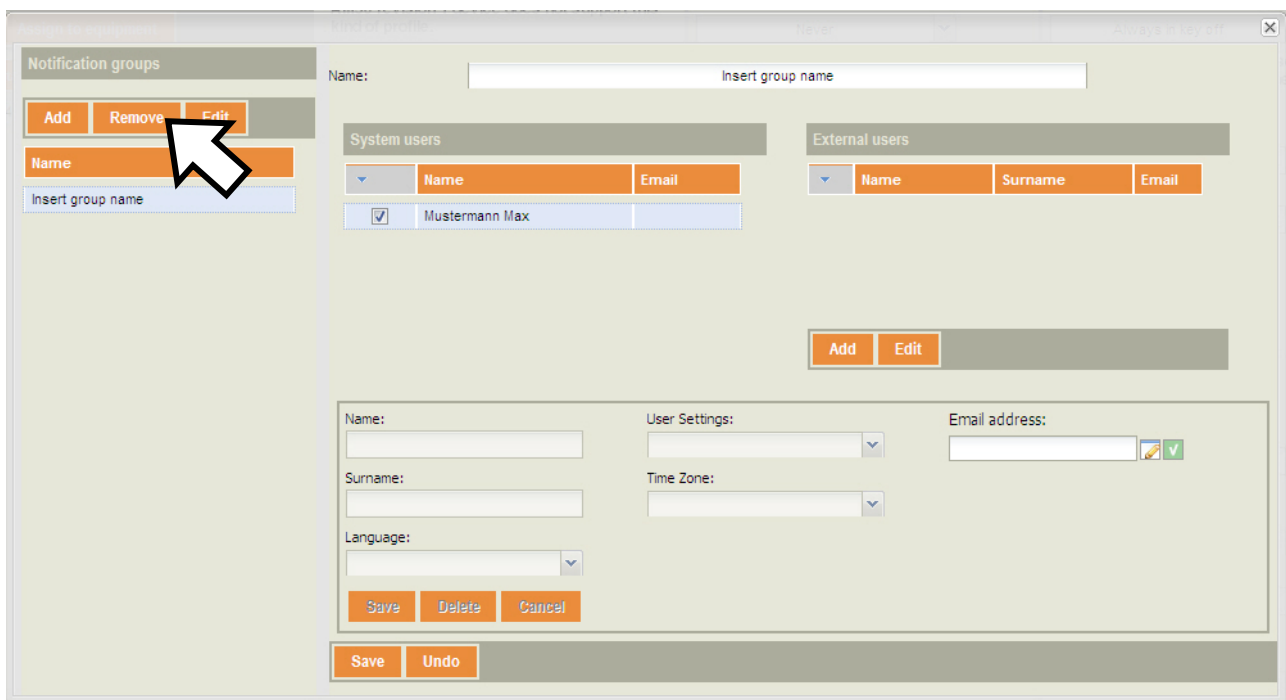

Notification groups

Add Remove Edit

Name: Insert group name

Name	Email
☒ Mustermann Max	

External users

Name	Surname	Email

Add Edit

Name: Surname: Language: User Settings: Time Zone: Email address:

Save Delete Cancel

Save Undo

Administration

- Under the “Notification groups” section (upper left), select the notification group you wish to remove.
- Click on the “Remove” button.
- Click on “Ok” on the popup “Confirm item delete” screen.

The “Notification group” is immediately removed.

To assign “System Users”

- In the “Items list”, select the profile name (or description).
- Click on the radio button to the left of “Alarm in web notification”. This activates the “Notification groups [Edit]” button.
- Click on the “Notification groups [Edit]” button.

The screenshot shows the BOMAG TELEMATIC administration interface. On the left, under the 'Notification groups' section, there are 'Add', 'Remove', and 'Edit' buttons. A mouse cursor is pointing at the 'Edit' button. Below these buttons is a table with a header 'Name' and a single row containing 'Insert group name'. To the right of this table is a 'Name' input field with the placeholder text 'Insert group name'. Below the 'Name' input field is a 'System users' section with a table. The table has a header with 'Name' and 'Email' columns. The first row has a checked checkbox, the name 'Mustermann Max', and an empty 'Email' field. To the right of the 'System users' table is an 'External users' section with a table. The table has a header with 'Name', 'Surname', and 'Email' columns. Below the 'System users' and 'External users' tables are 'Add' and 'Edit' buttons. At the bottom of the interface is a 'User Settings' section with input fields for 'Name', 'Surname', 'Language', 'User Settings', 'Time Zone', and 'Email address'. There are 'Save', 'Delete', and 'Cancel' buttons below the 'User Settings' section. At the very bottom of the interface are 'Save' and 'Undo' buttons.

- Click on the name of the “Notification group” you wish to add a system user to.
- Click on the “Edit” button.
- Under the “Systems user” section, tag the box to the left of the system user’s name and tag the checkbox “Email”.

You may select as many names as you wish to add.

To add “External Users”

- In the “Items list”, select the profile name (or description).
- Click on the radio button to the left of “Alarm in web notification”. This activates the “Notification groups [Edit]” button.
- Click on the “Notification groups [Edit]” button.

The screenshot shows the BOMAG administration interface. On the left, under 'Notification groups', there is a table with columns 'Name', 'Add', 'Remove', and 'Edit'. A white arrow points to the 'Edit' button. In the center, there are sections for 'System users' and 'External users'. The 'External users' section has a table with columns 'Name', 'Surname', and 'Email'. Below this table, there are 'Add' and 'Edit' buttons. A white arrow points to the 'Add' button. At the bottom, there is a 'User Settings' section with fields for 'Name', 'Surname', 'Language', 'User Settings' (a dropdown menu), 'Time Zone' (a dropdown menu), and 'Email address' (a text field with an 'Edit' icon and a red 'X' icon). Below the 'User Settings' section are 'Save', 'Delete', and 'Cancel' buttons. At the very bottom are 'Save' and 'Undo' buttons.

- Click on the name of the “Notification group” you wish to add a new external user to.
- Click on the “Edit” button.
- In the “External users” section, click on the “Add” button. This activates the “User Settings:” section.
- In the “User Settings:” section, enter information concerning the external user and select from drop down menus.

To add an Email address

This is a close-up of the 'Email address' field in the 'User Settings' section. It shows a text input field followed by an 'Edit' icon (a small square with a pencil) and a red 'X' icon. A white arrow points to the 'Edit' icon.

- o Click on the “Edit” icon.
- o In the popup edit box, enter the email address, click on “OK”.
- o Access your email account and locate the verification Email.
- o Copy the verification code.
- o Click on the  icon.
- o Paste or enter the verification code from the email into the verification code popup screen.
- o Click on “OK”.

The  icon will immediately change to the  icon.

The screenshot displays the BOMAG Administration interface. At the top, there are tabs for 'Return to equipment', 'List of people', 'Never', and 'Always stay on'. The main content area is divided into several sections:

- Notification groups:** Includes buttons for 'Add', 'Remove', and 'Edit'. Below these is a table with a header 'Name' and a single row containing 'Insert group name'.
- System users:** A table with columns 'Name' and 'Email'. It contains one entry: 'Mustermann Max' with a checked checkbox in the first column.
- External users:** A table with columns 'Name', 'Surname', and 'Email'. It contains one entry: 'Name' with 'Surname' in the 'Surname' column.
- User Settings:** A form with fields for 'Name' (containing 'Name'), 'Surname' (containing 'Surname'), 'Language' (set to 'French'), 'User Settings' (set to 'International'), 'Time Zone' (set to 'GMT+01:00 Amsterdam, Berlin, ...'), and 'Email address' (containing a red 'X' icon). Below these fields are 'Save', 'Delete', and 'Cancel' buttons.

At the bottom of the interface, there are 'Save' and 'Undo' buttons.

- To cancel changes click on the “Cancel” button.
- To add other new external users, repeat the above steps.
- Click on the “Save” button.
- Click on “Ok” to confirm verification has complete successfully.
- Click on the “Save” button at the bottom of the screen.

Note

All System users granted access to the application will be listed in the “System users” section.

If the e-mail address has not been verified by the system, the “Email” box will not be visible in the list of system users.

To verify the e-mail address of a system user you need to set it up in either the “Administration → User” or “Administration → User Settings” sections.

To assign “External Users”

- In the “System user” section, you must select at least one system user by tagging the box to the left of their name.
- In the “External user” section, tag the box to the left of the external user’s name and tag also the “SMS” and/or “Email” box(es).

Note

If the e-mail address has not been verified by the system, the “Email” box will not be visible.

- Click on the “Save” button at the bottom of the screen.
- To assign other external users to the same alarm notifications group, repeat the above steps.

To edit “External User” information

The screenshot displays the BOMAG administration interface. On the left, a sidebar contains 'Notification groups' with 'Add', 'Remove', and 'Edit' buttons. The main area is divided into 'System users' and 'External users' sections. The 'System users' table lists 'Mustermann Max'. The 'External users' table is currently empty. Below the 'External users' table, an 'Edit' button is highlighted with a large white arrow. At the bottom, the 'User Settings' section contains fields for Name, Surname, Language (set to French), User Settings (set to International), Time Zone (set to GMT+01:00), and Email address. A 'Save' button is highlighted with a large white arrow. At the very bottom, there are 'Save' and 'Undo' buttons.

- Click on the “Edit” button to activate the fields “Systems users” and “External users”.
- Under “External users”, click on the name of the User you wish to edit then click on the “Edit” button below the list of names. The “User Settings” section is activated.
- In the “User Settings:” section, enter information concerning the external user and select from drop down menus.
- To cancel changes simply click on the “Cancel” button.
- Click on “Save”
- Click on “Ok” to confirm verification has been completed successfully.
- Click on the “Save” button at the bottom of the screen.

To delete an “External User”

The screenshot shows the BOMAG administration interface. On the left, under 'Notification groups', there are 'Add', 'Remove', and 'Edit' buttons. An arrow points to the 'Edit' button. The main area has a 'Name' field with 'Insert group name'. Below this are two sections: 'System users' and 'External users'. The 'System users' section has a table with columns 'Name' and 'Email', containing one entry 'Mustermann Max'. The 'External users' section has a table with columns 'Name', 'Surname', and 'Email', containing one entry 'Name', 'Surname'. Below these is an 'Add' and 'Edit' button. An arrow points to the 'Edit' button. At the bottom is the 'User Settings' section with fields for 'Name', 'Surname', 'Language' (set to 'French'), 'User Settings' (set to 'International'), 'Time Zone' (set to 'GMT+01:00 Amsterdam, Berlin, ...'), and 'Email address'. There are 'Save', 'Delete', and 'Cancel' buttons. An arrow points to the 'Delete' button. At the very bottom are 'Save' and 'Undo' buttons.

- Click on the group “Name” the user you want to delete is assigned to.
- Click on the “Edit” button to activate the fields “Systems users” and “External users”.
- Under “External users”, click on the name of the User you want to delete and click on the “Edit” button. The “User Settings” section is activated.
- Click on the “Delete” button at the bottom of the “User Settings” section then click on “Ok” to confirm deletion.

The “External User” is removed.

Set the alarm

Now that you have setup your (alarm) notification groups, system users and external users, it is time to set the alarm.

Items list | Details

Profiles: Power Management

Add Remove Assign to equipment

Profile name	Standby duration	Sleep duration
Power Management...	24	96

PLEASE NOTE:
AM50 revision 1 device does not support this kind of profile.

Profile name:
Power Management_Standard

Standby duration [Hours]:
24

Sleep duration [Hours]:
96

Alarm on power state change:
Never

Motion detection mode:
Always in key off

If the Motion detection mode is set to Curfew, a Curfew profile must be assigned to the equipment.

Motion detection sensitivity:
Low

Alarm priority:
Low

☐ Alarm in web only
☒ Alarm in web and notification

Notification groups [Edit]

☒ Notification 1
[Dropdown]

☐ Notification 2
[Dropdown]

Notification timeout [Minutes]:
0

☐ Notification 3
[Dropdown]

Notification timeout [Minutes]:
0

Save Undo

- In the “Items list” select the profile name you want to set the alarm for.
- Select an “Alarm priority:” from the drop down menu. There are four “Alarm Priorities” available to select from:
 - o Null: The fence will be used only to provide data used for “Job Costing Report”.
 - o Low: The fence will be used to provide data for “Job Costing” and to send out alarms when the machine breaks a fence.
 - o Medium: The fence will be used to provide data for “Job Costing” and to send out alarms when the machine breaks a fence.
 - o High: The fence will be used to provide data for “Job Costing” and to send out alarms when the machine breaks a fence.

Note

The color coding of the above “Alarm Priorities” only serves as a label and is provided for your convenience. You may assign Low, Medium, and High as you so desire.

The color coded alarm priority will appear in the “Status” column of the “Alarms window” at the bottom of every screen in the application.

- Select one alarm notification method by clicking on the radio button to the left. Your choices are:
 - o Alarm in web only: If selected, alarm notification via e-mail will not be sent. The User and/or notification group(s) will only be able to view alarms on the web site.
 - o Alarm in web and notification: If selected, the User and/or notification group(s) will be able to view alarms on the web site and, depending on whether or not an email address was entered in their “User” or “User Settings” profile setup, will determine how they receive an alarm notification; via e-mail.
- Select who is to be notified and how many times an alarm notification is sent. Your choices are:

Notification 1:

If selected, an alarm notification will be sent as per the user's profile setup; via e-mail.

- o Tag the check box to the left of Notification 1, then click on the drop down arrow to select the notification group.
- o If this is the only notification you will be setting, click the "Ok" button in the lower left corner, otherwise, continue below.

Notification 2 & Notification timeout [Minutes]:

If notification 2 is enabled and if no one marks the alarm as read before the "Notification 2 timeout", the system notifies Users assigned to notification 2 Group

- o Tag the check box to the left of Notification 2 then click on the drop down arrow to select the notification group.
- o Enter the number of minutes for notification timeout.
- o If you have finished setting your notifications, click on the "Ok" button, otherwise continue below.

Notification 3 & Notification timeout [Minutes]:

If Notification 3 is enabled and if no one marks the alarm as read before the "Notification 3 timeout", the system notifies users assigned to notification 3 Group.

- o Tag the check box to the left of Notification 3 then click on the drop down arrow to select the notification group.
- o Enter the number of minutes for notification timeout.
- o Click on "Ok".
- Click on "Save".

Note

If you require further information please contact:

E-Mail: service.telematic@bomag.com